

## IMPLEMENTING ARTIFICIAL NEURAL NETWORKS FOR AN APPLICATION USING PYTHON – REGRESSION

### Regression using Artificial Neural Networks


Why do we need to use Artificial Neural Networks for Regression instead of simply using Linear Regression?

The purpose of using Artificial Neural Networks for Regression over Linear Regression is that the linear regression can only learn the linear relationship between the features and target and therefore cannot learn the complex non-linear relationship. In order to learn the complex non-linear relationship between the features and target, we are in need of other techniques. One of those techniques is to use Artificial Neural Networks. Artificial Neural Networks have the ability to learn the complex relationship between the features and target due to the presence of activation function in each layer. Let's look at what are Artificial Neural Networks and how do they work.

### Artificial Neural Networks

Artificial Neural Networks are one of the deep learning algorithms that simulate the workings of neurons in the human brain. There are many types of Artificial Neural Networks, Vanilla Neural Networks, Recurrent Neural Networks, and Convolutional Neural Networks. The Vanilla Neural Networks have the ability to handle structured data only, whereas the Recurrent Neural Networks and Convolutional Neural Networks have the ability to handle unstructured data very well. In this post, we are going to use Vanilla Neural Networks to perform the Regression Analysis.

### Structure of Artificial Neural Networks

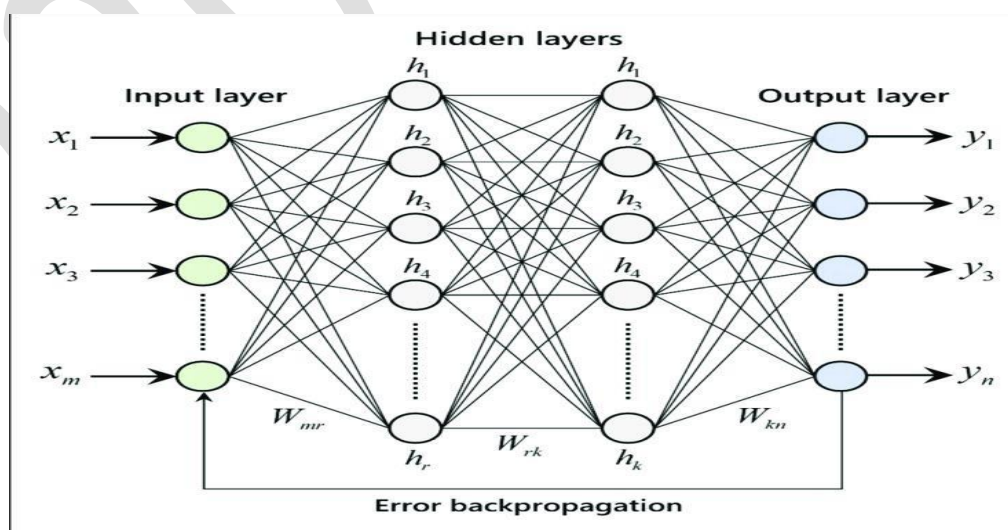

The Artificial Neural Networks consists of the Input layer, Hidden layers, Output layer. The hidden layer can be more than one in number. Each layer consists of n number of neurons. Each layer will be having an Activation Function associated with each of the neurons. The

activation function is the function that is responsible for introducing non-linearity in the relationship. In our case, the output layer must contain a linear activation function. Each layer can also have regularizers associated with it. Regularizers are responsible for preventing overfitting.

Artificial Neural Networks consists of two phases,

- Forward Propagation
- Backward Propagation

Forward propagation is the process of multiplying weights with each feature and adding them. The bias is also added to the result.

Backward propagation is the process of updating the weights in the model. Backward propagation requires an optimization function and a loss function.

### **AIM:**

To implement artificial neural networks for an application in Regression using python.

### **PROGRAM:**

```
import numpy as np
from keras.models import Sequential
from keras.layers import Dense
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.datasets import make_regression
X, y = make_regression(n_samples=1000, n_features=5, noise=0.1)
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)
scaler = StandardScaler()
X_train = scaler.fit_transform(X_train)
X_test = scaler.transform(X_test)
model = Sequential()
model.add(Dense(units=64, activation='relu', input_dim=X_train.shape[1]))
model.add(Dense(units=32, activation='relu'))
model.add(Dense(units=1, activation='linear'))
model.compile(optimizer='adam', loss='mean_squared_error')
model.fit(X_train, y_train, epochs=5, batch_size=32, verbose=1)
loss = model.evaluate(X_test, y_test)
print(f'Model Loss: {loss}')
y_pred = model.predict(X_test)
print("Predictions for the first 5 test samples:", y_pred[:5])
```

## OUTPUT:

```
220701040.ipynb ☆
File Edit View Insert Runtime Tools Help All changes saved

+ Code + Text

/usr/local/lib/python3.10/dist-packages/keras/src/layers/core/dense.py:87: UserWarning: Do not pass an `input_shape`/`input_dim` argument to a layer. When using Sequential models, prefer using an `Input(shape)`
super().__init__(activity_regularizer=activity_regularizer, **kwargs)
Epoch 1/10
19/19 ━━━━━━━━━━━ 4s 2ms/step - loss: 18106.0762
Epoch 2/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 18258.2852
Epoch 3/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 16864.4570
Epoch 4/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 15418.2998
Epoch 5/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 10686.8652
Epoch 6/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 4002.9219
Epoch 7/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 687.1014
Epoch 8/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 179.1618
Epoch 9/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 106.7710
Epoch 10/10
19/19 ━━━━━━━━━━━ 0s 2ms/step - loss: 80.3700
10/10 ━━━━━━━━━━━ 0s 2ms/step - loss: 61.9631
Model Loss: 70.17957305908203
10/10 ━━━━━━━━━━━ 0s 5ms/step
Predictions for the first 5 test samples: [[ 105.23146 ]
[-186.1991 ]
[ -12.644114]
[ -65.81679 ]
[ -21.63176 ]]
```

## RESULT:

Thus , we have successfully implemented artificial neural networks for an application in regression using python.