


Win1 × Win2 × Router ×

```
Router(config)#
Router(config)#ping 50.0.0.10
^
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
Router#
Router#
*Aug 15 14:37:44.106: %SYS-5-CONFIG_I: Configured from console by console
Router#disable
Router>
Router>
Router>
Router>ping 50.0.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 50.0.0.10, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
Router>
Router>
Router>
Router>ping 60.0.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 60.0.0.10, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
Router>
Router>
Router>
Router>
```

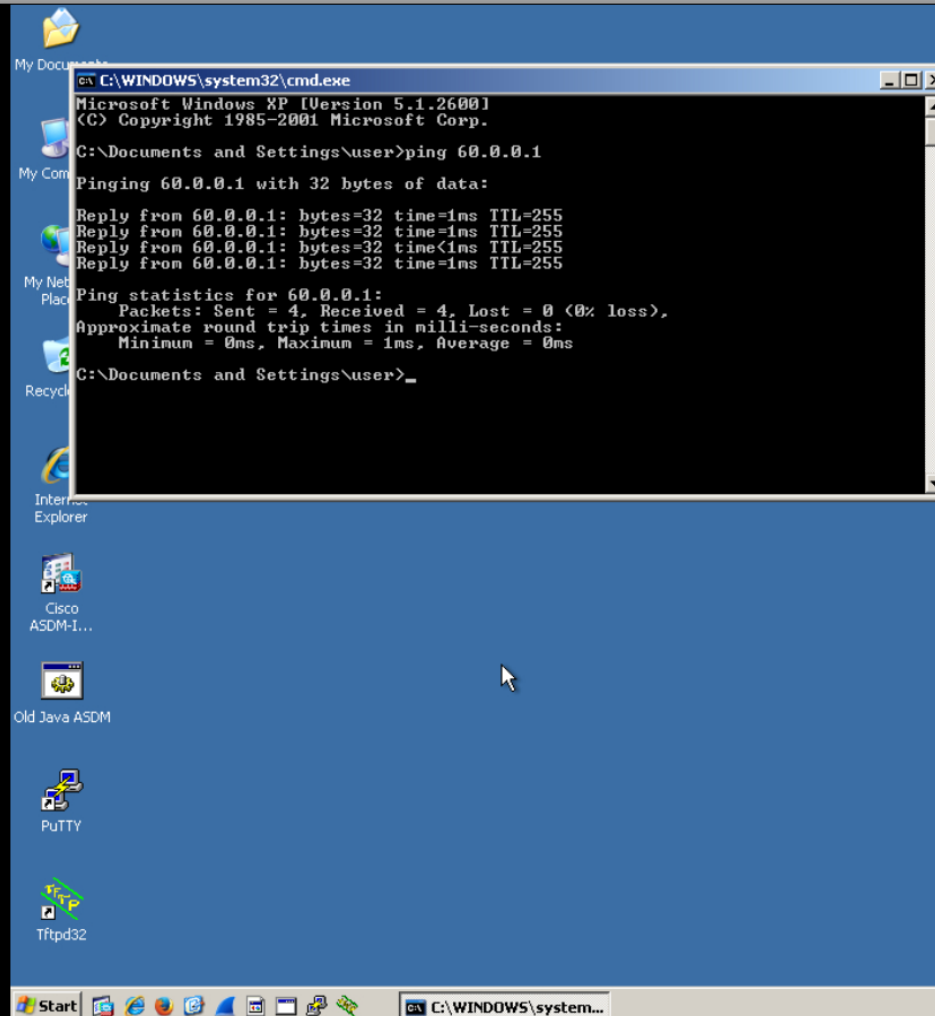

The screenshot shows a Windows XP desktop environment. A command prompt window is open, displaying the results of a ping command. The desktop background is blue. On the left side, there is a vertical taskbar with icons for 'My Documents', 'My Computer', 'My Network Places', 'Recycle Bin', 'Internet Explorer', 'Cisco ASDM-1...', 'Old Java ASDM', 'PuTTY', and 'Tftpd32'. The taskbar at the bottom includes the Start button, several application icons, and a system tray showing the time as 3:33 PM and the date as 8/15/2026.

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 60.0.0.1

Pinging 60.0.0.1 with 32 bytes of data:

Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255
Reply from 60.0.0.1: bytes=32 time=1ms TTL=255

Ping statistics for 60.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>
```



Search

31°C
Partly cloudy8:03 PM
8/15/2026