
Figure 19.10 *A NAT implementation*

Network Address Translation (NAT)

NAT enables a user to have a large set of addresses internally and one address, or a small set of addresses, externally.

The traffic inside can use the large set; the traffic outside, the small set.

Site using private addresses

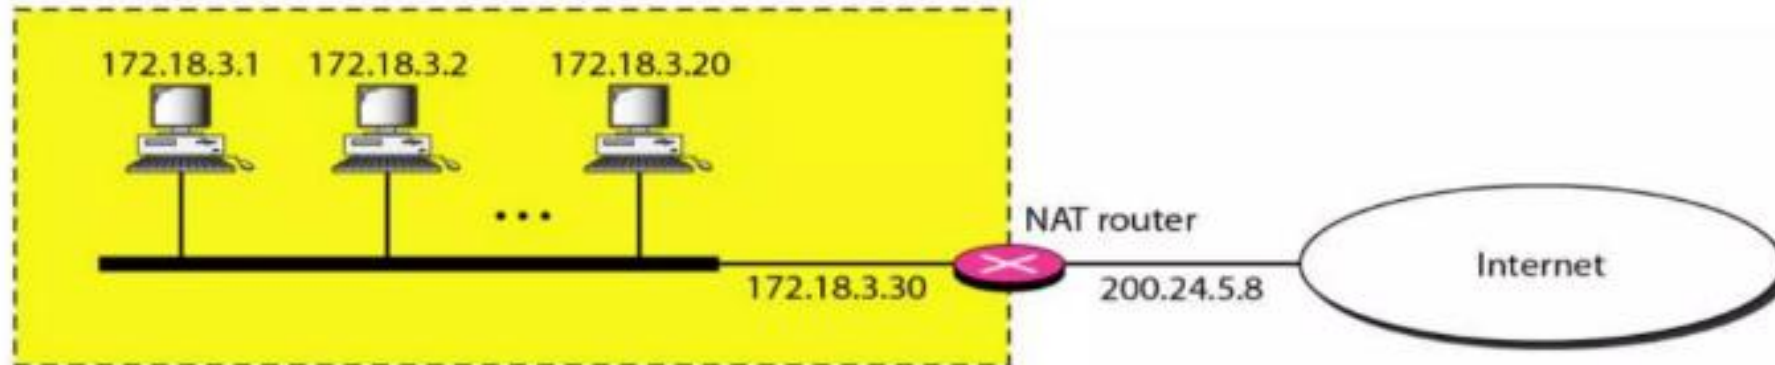


Figure 19.11 *Addresses in a NAT*

Address translation

All the outgoing packets go through the NAT router, which replaces the source address in the packet with the global NAT address.

All incoming packets also pass through the NAT router, which replaces the destination address in the packet (the NAT router global address) with the appropriate private address.

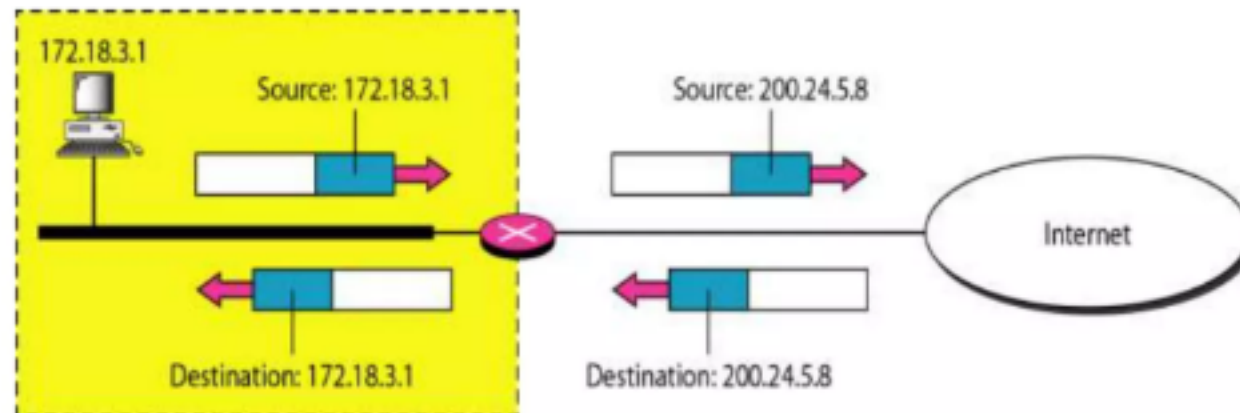


Figure 19.12 *NAT address translation*

