**Playwright enables reliable web automation for testing, scripting, and AI agents.**

One API to drive Chromium, Firefox, and WebKit — in your tests, your scripts, and your agent workflows. Available for TypeScript, Python, .NET, and Java.

**Installation**

**Introduction**

Playwright Test is an end-to-end test framework for modern web apps. It bundles test runner, assertions, isolation, parallelization and rich tooling. Playwright supports Chromium, WebKit and Firefox on Windows, Linux and macOS, locally or in CI, headless or headed, with native mobile emulation for Chrome (Android) and Mobile Safari.

**You will learn**

- How to install Playwright
- What's installed
- How to run the example test
- How to open the HTML test report

**Installing Playwright**

Get started by installing Playwright using one of the following methods.

**Using npm, yarn or pnpm**

The command below either initializes a new project or adds Playwright to an existing one.

- **npm**
- **yarn**
- **pnpm**

npm init playwright@latest

When prompted, choose / confirm:

- TypeScript or JavaScript (default: TypeScript)
- Tests folder name (default: tests, or e2e if tests already exists)
- Add a GitHub Actions workflow (recommended for CI)
- Install Playwright browsers (default: yes)

You can re-run the command later; it does not overwrite existing tests.

**Using the VS Code Extension**

You can also create and run tests with the VS Code Extension.

**What's Installed**

Playwright downloads required browser binaries and creates the scaffold below.

playwright.config.ts *# Test configuration*

package.json

package-lock.json *# Or yarn.lock / pnpm-lock.yaml*

tests/

example.spec.ts *# Minimal example test*

The playwright.config centralizes configuration: target browsers, timeouts, retries, projects, reporters and more. In existing projects dependencies are added to your current package.json.


tests/ contains a minimal starter test.

**Running the Example Test**

By default tests run headless in parallel across Chromium, Firefox and WebKit (configurable in playwright.config). Output and aggregated results display in the terminal.

- **npm**
- **yarn**
- **pnpm**

npx playwright test

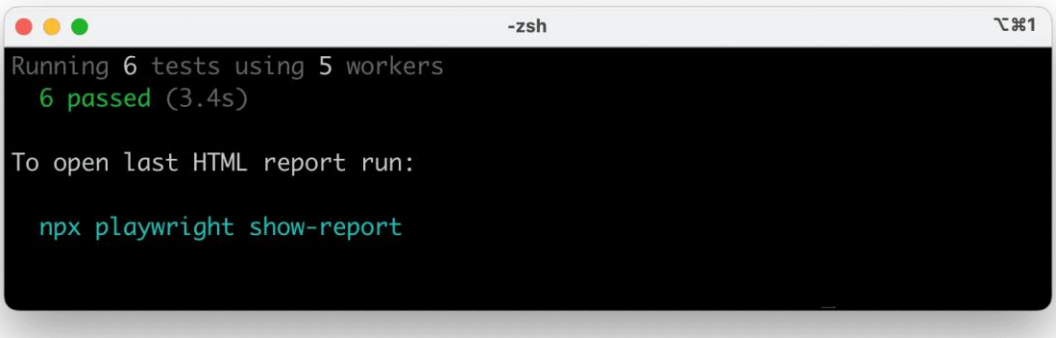


Tips:

- See the browser window: add --headed.
- Run a single project/browser: --project=chromium.
- Run one file: npx playwright test tests/example.spec.ts.
- Open testing UI: --ui.

See Running Tests for details on filtering, headed mode, sharding and retries.

**HTML Test Reports**

After a test run, the HTML Reporter provides a dashboard filterable by the browser, passed, failed, skipped, flaky and more. Click a test to inspect errors, attachments and steps. It auto-opens only when failures occur; open manually with the command below.

- **npm**
- **yarn**
- **pnpm**

npx playwright show-report

