


Figure 4 — The resolution ladder, with the analysis window held fixed

fixed-tN: the 1400 ms analysis window is HELD FIXED and only the number of frames varies. This is the axis that isolates resolution from sequence length. n = 12 per rung.

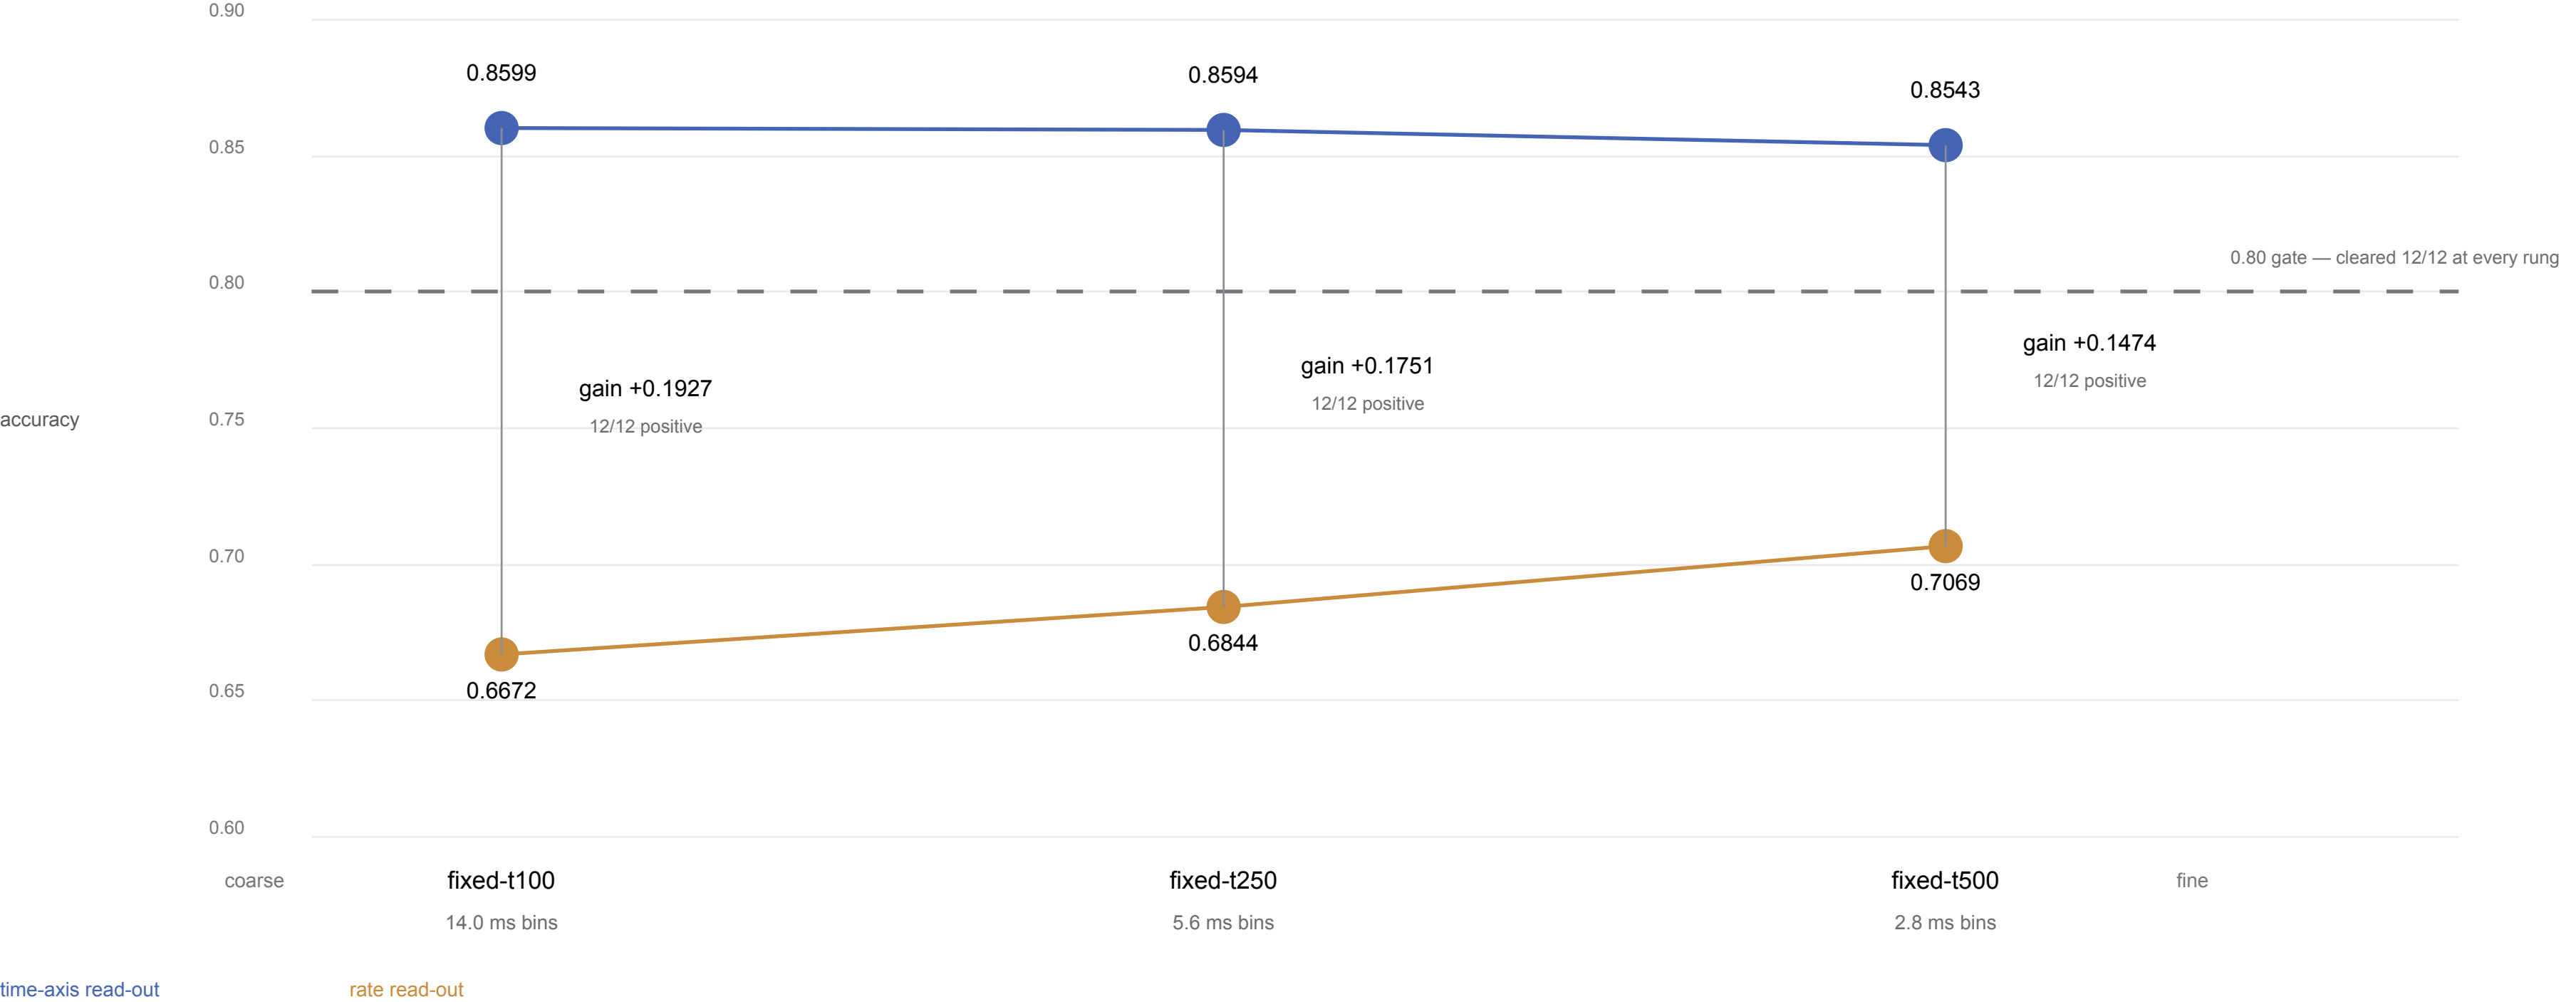

The advantage SHRINKS as bins get finer: $\text{gain}(\text{t500}) - \text{gain}(\text{t100}) = -0.0453$ against a two-sided bar of 0.03.

That is the opposite of the direction the withdrawn S-5 hypothesis predicted — now asked on an axis that isolates resolution from sequence length.

The rate baseline rises +0.0397 across the same ladder, inside the preregistered 0.05 confound bar. Both series are drawn because without the baseline the falling gain reads as the attention arm degrading, when what it shows is the rate arm catching up. So this is a property of the read-out, not of the substrate beneath it.

NOT DRAWN, and not drawable here: the published-Nms family, which moves bin width and sequence length together so no number from it can be attributed to either.

NO MECHANISM AND NO PREFERENCE. The paper offers no account of why the advantage shrinks and recommends no operating point. "Attention prefers coarse bins" is not carried by this.