fixed-tN: the 1400 ms analysis window is HELD FIXED and only the number of frames varies, which isolates resolution from sequence length. n = 12 per rung.

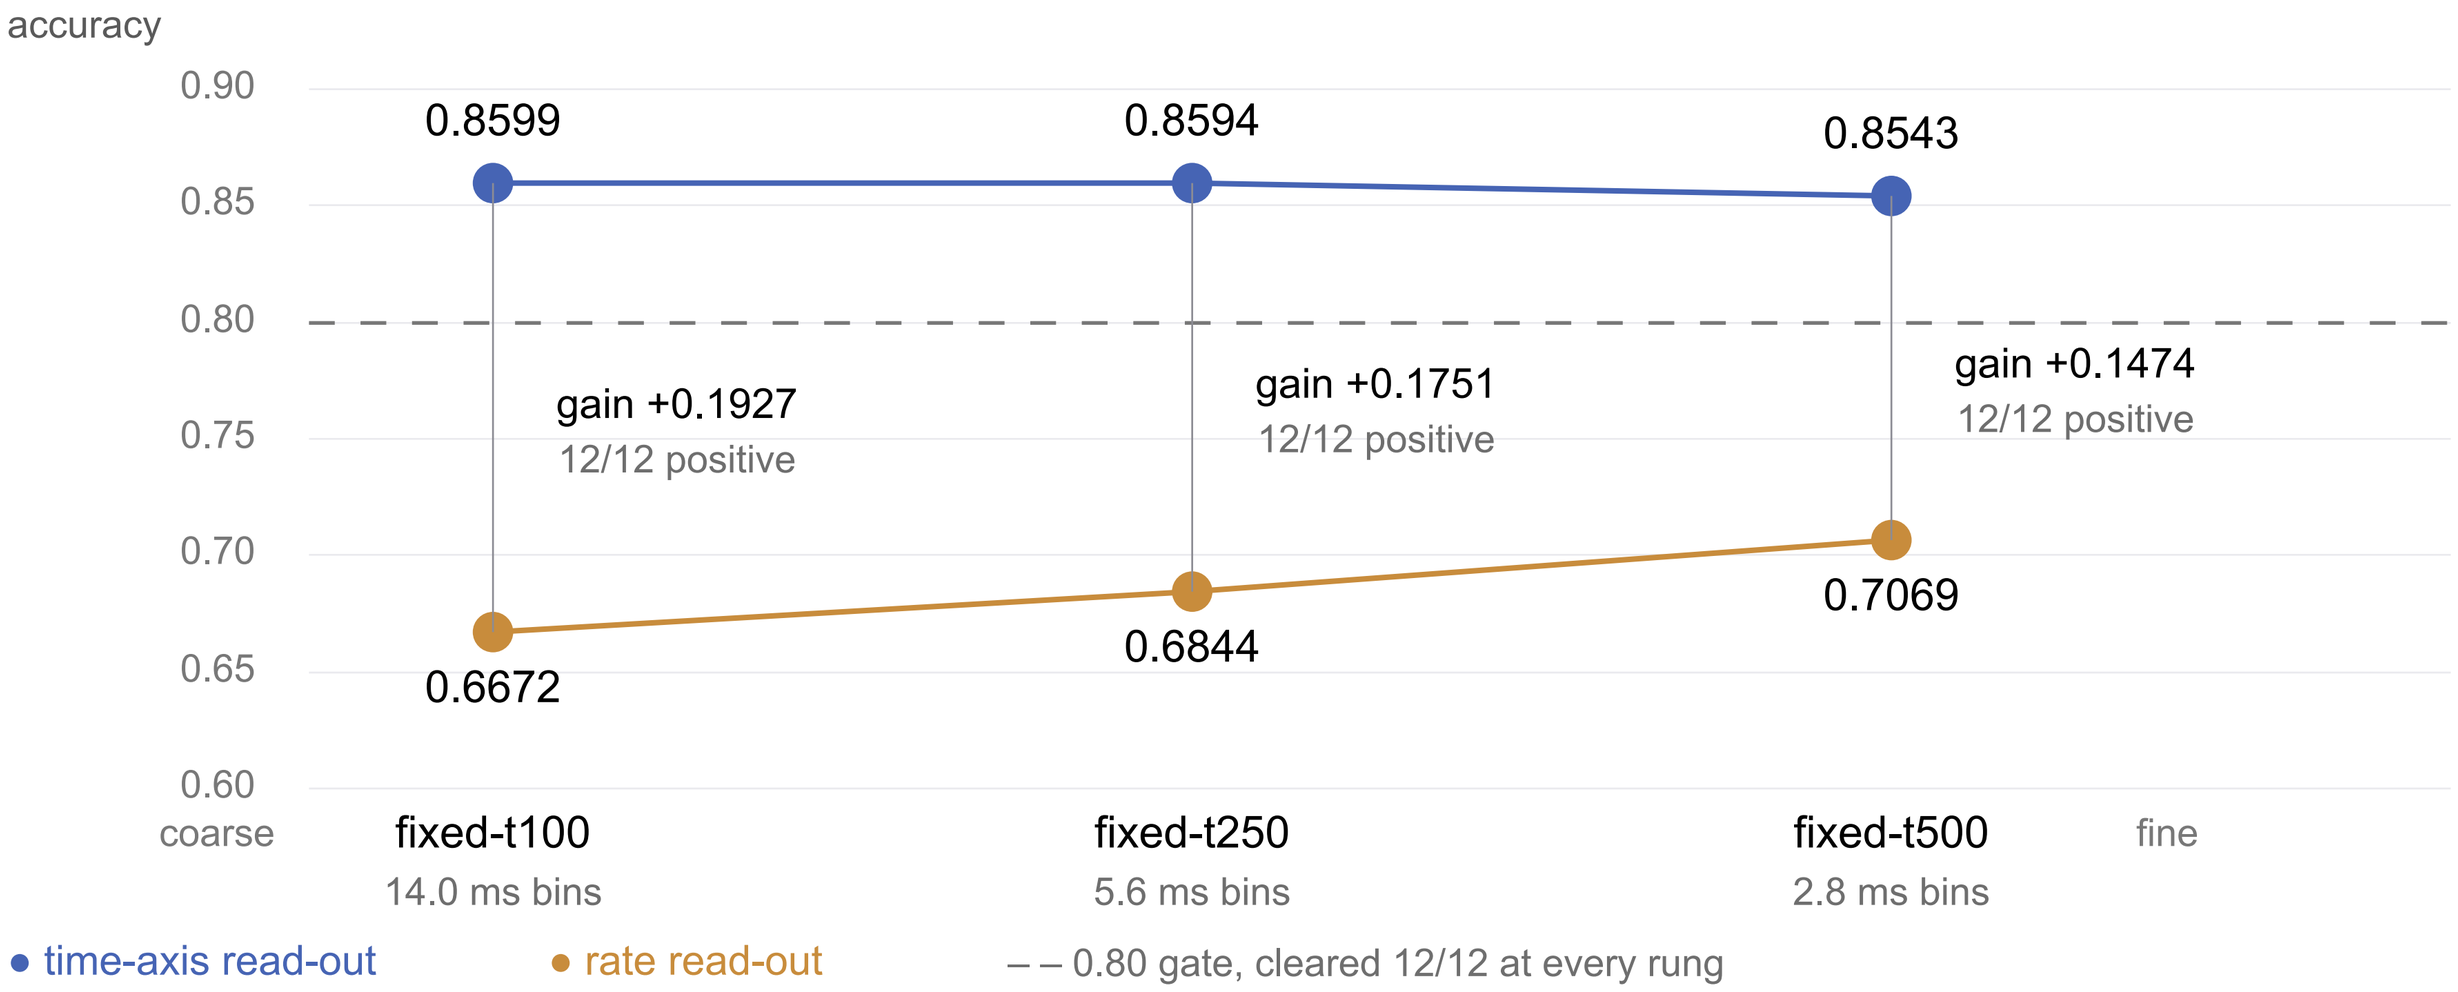

The advantage SHRINKS as bins get finer: gain(t500) − gain(t100) = -0.0453 against a two-sided bar of 0.03.

The rate baseline rises +0.0397 across the same ladder, inside the preregistered 0.05 confound bar. Both series are drawn because without it the falling gain reads as the attention arm degrading, when it is the rate arm catching up.

NOT DRAWN, and not drawable here: the published-Nms family, which moves bin width and sequence length together so no number from it can be attributed to either.

NO MECHANISM AND NO PREFERENCE. The paper offers no account of why the advantage shrinks and recommends no operating point. "Attention prefers coarse bins" is not carried by this.