

# CLOUD COMPUTING

## PRACTICAL 8:AMAZON SAGEMAKER

Bharvi Chavda

A006

### 1)Creating IAM ROLE and assigning sagemaker permission

The screenshot shows the 'Create role' wizard in the AWS IAM console. The breadcrumb navigation is 'IAM > Roles > Create role'. The left sidebar shows three steps: 'Step 1: Select trusted entity' (active), 'Step 2: Add permissions', and 'Step 3: Name, review, and create'. The main content area is titled 'Select trusted entity' with an 'Info' link. It contains two sections: 'Trusted entity type' and 'Use case'. In 'Trusted entity type', 'AWS service' is selected with a radio button. Other options include 'AWS account', 'Web identity', 'SAML 2.0 federation', and 'Custom trust policy'. The 'Use case' section has a description 'Allow an AWS service like EC2, Lambda, or others to perform actions in this account.' and a dropdown menu currently showing 'SageMaker'. Below the dropdown, it says 'Choose a use case for the specified service. Use case:' followed by two radio button options: 'SageMaker - Execution' (selected) and 'SageMaker - HyperPod Clusters'. At the bottom right of the main content area are 'Cancel' and 'Next' buttons.

**IAM Role is created.**

The screenshot shows the 'Add permissions' step of the 'Create role' wizard. The breadcrumb navigation is 'IAM > Roles > Create role'. The left sidebar shows 'Step 1: Select trusted entity' and 'Step 2: Add permissions' (active). The main content area is titled 'Add permissions' with an 'Info' link. It contains a section 'Permissions policies (1)' with an 'Info' link and a description: 'The type of role that you selected requires the following policy.' Below this is a table with two columns: 'Policy name' and 'Type'. The table has one row with the policy name 'AmazonSageMakerFullAccess' and type 'AWS managed'. Below the table is a section 'Set permissions boundary - optional' with a right-pointing arrow. At the bottom right of the main content area are 'Cancel', 'Previous', and 'Next' buttons.

### 2) creating s3 bucket named mygroup2

**General purpose buckets** | Directory buckets

**General purpose buckets (6)** [Info](#) [All AWS Regions](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
<a href="#">bucketcool2</a>	Europe (Stockholm) eu-north-1	<a href="#">View analyzer for eu-north-1</a>	August 31, 2024, 16:17:34 (UTC+05:30)
<a href="#">elasticbeanstalk-us-east-1-630422386614</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	September 14, 2024, 14:24:29 (UTC+05:30)
<a href="#">lightningbucket</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	July 27, 2024, 16:10:56 (UTC+05:30)
<a href="#">quickbu</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	August 30, 2024, 20:53:02 (UTC+05:30)
<a href="#">sagemaker-us-east-1-630422386614</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	October 24, 2024, 14:53:53 (UTC+05:30)
<a href="#">waterbucketwithnowater</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	July 27, 2024, 16:17:54 (UTC+05:30)

**Successfully created bucket "mygroup2"**  
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

Amazon S3 > Buckets

**Account snapshot - updated every 24 hours** [All AWS Regions](#)  
Storage lens provides visibility into storage usage and activity trends. [Learn more](#)

[View Storage Lens dashboard](#)

**General purpose buckets** | Directory buckets

**General purpose buckets (7)** [Info](#) [All AWS Regions](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
<a href="#">bucketcool2</a>	Europe (Stockholm) eu-north-1	<a href="#">View analyzer for eu-north-1</a>	August 31, 2024, 16:17:34 (UTC+05:30)
<a href="#">elasticbeanstalk-us-east-1-630422386614</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	September 14, 2024, 14:24:29 (UTC+05:30)
<a href="#">lightningbucket</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	July 27, 2024, 16:10:56 (UTC+05:30)
<a href="#">mygroup2</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	November 7, 2024, 12:02:07 (UTC+05:30)
<a href="#">quickbu</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	August 30, 2024, 20:53:02 (UTC+05:30)
<a href="#">sagemaker-us-east-1-630422386614</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	October 24, 2024, 14:53:53 (UTC+05:30)
<a href="#">waterbucketwithnowater</a>	US East (N. Virginia) us-east-1	<a href="#">View analyzer for us-east-1</a>	July 27, 2024, 16:17:54 (UTC+05:30)

### 3)open Amazon SageMaker console


Select Notebook instances and click create notebook instances

Here we will assign the IAM role created earlier i.e fraud\_detection

Amazon SageMaker > Notebooks and Git Repos

## Notebooks and Git repos

▼ Try the new JupyterLab in SageMaker Studio



**Try the new JupyterLab in SageMaker Studio**

- Launch notebooks in seconds and start coding instantly
- Use the similar underlying compute and storage as your notebook instances to enable more features at the same cost
- Seamlessly perform comprehensive ML and analytics workflows, all in one notebook
- Leverage GenAI-powered coding assistance from Amazon CodeWhisperer and JupyterAI to accelerate development
- Collaborate with your peers in real-time on the same notebook for seamless ideation

[Get Started](#)

► How to access JupyterLab in Studio?

**Notebook instances** | Git repositories

**Notebook instances** [Info](#)

Search notebook instances

Name	Instance	Creation time	Status	Actions
<a href="#">franklin</a>	ml.t3.medium	10/24/2024, 2:40:30 PM	InService	<a href="#">Open Jupyter</a>   <a href="#">Open JupyterLab</a>

### 4) CREATE A JUPYTER NOTEBOOK

## Create notebook instance

Amazon SageMaker provides pre-built fully managed notebook instances that run Jupyter notebooks. The notebook instances include example code for common model training and hosting exercises. [Learn more](#)

### Notebook instance settings

Notebook instance name

fraud\_detection

Maximum of 63 alphanumeric characters. Can include hyphens (-), but not spaces. Must be unique within your account in an AWS Region.

Notebook instance type

ml.t3.medium

Platform identifier [Learn more](#)

Amazon Linux 2, Jupyter Lab 3

► Additional configuration

### Permissions and encryption

IAM role

Notebook instances require permissions to call other services including SageMaker and S3. Choose a role or let us create a role with the [AmazonSageMakerFullAccess](#) IAM policy attached.

Fraud\_Detection

Create role using the role creation wizard

Root access - optional

- ☒ Enable - Give users root access to the notebook
- ☐ Disable - Don't give users root access to the notebook
- Lifecycle configurations always have root access

Encryption key - optional

Encrypt your notebook data. Choose an existing KMS key or enter a key's ARN.

No Custom Encryption

## Notebook is created

Success! Your notebook instance is being created.

Open the notebook instance when status is InService and open a template notebook to get started.

[View details](#)

Amazon SageMaker > Notebook instances

Notebook instances Info

Search notebook instances

Refresh


Actions

Create notebook instance

Name	Instance	Creation time	Status	Actions
<a href="#">frauddetection</a>	ml.t3.medium	11/7/2024, 12:05:56 PM	Pending	-
<a href="#">franklin</a>	ml.t3.medium	10/24/2024, 2:40:30 PM	InService	<a href="#">Open Jupyter</a>   <a href="#">Open JupyterLab</a>

1. Open Jupyter or JupyterLab according to the interface needed.
2. Go to File menu->Choose New-> Notebook.

### 3. Select Kernel as 'conda\_python3'

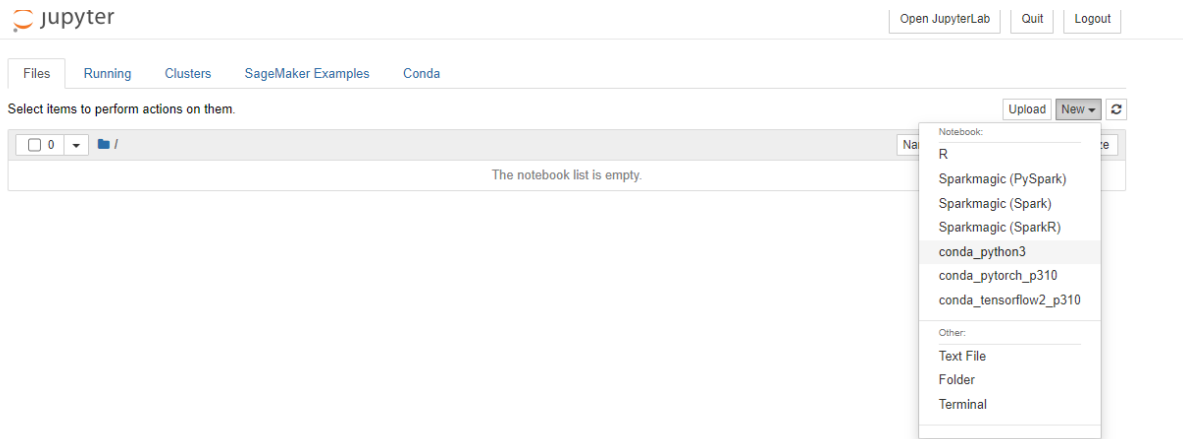

### Deploying the model (Here it is stored in s3 bucket that we had created)

```
In [1]: import shap
X, y = shap.datasets.adult()
X_display, y_display = shap.datasets.adult(display=True)
feature_names = list(X.columns)
feature_names

Matplotlib is building the font cache; this may take a moment.
```

```
Out[1]: ['Age',
'Workclass',
'Education-Num',
'Marital Status',
'Occupation',
'Relationship',
'Race',
'Sex',
'Capital Gain',
'Capital Loss',
'Hours per week',
'Country']
```

```
In [7]: import sagemaker, boto3, os
bucket = sagemaker.Session().default_bucket()
prefix = "demo-sagemaker-xgboost-adult-income-prediction"

boto3.Session().resource('s3').Bucket(bucket).Object(
    os.path.join(prefix, 'data/train.csv')).upload_file('train.csv')
boto3.Session().resource('s3').Bucket(bucket).Object(
    os.path.join(prefix, 'data/validation.csv')).upload_file('validation.csv')

sagemaker.config INFO - Not applying SDK defaults from location: /etc/xdg/sagemaker/config.yaml
sagemaker.config INFO - Not applying SDK defaults from location: /home/ec2-user/.config/sagemaker/config.yaml
```

```
In [8]: import sagemaker

region = sagemaker.Session().boto_region_name
print("AWS Region: {}".format(region))

role = sagemaker.get_execution_role()
print("RoleArn: {}".format(role))

AWS Region: us-east-1
RoleArn: arn:aws:iam::97505009706:role/lucifer007
```

```
! aws s3 cp {rule_output_path} ./ --recursive
```

```
from IPython.display import FileLink, FileLinks
display("Click link below to view the XGBoost Training report", FileLink("CreateXgboostReport/xgboost_report.html"))
```

---

download: s3://sagemaker-us-east-1-975050009706/demo-sagemaker-xgboost-adult-income-prediction/xgboost\_model/sagemaker-xgboost-2024-10-24-09-29-24-130/rule-output/CreateXgboostReport/xgboost-reports/EvaluationMetrics.json to CreateXgboostReport/xgboost-reports/EvaluationMetrics.json  
download: s3://sagemaker-us-east-1-975050009706/demo-sagemaker-xgboost-adult-income-prediction/xgboost\_model/sagemaker-xgboost-2024-10-24-09-29-24-130/rule-output/CreateXgboostReport/xgboost-reports/FeatureImportance.json to CreateXgboostReport/xgboost-reports/FeatureImportance.json  
download: s3://sagemaker-us-east-1-975050009706/demo-sagemaker-xgboost-adult-income-prediction/xgboost\_model/sagemaker-xgboost-2024-10-24-09-29-24-130/rule-output/ProfilerReport/profiler-output/profiler-report.ipynb to ProfilerReport/profiler-output/profiler-report.ipynb  
download: s3://sagemaker-us-east-1-975050009706/demo-sagemaker-xgboost-adult-income-prediction/xgboost\_model/sagemaker-xgboost-2024-10-24-09-29-24-130/rule-output/CreateXgboostReport/xgboost-reports/ConfusionMatrix.json to CreateXgboostReport/xgboost-reports/ConfusionMatrix.json

---

```
from sagemaker.debugger import Rule, ProfilerRule, rule_configs
from sagemaker.session import TrainingInput
```

```
s3_output_location='s3://{}/{}/{}/'.format(bucket, prefix, 'xgboost_model')
```

```
container=sagemaker.image_uris.retrieve("xgboost", region, "1.2-1")
print(container)
```

```
xgb_model=sagemaker.estimator.Estimator(
    image_uri=container,
    role=role,
    instance_count=1,
    instance_type='ml.m4.xlarge',
    volume_size=5,
    output_path=s3_output_location,
    sagemaker_session=sagemaker.Session(),
    rules=[
        Rule.sagemaker(rule_configs.create_xgboost_report()),
        ProfilerRule.sagemaker(rule_configs.ProfilerReport())
    ]
)
```


```
In [18]: xgb_predictor.endpoint_name
```

```
Out[18]: 'sagemaker-xgboost-2024-10-24-09-34-02-816'
```

```
In [19]: import numpy as np
def predict(data, rows=1000):
    split_array = np.array_split(data, int(data.shape[0] / float(rows) + 1))
    predictions = ''
    for array in split_array:
        predictions = ','.join([predictions, xgb_predictor.predict(array).decode('utf-8')])
    return np.fromstring(predictions[1:], sep=',')
```

```
In [20]: import matplotlib.pyplot as plt

predictions=predict(test.to_numpy()[1:,1:])
plt.hist(predictions)
plt.show()
```

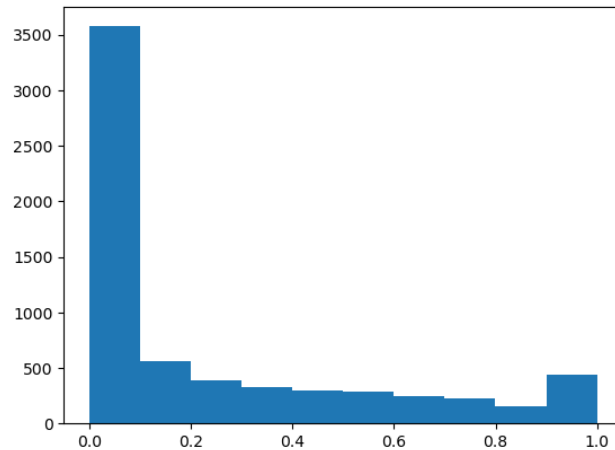

```
In [21]: import sklearn
```

```
cutoff=0.5
print(sklearn.metrics.confusion_matrix(test.iloc[:, 0], np.where(predictions > cutoff, 1, 0)))
print(sklearn.metrics.classification_report(test.iloc[:, 0], np.where(predictions > cutoff, 1, 0)))
```

```
[[4670 356]
 [ 480 1007]]
```

	precision	recall	f1-score	support
0	0.91	0.93	0.92	5026
1	0.74	0.68	0.71	1487
accuracy			0.87	6513
macro avg	0.82	0.80	0.81	6513
weighted avg	0.87	0.87	0.87	6513

# Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDK or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

**Files and folders** (1 Total, 98.2 MB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

Q creditcard X

1 match

< 1 >

<input type="checkbox"/>	Name	Folder
<input type="checkbox"/>	creditcard.csv	-

**Destination** [Info](#)

Destination

[s3://mygroup2](#)

► Destination details

Bucket settings that impact new objects stored in the specified destination.

- Permissions

Grant public access and access to other AWS accounts.
- Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload