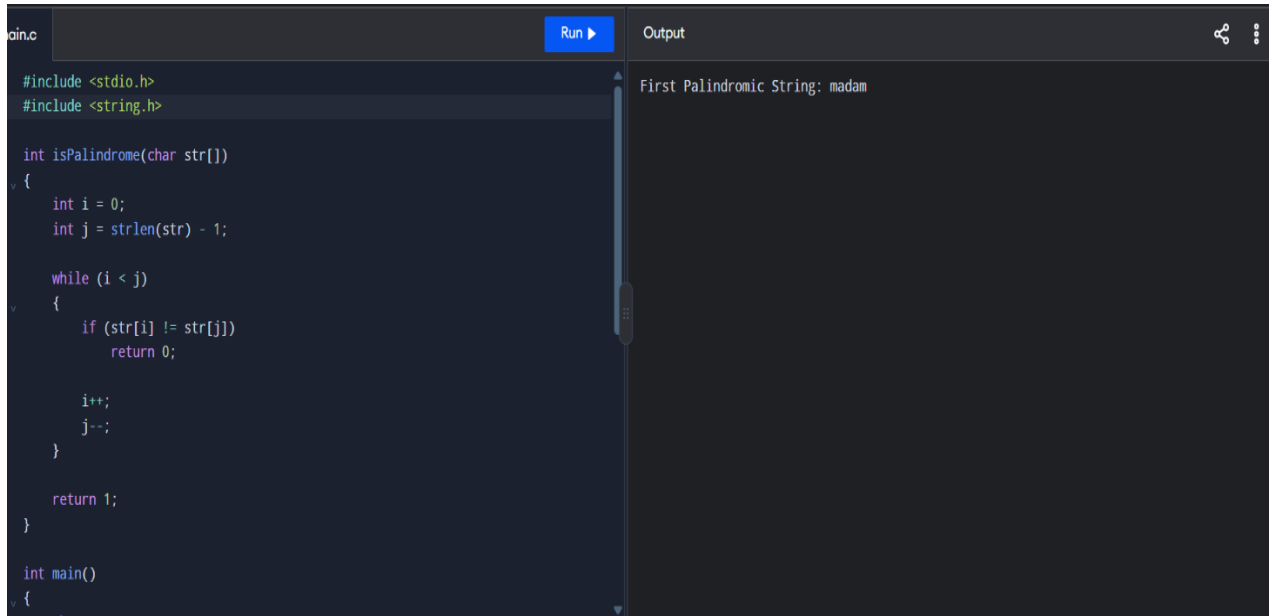


AIM : Bubble Sort with Big-O Analysis

A screenshot of a code editor showing a C program. The code defines a function `isPalindrome` that checks if a string is a palindrome by comparing characters from both ends. It includes headers `<stdio.h>` and `<string.h>`. The `main` function calls `isPalindrome` with the string "madam". The output window shows the result: "First Palindromic String: madam".

```
main.c Run ▶ Output  
#include <stdio.h>  
#include <string.h>  
  
int isPalindrome(char str[])  
{  
    int i = 0;  
    int j = strlen(str) - 1;  
  
    while (i < j)  
    {  
        if (str[i] != str[j])  
            return 0;  
  
        i++;  
        j--;  
    }  
  
    return 1;  
}  
  
int main()  
{  
    char str[] = "madam";  
    if (isPalindrome(str))  
        printf("First Palindromic String: %s", str);  
}
```

RESULT : Bubble Sort with Big-O Analysis has been found successfully