EXPERIMENT 15 PPS

15.1.1//Car dealership sales system

Ans: ALGORITHM:

- **Start**

- **Define Class `Car`**

2.1 Create a constructor `__init__(brand, price, model, color)`
2.2 Initialize instance variables:

  - `brand ← brand`
  - `price ← price`
  - `model ← model`
  - `color ← color`

2.3 Define method `display_details()` with no implementation

- **Define Class `Car1` (inherits from `Car`)**

3.1 Override method `display_details()`
3.2 Print the following:

  - `brand`
  - `price`
  - `model`
  - `color`

- **Define Class `Car2` (inherits from `Car`)**

4.1 Override method `display_details()`
4.2 Print the following:

  - `brand`
  - `price`
  - `model`
  - `color`

- **Create Object of Derived Class**

5.1 Input values for `brand`, `price`, `model`, `color`
5.2 Create object:

  - `obj ← Car1(brand, price, model, color)`
    (or Car2)

- **Call Method**

6.1 Execute `obj.display_details()`

- **Display Output**

  - Show:
    - Brand
    - Price
    - Model
    - Color

- **Stop**

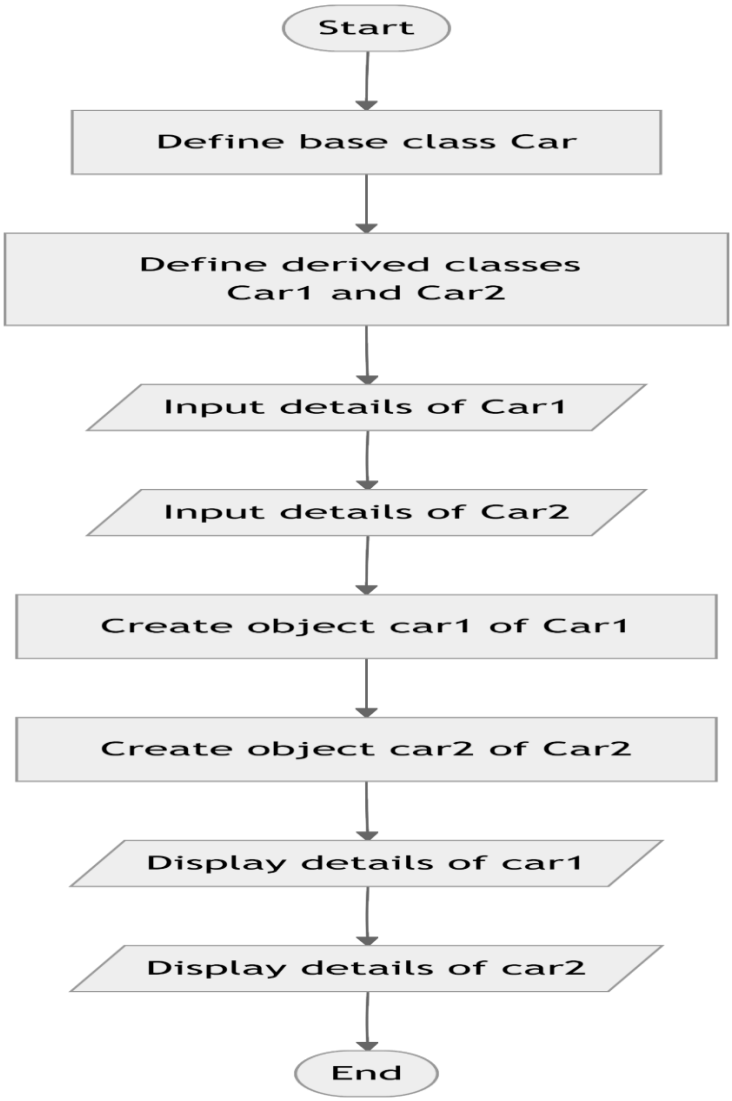

FLOWCHART:
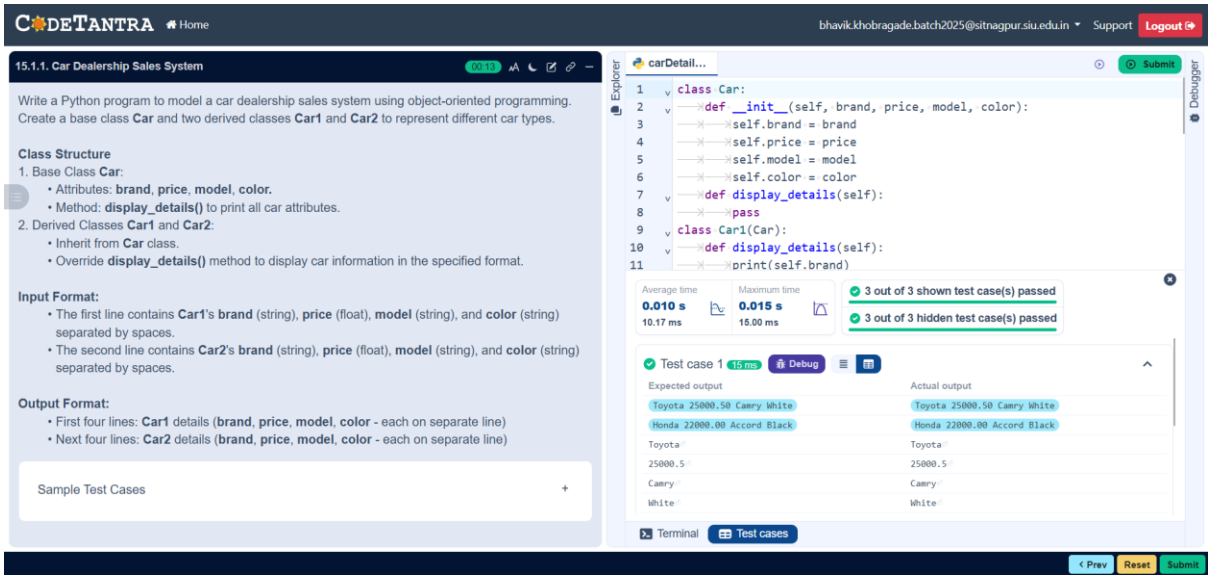
CODETANTRA: