EXPERIMENT 15 PPS

15.1.1//Car dealership sales system

Ans: ALGORITHM:

Step 1: Start

Step 2: Define a base class Car

- Declare attributes: brand, price, model, color

Step 3: Define constructor __init__()

- Initialize all attributes using input values

Step 4: Define method display_details()

- Print brand, price, model, and color (each on separate line)

Step 5: Define derived class Car1

- Inherit from class Car
- Override method display_details() to print details

Step 6: Define derived class Car2

- Inherit from class Car
- Override method display_details() to print details

Step 7: Read input for first car

- Store values: brand1, price1, model1, color1

Step 8: Read input for second car

- Store values: brand2, price2, model2, color2

Step 9: Create object car1 of class Car1

- Pass first car details

Step 10: Create object car2 of class Car2

- Pass second car details

Step 11: Call display_details() for car1

- Print first car details

Step 12: Call display_details() for car2

- Print second car details

Step 13: Stop

Flowchart :

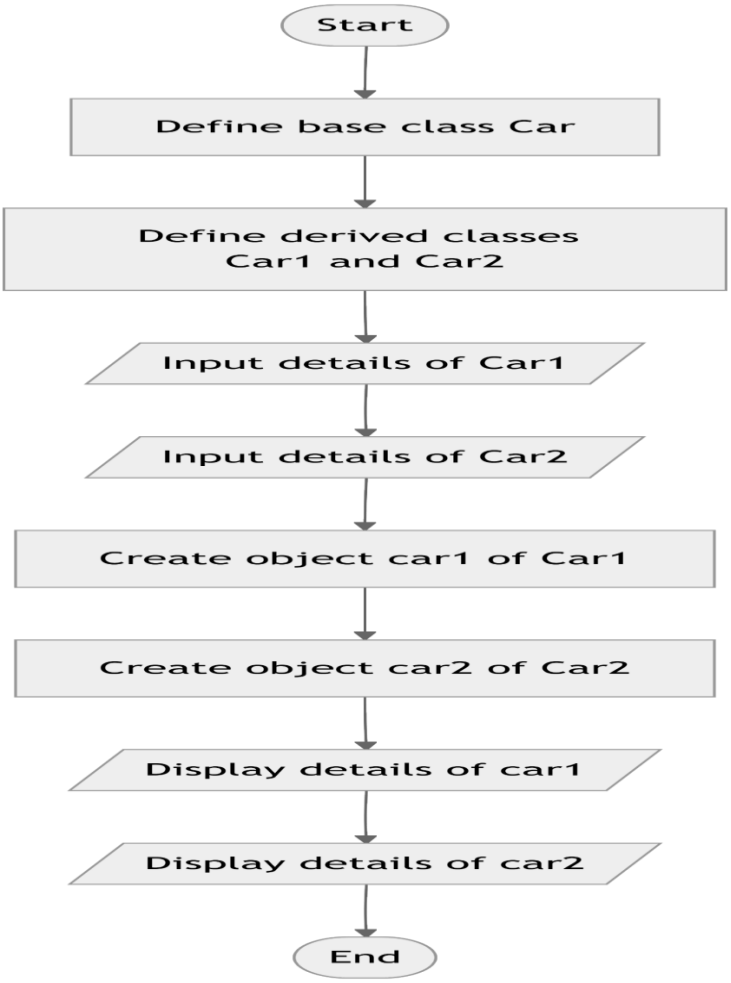
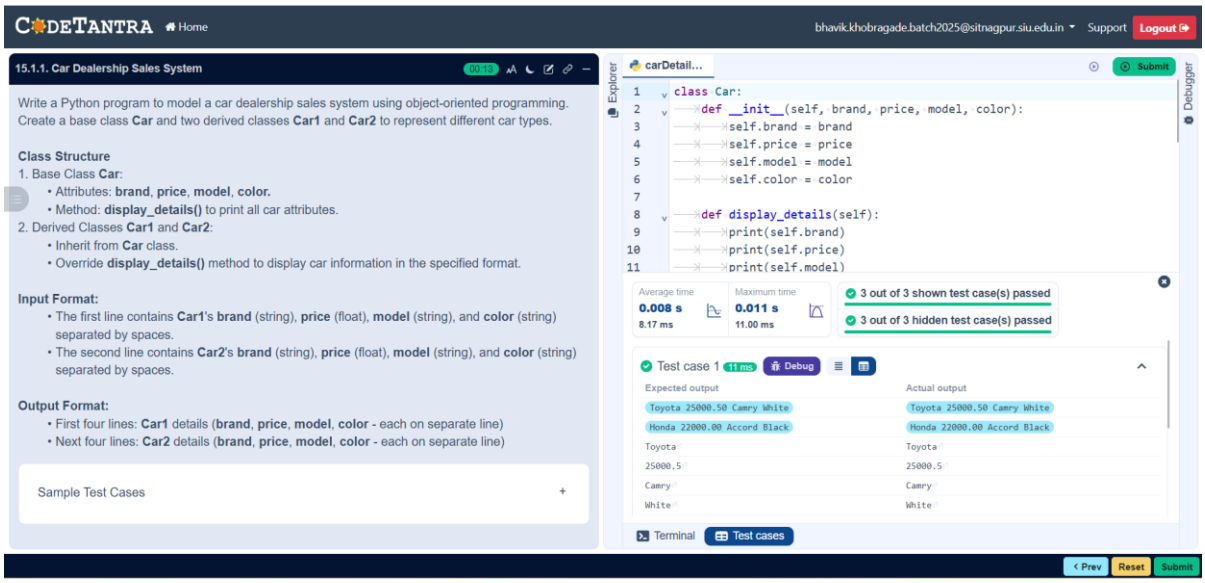
CODETANTRA: