

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

Aim: To learn the Basics of Machine Learning

IDE: Google Colab

Theory:

Machine learning is a subset of artificial intelligence in the field of computer science that often uses statistical techniques to give computers the ability to "learn" (i.e., progressively improve performance on a specific task) with data, without being explicitly programmed. In the past decade, machine learning has given us self-driving cars, practical speech recognition, effective web search, and a vastly improved understanding of the human genome.

Machine learning tasks

Machine learning tasks are typically classified into two broad categories, depending on whether there is a learning "signal" or "feedback" available to a learning system:

- **Supervised learning:** The computer is presented with example inputs and their desired outputs, given by a "teacher", and the goal is to learn a general rule that maps inputs to outputs. As special cases, the input signal can be only partially available, or restricted to special feedback:
- **Semi-supervised learning:** the computer is given only an incomplete training signal: a training set with some (often many) of the target outputs missing.
- **Active learning:** the computer can only obtain training labels for a limited set of instances (based on a budget), and also has to optimize its choice of objects to acquire labels for. When used interactively, these can be presented to the user for labeling.
- **Reinforcement learning:** training data (in form of rewards and punishments) is given only as feedback to the program's actions in a dynamic environment, such as driving a vehicle or playing a game against an opponent.
- **Unsupervised learning:** No labels are given to the learning algorithm, leaving it on its own to find structure in its input. Unsupervised learning can be a goal in itself (discovering hidden patterns in data) or a means towards an end (feature learning).

Machine learning applications

In classification, inputs are divided into two or more classes, and the learner must produce a model that assigns unseen inputs to one or more (multi-label classification) of these classes. This is typically tackled in a supervised manner. Spam filtering is an example of classification, where the inputs are email (or other) messages and the classes are "spam" and "not spam". In regression, also a supervised problem, the outputs are continuous rather than discrete.

In clustering, a set of inputs is to be divided into groups. Unlike in classification, the groups are not known beforehand, making this typically an unsupervised task. Density estimation finds the distribution of inputs in

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

some space. Dimensionality reduction simplifies inputs by mapping them into a lower- dimensional space. Topic modeling is a related problem, where a program is given a list of human language documents and is tasked with finding out which documents cover similar topics.

Machine learning Approaches

Decision tree learning: Decision tree learning uses a decision tree as a predictive model, which maps observations about an item to conclusions about the item's target value. Association rule learning Association rule learning is a method for discovering interesting relations between variables in large databases.

Artificial neural networks

An artificial neural network (ANN) learning algorithm, usually called "neural network" (NN), is a learning algorithm that is vaguely inspired by biological neural networks. Computations are structured in terms of an interconnected group of artificial neurons, processing information using a connectionist approach to computation. Modern neural networks are non-linear statistical data modeling tools. They are usually used to model complex relationships between inputs and outputs, to find patterns in data, or to capture the statistical structure in an unknown joint probability distribution between observed variables.

Deep learning

Falling hardware prices and the development of GPUs for personal use in the last few years have contributed to the development of the concept of deep learning which consists of multiple hidden layers in an artificial neural network. This approach tries to model the way the human brain processes light and sound into vision and hearing. Some successful applications of deep learning are computer vision and speech recognition.

Inductive logic programming

Inductive logic programming (ILP) is an approach to rule learning using logic programming as a uniform representation for input examples, background knowledge, and hypotheses. Given an encoding of the known background knowledge and a set of examples represented as a logical database of facts, an ILP system will derive a hypothesized logic program that entails all positive and no negative examples. Inductive programming is a related field that considers any kind of programming languages for representing hypotheses (and not only logic programming), such as functional programs.

Support vector machines

Support vector machines (SVMs) are a set of related supervised learning methods used for classification and regression. Given a set of training examples, each marked as belonging to one of two categories, an SVM training algorithm builds a model that predicts whether a new example falls into one category or the other.

Clustering

Cluster analysis is the assignment of a set of observations into subsets (called clusters) so that observations within the same cluster are similar according to some pre designated criterion or criteria, while observations drawn from different clusters are dissimilar. Different clustering techniques make different assumptions on the

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

structure of the data, often defined by some similarity metric and evaluated for example by internal compactness (similarity between members of the same cluster) and separation between different clusters. Other methods are based on estimated density and graph connectivity. Clustering is a method of unsupervised learning, and a common technique for statistical data analysis.

Bayesian networks

A Bayesian network, belief network or directed acyclic graphical model is a probabilistic graphical model that represents a set of random variables and their conditional independencies via a directed acyclic graph (DAG). For example, a Bayesian network could represent the probabilistic relationships between diseases and symptoms. Given symptoms, the network can be used to compute the probabilities of the presence of various diseases. Efficient algorithms exist that perform inference and learning.

Reinforcement learning

Reinforcement learning is concerned with how an agent ought to take actions in an environment so as to maximize some notion of long-term reward. Reinforcement learning algorithms attempt to find a policy that maps states of the world to the actions the agent ought to take in those states. Reinforcement learning differs from the supervised learning problem in that correct input/output pairs are never presented, nor sub-optimal actions explicitly corrected.

Similarity and metric learning

In this problem, the learning machine is given pairs of examples that are considered similar and pairs of less similar objects. It then needs to learn a similarity function (or a distance metric function) that can predict if new objects are similar. It is sometimes used in Recommendation systems.

Genetic algorithms

A genetic algorithm (GA) is a search heuristic that mimics the process of natural selection, and uses methods such as mutation and crossover to generate new genotype in the hope of finding good solutions to a given problem. In machine learning, genetic algorithms found some uses in the 1980s and 1990s. Conversely, machine learning techniques have been used to improve the performance of genetic and evolutionary algorithms.

Rule-based machine learning

Rule-based machine learning is a general term for any machine learning method that identifies, learns, or evolves "rules" to store, manipulate or apply, knowledge. The defining characteristic of a rule-based machine learner is the identification and utilization of a set of relational rules that collectively represent the knowledge captured by the system. This is in contrast to other machine learners that commonly identify a singular model that can be universally applied to any instance in order to make a prediction. Rule-based machine learning approaches include learning classifier systems, association rule learning, and artificial immune systems.

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

Feature selection approach

Feature selection is the process of selecting an optimal subset of relevant features for use in model construction. It is assumed the data contains some features that are either redundant or irrelevant, and can thus be removed to reduce calculation cost without incurring much loss of information. Common optimality criteria include accuracy, similarity and information measures.

Pre Lab Exercise:

- a. Write 5 applications, that you encounter daily, where Machine Learning is used?
 - Google Search Engine** – provides relevant search results
 - YouTube/Netflix Recommendations** – suggests videos/movies
 - Email Spam Filtering** – detects spam emails
 - Voice Assistants (Alexa/Siri)** – speech recognition
 - Google Maps** – traffic prediction & route optimization
- b. What do you mean by Supervised Learning?

Supervised learning is a type of machine learning where the model is trained using **labeled data (input + output)** and learns to map inputs to correct outputs.
- c. What do you mean by Unsupervised Learning?

Unsupervised learning is a type of machine learning where **no labeled data is given**, and the model finds hidden patterns or structures in the data.
- d. What do you mean by Reinforcement Learning?

Reinforcement learning is a method where an agent learns by **trial and error using rewards and punishments** to maximize long-term performance.

Program (Code):

Perform the following tasks:

1. Load a dataset in your IDE
2. Observe the statistics of all the features
3. Obtain the shape of the dataset
4. Separate all the features
5. Fill the missing values, if any, using the statistically relevant value
6. Observe the Box-Plot of each feature
7. Comment on the IQR range and outliers

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

CODE:

```
# 1. LOAD DATASET
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
# Load dataset
df = pd.read_csv("/content/pickup_points_random_students.csv")
print("\n First 5 Rows ")
print(df.head())

# 2. STATISTICS
print("\nStatistical Summary (Numerical)")
print(df.describe())
print("\nStatistical Summary (Categorical)")
print(df.describe(include='object'))

# 3. SHAPE
print("\nDataset Shape")
print("Rows, Columns:", df.shape)

# 4. SEPARATE FEATURES
# Replace 'target_column' with actual column name if exists
try:
    X = df.drop('target_column', axis=1)
    y = df['target_column']
    print("\nTarget column separated successfully.")
except:
    X = df.copy()
    print("\nNo target column specified, using full dataset as features.")
print("\nFeatures Preview")
print(X.head())

# 5. HANDLE MISSING VALUES
print("\n Missing Values Before")
print(df.isnull().sum())
# Fill numeric columns with mean
for col in df.select_dtypes(include=['int64', 'float64']):
    df[col].fillna(df[col].mean(), inplace=True)
# Fill categorical columns with mode
for col in df.select_dtypes(include=['object']):
    df[col].fillna(df[col].mode()[0], inplace=True)
print("\nMissing Values After")
print(df.isnull().sum())
```

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

6. BOXPLOT

```
print("\nGenerating Boxplots")
for col in df.select_dtypes(include=['int64', 'float64']):
    plt.figure()
    sns.boxplot(x=df[col])
    plt.title(f"Boxplot of {col}")
    plt.show()
```

7. IQR & OUTLIERS

```
print("\nIQR and Outlier Analysis ")
for col in df.select_dtypes(include=['int64', 'float64']):
    Q1 = df[col].quantile(0.25)
    Q3 = df[col].quantile(0.75)
    IQR = Q3 - Q1
    lower = Q1 - 1.5 * IQR
    upper = Q3 + 1.5 * IQR
    outliers = df[(df[col] < lower) | (df[col] > upper)]
    print(f"\nFeature: {col}")
    print(f"IQR: {IQR}")
    print(f"Lower Bound: {lower}")
    print(f"Upper Bound: {upper}")
    print(f"Number of Outliers: {len(outliers)}")
```

Results:

```
First 5 Rows
pickup_id    pickup_name  total_students
0           1      Ahir Chowk             8
1           2  Airport Fatak             9
2           3      Aji Dam                9
3           4    Alap Avenue              6
4           5  Alap Green City            1

Statistical Summary (Numerical)
pickup_id    total_students
count    20.00000    20.000000
mean     10.50000     6.050000
std       5.91608     2.855742
min       1.00000     1.000000
25%       5.75000     3.750000
50%      10.50000     6.500000
75%      15.25000     8.250000
max      20.00000    10.000000

Statistical Summary (Categorical)
pickup_name
count      20
unique     20
top      Ahir Chowk
freq         1

Dataset Shape
Rows, columns: (20, 3)

No target column specified, using full dataset as features.

Features Preview
pickup_id    pickup_name  total_students
0           1      Ahir Chowk             8
1           2  Airport Fatak             9
2           3      Aji Dam                9
3           4    Alap Avenue              6
4           5  Alap Green City            1
```

```
Missing Values Before
pickup_id      0
pickup_name    0
total_students 0
dtype: int64

Missing Values After
pickup_id      0
pickup_name    0
total_students 0
dtype: int64
```



Marwadi
University

Marwadi University
Faculty of Technology
Department of Information and Communication Technology

**Subject: Artificial
Intelligence (01CT0616)**

Aim: To learn the Basics of Machine Learning


Experiment No: 01

Date:


Enrollment No:92301733043

```
df[col].fillna(df[col].mode()[0], inplace=True)
```

Boxplot of pickup_id

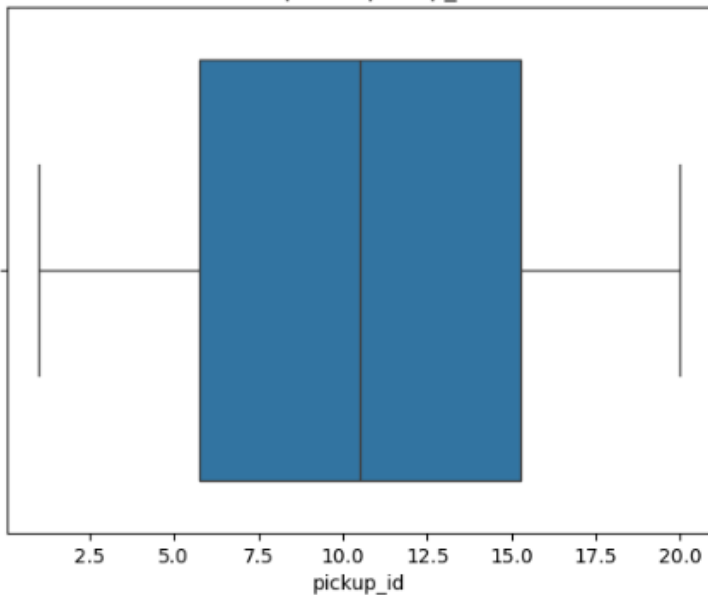

Boxplot of total_students

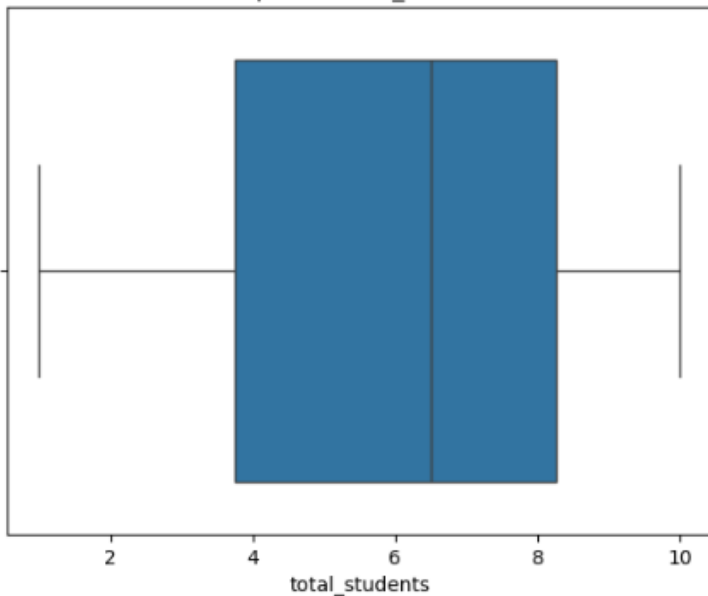

--- IQR and Outlier Analysis ---

Feature: pickup_id

IQR: 9.5

Lower Bound: -8.5

Upper Bound: 29.5

Number of Outliers: 0

Feature: total_students

IQR: 4.5

Lower Bound: -3.0

Upper Bound: 15.0

Number of Outliers: 0

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date:	Enrollment No:92301733043

Observation and Result Analysis:

a. Statistics of Dataset

Mean, median, std deviation observed

Helps understand data distribution

Min and max show range of values

b. IQR and Outliers

$IQR = Q3 - Q1$

Values outside:

Lower bound: $Q1 - 1.5 \times IQR$

Upper bound: $Q3 + 1.5 \times IQR$

Points outside this range are **outliers**

Post Lab Exercise:

- a. Which is a better mean of replacing the missing value-mean, median or mode?

Median → Best (for skewed data & outliers)

Mean → For normal distribution

Mode → For categorical data

- b. How IQR range helps to understand the nature of the distribution of the data?

Shows **spread of middle 50% data**

Detects **outliers**

Helps identify **skewness and variability**

- c. Which are the ways to replace the categorical data to the numerical ones?

Label Encoding

One-Hot Encoding

Ordinal Encoding

Binary Encoding