

PRODUCT MANAGEMENT SYSTEM

A Project Report

Submitted in partial fulfillment of the
Requirements for the award of the Degree of

BACHELOR OF SCIENCE (INFORMATION TECHNOLOGY)

By

Bhavishay Mankani

17074

Under the esteemed guidance of

Mr. Manish Karale

I.T. Coordinator



DEPARTMENT OF INFORMATION TECHNOLOGY

R. D. NATIONAL & W. A. SCIENCE COLLEGE

(Affiliated to University of Mumbai)

MUMBAI, 400050

MAHARASHTRA

2020

R. D. NATIONAL & W. A. SCIENCE COLLEGE

(Affiliated to University of Mumbai)

MUMBAI – MAHARASHTRA - 400050

DEPARTMENT OF INFORMATION TECHNOLOGY



CERTIFICATE

This is to certify that the project entitled, **“PRODUCT MANAGEMENT SYSTEM”**, is bonafied work of Bhavishay Mankani bearing Seat. No: **(17074)** submitted in partial fulfillment of the requirements for the award of degree of BACHELOR OF SCIENCE in INFORMATION TECHNOLOGY from University of Mumbai.

Internal Guide

Coordinator

External Examiner

Date: _____

College Seal

ACKNOWLEDGEMENT

We take this opportunity to express our gratitude to the department of BSc.IT for nurturing and teaching us the nuances required for developing this project. Our head of Department Mr. Dinesh Himatsinghani has been very helpful for making all facilities available to us. He always had a watchful eye on our progress throughout the project.

We are immensely thankful to our professor Mr. Manish Karale for his valuable and time inputs.

Once again we are grateful to our guide Mrs. Manisha Suthar without whom this project would be impossible. She was not only our guide but our source of inspiration. She was always available and patient with us in our times of need and we owe her our greatest appreciation.

We consider ourselves fortunate to have got an opportunity of working for Product Management System. Her vast details in the concerned field allowed us to incorporate the minute details of the subject in our project. She made us feel comfortable at all times with her kind words and encouragement. We would like to thank her dedicating some of his time from her schedule, to help us in our project with a stoical attitude.

Last but not the least our heartfelt gratitude to the Staff Members both at R.D. National College and Product Management System. for their corporation and support.

This project was a great learning and humbling experience and reflects our academic work at National College. We are sure that this experience will hold us good stead when we begin our professional careers.

Chapter 1

Introduction

- **Background**

The purpose of this project is to provide and design a web-based application that allows the Accountant / Data Entriest to generate an purchase order (PO) with requirements like (items, quantity, services , agreed discount, types, etc.) on bases of equipments demanded by the particular firm

- **Objectives**

The college's product management system is to enhance and upgrade the existing system by increasing the efficiency and effectiveness. The software improves the working methods by replacing the existing manual system with the computer-based system. The system provides the uses a quick response with very accurate information.

- **Purpose and Scope**

1.3.1 Purpose

The purpose of this project is to provide and design a web-based application that allows the HOD / Accountant to streamline their purchase order entry tasks and manage their payment info in a more effective and efficient way. The system will ensure effective utilization service machine, generate and maintain Service records, and allow proper interaction and timely access to accurate information to those who require the information.

1.3.2 Scope

The proposed system seems to be better and efficient in terms of technology and integration point of view. The proposed paper shows the flow, structure and working of the product management system(PMS). PMS is user friendly i.e. easy to use. Thus, it is a time saving as well as cost efficient application.

- **Applicability**

Applicability deals with the functionality of the proposed web application.

The product management system is to enhance and upgrade the existing system by increasing its efficiency and effectiveness. The software improves the working methods by replacing the existing manual system with the computer-based system. The system provides the uses a quick response with very accurate information. In previous system we were facing manual inserting data with no data pulled from the database . This problem is solve by the providing better data getting dropped down from the database by automatically filling and generating a purchase order (PO) number, total cost after SGST and CGST and agreed discounts in the product management system of the college.

- **Achievements**

The system is designed to provide features of all purchase order and invoicing entries. Services provided by the service centres, locations of all the service centre in the vicinity etc. [2]. The above proposed model is easy to implement considering the available technology infrastructure. The models is simple, secure and scalable. The proposed model is based on serial communication. But for future scope in enlarging the system we can use connectionless system. We can even start online for registration and information based website. The initial model of the web application was not supported by the client and eventually development of new model had to be made catering the features listed and mentioned. With rigorous process such as managing and coordinating with client on daily basis and also unscheduled changes in the project, I learned to manage and document my work and also improve my PHP skills to develop the web application and made it more user friendly.

- **Organisation of Report**

The project is developed for established college in the city named as "**R.D. & S.H. National college and S.W.A science college**". To manage all operations of the purchases made this project is being developed. The main objective of the Web page is to automate the existing system of manually maintained records of the Purchase Order and Invoicing made by the HOD / Accountant to maintain the monetary positions and other related transactions made by the department. Providing domain specific user authenticated on the web page. This application can be used by any other college or firm to automate the process of manually maintaining the records related to the subject of maintaining the stock and liquid flows. The main purpose of the web application is to provide a way to the user to store the data digitally and giving access to the data based on their roles in the The web application will be user friendly meaning easily operable by anyone. It will also keep the record of the departments. The records of the stocks or and other equipments required that will be kept securely and user authentication is required to view a specific type of data.

Chapter 2

Survey of Technologies

- **PHP**

PHP: (recursive acronym for PHP: Hypertext Preprocessor) is a widely-used open source general-purpose scripting language that is especially suited for web development and can be embedded into HTML. Hypertext Preprocessor (or simply PHP) is a server-side scripting language designed for Web development, but also used as a general-purpose programming language. PHP originally stood for *Personal Home Page*, but it now stands for the recursive acronym *PHP: Hypertext Preprocessor*. PHP is free software released under the PHP License, which stipulates that:

The best things in using PHP are that it is extremely simple for a newcomer, but offers many advanced features for a professional programmer. Don't be afraid reading the long list of PHP's features. You can jump in, in a short time, and start writing simple scripts in a few hours. Although PHP's development is focused on server-side scripting, you can do much more with it.

The client would receive the results of running that script, but would not know what the underlying code was. You can even configure your web server to process all your HTML files with PHP, and then there's really no way that users can tell what you have up your sleeve.

What is a PHP File?

- PHP files can contain text, HTML, CSS, JavaScript, and PHP code
- PHP code are executed on the server, and the result is returned to the browser as plain HTML
- PHP files have extension ".php"

What Can PHP Do?

- PHP can generate dynamic page content
- PHP can create, open, read, write, delete, and close files on the server
- PHP can collect form data
- PHP can send and receive cookies
- PHP can add, delete, modify data in your database
- PHP can be used to control user-access
- PHP can encrypt data

Why PHP?

- PHP runs on various platforms (Windows, Linux, Unix, Mac OS X, etc.)
 - PHP is compatible with almost all servers used today (Apache, IIS, etc.)
 - PHP supports a wide range of databases
 - PHP is free. Download it from the official PHP resource: www.php.net
 - PHP is easy to learn and runs efficiently on the server side
- **MY SQL**

MySQL is the most popular Open Source Relational SQL Database Management System. MySQL is one of the best RDBMS being used for developing various web-based software applications. MySQL is developed, marketed and supported by MySQL AB, which is a Swedish company.

What is a Database?

A database is a separate application that stores a collection of data. Each database has one or more distinct APIs for creating, accessing, managing, searching and replicating the data it holds.

Other kinds of data stores can also be used, such as files on the file system or large hash tables in memory but data fetching and writing would not be so fast and easy with those types of systems.

Nowadays, we use relational database management systems (RDBMS) to store and manage huge volume of data. This is called relational database because all the data is stored into different tables and relations are established using primary keys or other keys known as **Foreign Keys**.

A Relational Database Management System (RDBMS) is a software that —

- Enables you to implement a database with tables, columns and indexes.

- Guarantees the Referential Integrity between rows of various tables.
- Updates the indexes automatically.
- Interprets an SQL query and combines information from various tables.

MySQL Database

MySQL is a fast, easy-to-use RDBMS being used for many small and big businesses. MySQL is developed, marketed and supported by MySQL AB, which is a Swedish company. MySQL is becoming so popular because of many good reasons –

- MySQL is released under an open-source license. So you have nothing to pay to use it.
- MySQL is a very powerful program in its own right. It handles a large subset of the functionality of the most expensive and powerful database packages.
- MySQL uses a standard form of the well-known SQL data language.
- MySQL works on many operating systems and with many languages including PHP, PERL, C, C++, JAVA, etc.
- MySQL works very quickly and works well even with large data sets.
- MySQL is very friendly to PHP, the most appreciated language for web development.
- MySQL supports large databases, up to 50 million rows or more in a table. The default file size limit for a table is 4GB, but you can increase this (if your operating system can handle it) to a theoretical limit of 8 million terabytes (TB).
- MySQL is customizable. The open-source GPL license allows programmers to modify the MySQL software to fit their own specific environments.

Advantages Of Using MySQL

- **It's Easy To Use**
MySQL is very easy to install, and thanks to a bevy of third-party tools that can be added to the database, setting up an implementation is a relatively simple task. In addition, it's also an easy database to work with. So long as you understand the language, you shouldn't run into too many problems.
- **Support Is Readily Available Whenever Necessary**

Although Oracle's history of supporting its customers can be spotty at best, the nature of MySQL – which got its start as an open-source platform – means that there's a large and thriving community of developers and enthusiasts to which one can turn for help. This is due in large part to the popularity of the solution, the end result of which is no shortage of experts.

- **It's Open-Source**

Oracle's purchase of Sun Microsystems (and by association, MySQL) was met with some contention from the development community. The general fear was that Oracle would transform the tool into a closed, proprietary ecosystem. Thankfully, though Oracle has tightened its grip on MySQL somewhat, it can still be considered an open-source database option, as the code is still available for free online.

- **It's Incredibly Inexpensive**

Depending on what you plan to use it for, a MySQL implementation could range in price from free to \$10,000 or more. Either way, it's significantly less expensive than most other database options on the market (save for MySQL's open-source competitors).

- **It's An Industry Standard (And Still Extremely Popular)**

Although MySQL's popularity has waned somewhat in recent years, it remains one of the most-used database systems in the world. It's compatible with virtually every operating system, and is more or less an industry standard. This is, of course, in spite of all the folks who say it's on the way out.


Chapter 3

Requirements and Analysis

- **System Requirements**

Software Specification:

Software : XAMPP
Operating System : Windows 7 or Higher
Browser/Interpreter : Google Chrome, etc with Flash Compatibility

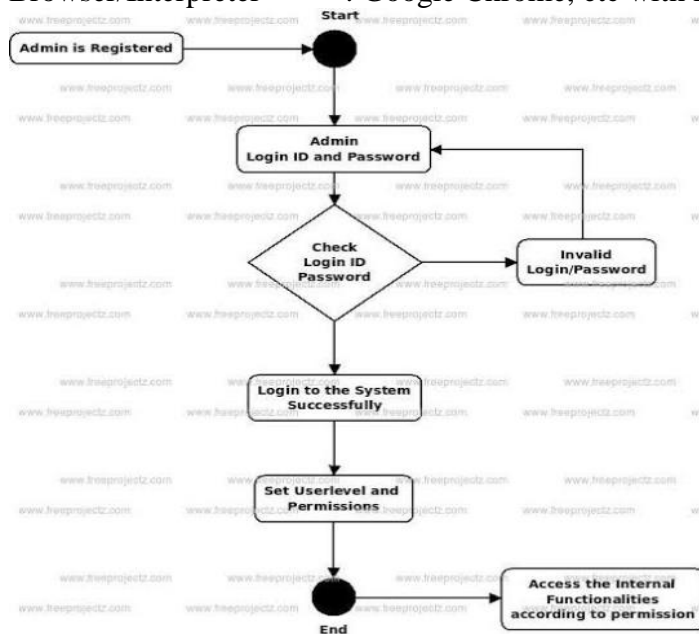

Front End : HTML5, CSS3, Javascript, Bootstrap framework.
Back End : MySQL
Connectivity : Internet
Server : Apache

Hardware Specification:

Processor : Intel Core Duo 2.0 GHz or higher
RAM : Minimum 1GB or higher
Hard Disk : 20GB or higher

3.2 Requirement Specification

The web application will have 4 types of users

- HOD / Data Entriest
- Accountant

These users will have different authentication and different web panel to use according to their role in the service center.

- Provides the searching factors based on various factors, such as purchase order made, pending amount to be paid, view all purchase order(PO). which in the existing system was a difficult task.
- Editing, adding and updating of Records is improved which results in proper resource management of college data.
- All users which were allowed to use it can have access to their data and modify/read them in real time simultaneously.
- A stable Internet connection is needed to access those data via web browser which the store is well equipped with.

Chapter 4

System Design


4.1 Basic Modules

The Basic Module of this project is to create all Purchase Order (PO) entries and store the data in the database and generate a purchase order with its requirements and sent it to its supplier when printed. All these processes are done in a web-based application.


4.2 Data Design

4.2.1 Schema Design


Flow Chart Diagram:

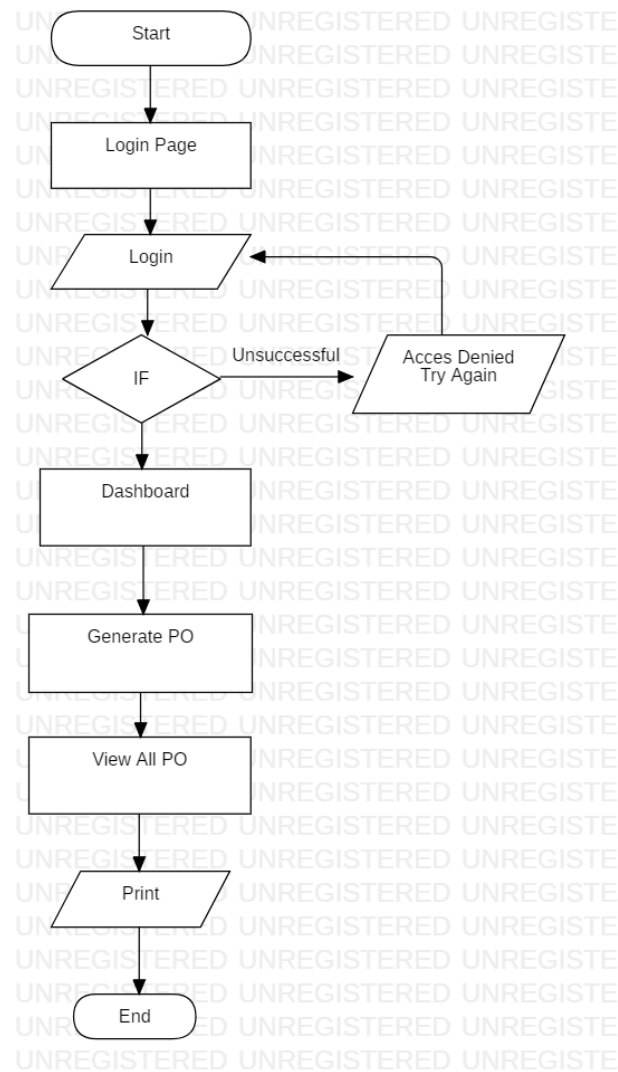

Use Case Diagram:

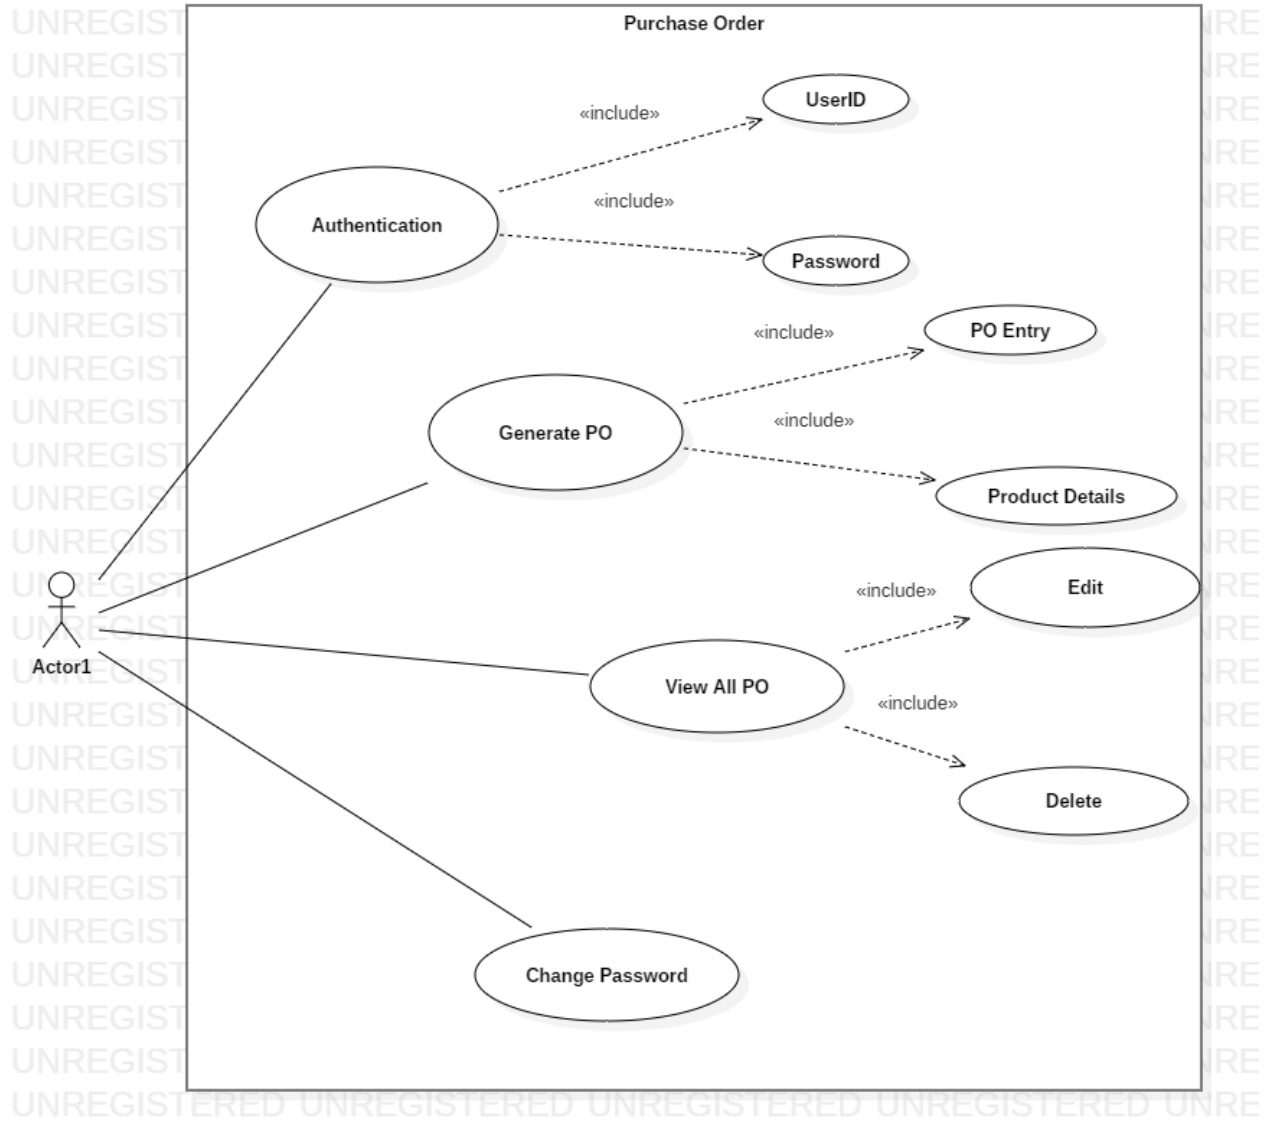

Activity Diagram:

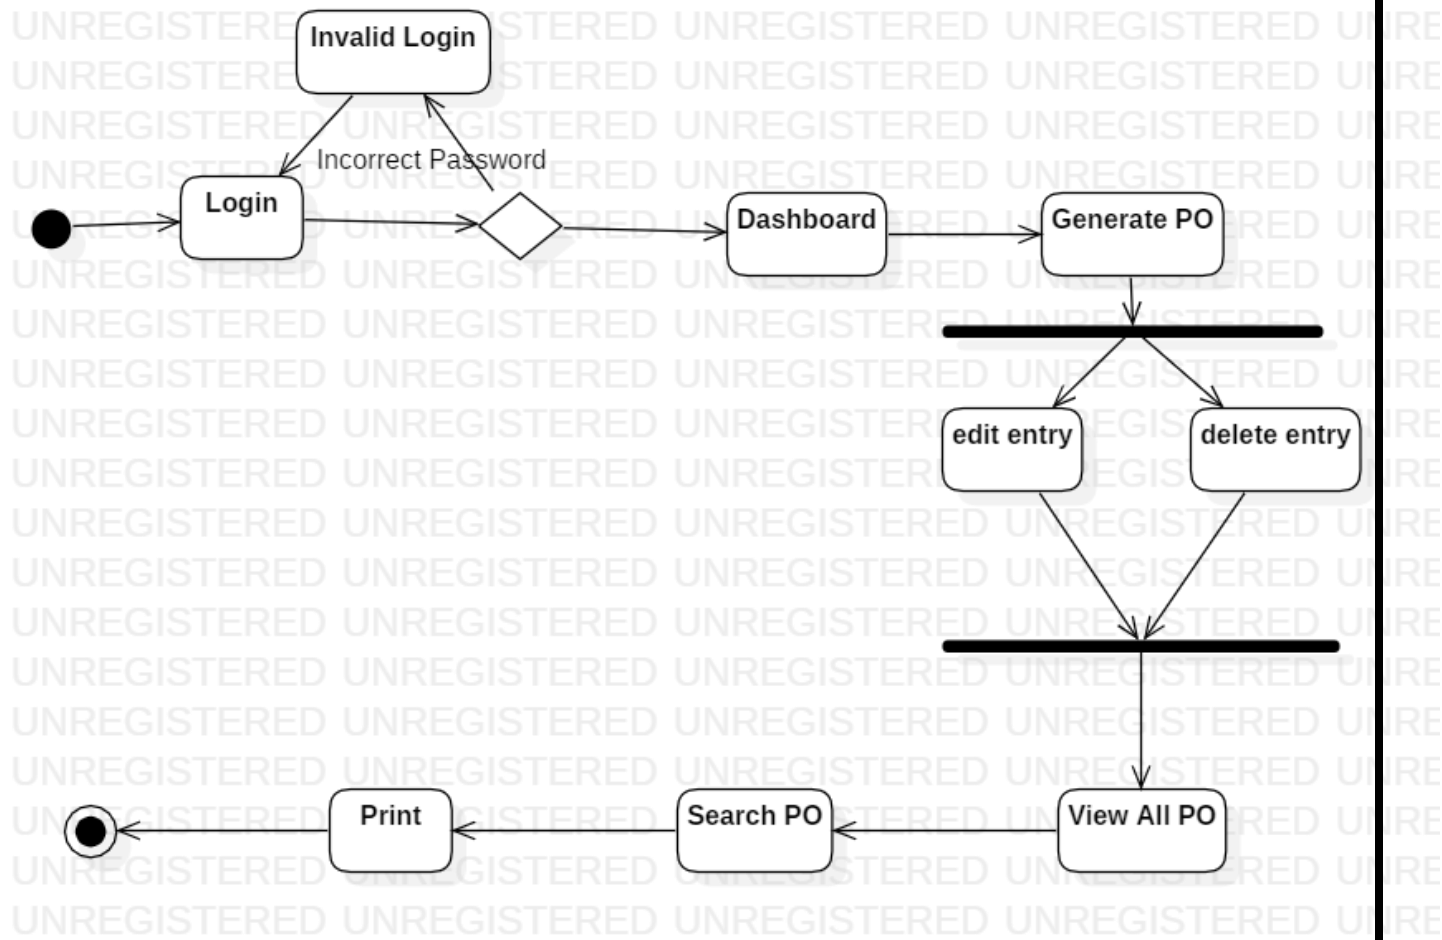

Chapter 5

FEASIBILITY STUDY:

Feasibility study is conducted once the problem is clearly understood. Feasibility study is a high level capsule version of the entire system analysis and design process. The objective is to determine quickly at a minimum expense how to solve a problem. The purpose of feasibility is not to solve the problem but to determine if the problem is worth solving.

The system has been tested for feasibility in the following points.

1. Technical Feasibility
2. Economical Feasibility
3. Operational Feasibility.

1. Technical Feasibility

The project entitles "Courier Service System" is technically feasibility because of the below mentioned feature. The project was developed in Java which Graphical User Interface.

It provides the high level of reliability, availability and compatibility. All these make Java an appropriate language for this project. Thus the existing software Java is a powerful language.

2. Economic Feasibility

The computerized system will help in automate the selection leading the profits and details of the organization. With this software, the machine and manpower utilization are expected to go up by 80-90% approximately. The costs incurred of not creating the system are set to be great, because precious time can be wanted by manually.

3. Operational Feasibility

In this project, the management will know the details of each project where he may be presented and the data will be maintained as decentralized and if any inquires for that particular contract can be known as per their requirements and necessities.

Implementation:

Implementation is the stage where the theoretical design is turned into a working system. The most crucial stage in achieving a new successful system and in giving confidence on the new system for the users that it will work efficiently and effectively.

The system can be implemented only after thorough testing is done and if it is found to work according to the specification.

It involves careful planning, investigation of the current system and its constraints on implementation, design of methods to achieve the change over and an evaluation of change over methods a part from planning. Two major tasks of preparing the implementation are education and training of the users and testing of the system.

The more complex the system being implemented, the more involved will be the systems analysis and design effort required just for implementation.

The implementation phase comprises of several activities. The required hardware and software acquisition is carried out. The system may require some software to be developed. For this, programs are written and tested. The user then changes over to his new fully tested system and the old system is discontinued.

Index.php

```
<?php
session_start();
include('connect.php');

if(isset($_POST['submit'])) {
    $user_name=$_POST['uname'];
    $password=$_POST['pword'];
    $query=mysqli_query($conn,"select * from user where username='$user_name'and
password='$password'") or die("unable to connect".mysqli_error());
    $row=mysqli_fetch_array($query);
    if ($row['username']==$user_name && $row['password']==$password) {
        if ($row['user_type']=="accountant") {
            $_SESSION['username']=$user_name;
            header('location:account-dashboard.php');
        } else {
            $_SESSION['username']=$user_name;
            header('location:dashboard.php');
        }
    } else {
        $open_dashboard="wromg username or password";
        echo $open_dashboard;
    }
}

?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta name="description" content="">
    <meta name="author" content="Dashboard">
    <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">
    <title>RDNC Service Portal - Purchase</title>

    <!-- Favicons -->
    <link href="img/logo.png" rel="icon">
    <link href="img/logo.png" rel="touch-icon">

    <!-- Bootstrap core CSS -->
    <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <!--external css-->
    <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
    <!-- Custom styles for this template -->
    <link href="css/style.css" rel="stylesheet">
    <link href="css/style-responsive.css" rel="stylesheet">
</head>

<body style="background: #192b38">
```

```

<!--MAIN CONTENT-->
<div id="login-page">
  <div class="container">
    <form class="form-login" action="" method="POST">
      <h2 class="form-login-heading">sign in now</h2>
      <div class="login-wrap">
        <input type="text" class="form-control" placeholder="User ID" name="uname" autofocus>
        <br>
        <input type="password" class="form-control" placeholder="Password" name="pword">
        <label class="checkbox">
          <input type="checkbox" value="remember-me"> Remember me
          <span class="pull-right">
            <a data-toggle="modal" href="login.html#myModal"> Forgot Password?</a>
          </span>
        </label>
        <input class="btn btn-theme btn-block" href="<?php $open_dashboard;?>" type="submit"
name="submit" value="SIGN IN">
        <!-- <hr> -->

        <!-- <div class="registration">
          Don't have an account yet?<br/>
          <a class="" href="#">
            Create an account
          </a>
        </div> -->
      </div>
    <!-- Modal -->
    <div aria-hidden="true" aria-labelledby="myModalLabel" role="dialog" tabindex="-1"
id="myModal" class="modal fade">
      <div class="modal-dialog">
        <div class="modal-content">
          <div class="modal-header">
            <button type="button" class="close" data-dismiss="modal" aria-
hidden="true">&times;</button>
            <h4 class="modal-title">Forgot Password ?</h4>
          </div>
          <div class="modal-body">
            <p>Enter your e-mail address below to reset your password.</p>
            <input type="text" name="email" placeholder="Email" autocomplete="off" class="form-
control placeholder-no-fix">
          </div>

          </div>
        </div>
      </div>
    <!-- modal -->
  </form>
</div>
</div>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<!--BACKSTRETCH-->
<!-- You can use an image of whatever size. This script will stretch to fit in any screen size.-->

```

```

<script type="text/javascript" src="lib/jquery.backstretch.min.js"></script>
<!-- <script>
$.backstretch("img/login-bg.jpg", {
    speed: 500
});
</script> -->
</body>

</html>

```

dashboard.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta name="description" content="">
<meta name="author" content="Dashboard">
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
<title>RDNC Service Portal - Purchase</title>

<!-- Favicons -->
<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
<link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">
<script src="lib/chart-master/Chart.js"></script>

```

</head>

<body>

<section id="container">

<?php include("include/menu.php");?>

<!-- *** MAIN CONTENT ***** -->

<section id="main-content">

<section class="wrapper">

<h3><i class="fa fa-angle-right"></i> Dashboard </h3>

<div class="row mb">

<!-- page start-->

<div class="">

<div class="col-md-4 mb">

<!-- WHITE PANEL - TOP USER -->

<div class="green-panel pn">

<div class="green-header">

<h5>Total Parties</h5>

</div>

<?php

\$party_query=mysqli_query(\$conn,"SELECT * FROM party");

\$party_num_rows=mysqli_num_rows(\$party_query);

?>

<div class="row">

<div class="col-md-12">

<h1 style="color: #fff;font-size: 100px"><?php echo \$party_num_rows;?></h1>

</div>

</div>

</div>

</div>

<div class="col-md-4 mb">

<!-- WHITE PANEL - TOP USER -->

<div class="darkblue-panel pn">

<div class="darkblue-header">

<h5>Purchase Orders</h5>

</div>

<?php

\$purchase_query=mysqli_query(\$conn,"SELECT * FROM purchase");

\$purchase_num_rows=mysqli_num_rows(\$purchase_query);

?>

<div class="row">

<div class="col-md-12">

<h1 style="color: #fff;font-size: 100px"><?php echo \$purchase_num_rows;?></h1>

</div>

</div>

</div>

```

</a>

</div>
<div class="col-md-4 mb">
  <!-- WHITE PANEL - TOP USER -->
  <div class="grey-panel pn donut-chart">
    <div class="grey-header">
      <h5>Total Products</h5>
    </div>
    <?php
      $product_query=mysqli_query($conn,"SELECT * FROM product");
      $product_num_rows=mysqli_num_rows($product_query);

      ?>
    <div class="row">
      <div class="col-md-12">
        <h1 style="font-size: 100px;"><?php echo $product_num_rows;?></h1>
      </div>
    </div>
  </div>
</div>
</div>
</div>
</div>
</div>
</section>
</section>
<!--main content end-->
<!--footer start-->
<!-- <footer class="site-footer">
  <div class="text-center">
    <p>
      &copy; Copyrights All Rights Reserved
    </p>
    <div class="credits">

  </div>
  <a href="advanced_table.html#" class="go-top">
    <i class="fa fa-angle-up"></i>
  </a>
  </div>
</footer> -->
</section>

<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>

```

```

<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
<script type="text/javascript">
$(document).ready(function() {
    var unique_id = $.gritter.add({
        // (string | mandatory) the heading of the notification
        title: 'Welcome <?php echo $user; ?>',
        // (string | mandatory) the text inside the notification
        text: 'Hover me to enable the Close Button. You can hide the left sidebar clicking on the button
next to the logo.',
        // (string | optional) the image to display on the left
        image: 'img/ui-sam.jpg',
        // (bool | optional) if you want it to fade out on its own or just sit there
        sticky: false,
        // (int | optional) the time you want it to be alive for before fading out
        time: 8000,
        // (string | optional) the class name you want to apply to that specific message
        class_name: 'my-sticky-class'
    });

    return false;
});
</script>
<script type="application/javascript">
$(document).ready(function() {
    $("#date-popover").popover({
        html: true,
        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });

    $("#my-calendar").zabuto_calendar({
        action: function() {
            return myDateFunction(this.id, false);
        },
        action_nav: function() {
            return myNavFunction(this.id);
        },
        ajax: {
            url: "show_data.php?action=1",
            modal: true
        },
        legend: [{
            type: "text",
            label: "Special event",
            badge: "00"
        },
        {
            type: "block",
            label: "Regular event",

```

```

    }
  }
});
});

function myNavFunction(id) {
  $("#date-popover").hide();
  var nav = $("#" + id).data("navigation");
  var to = $("#" + id).data("to");
  console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

```

menu.php

```

<?php
include('connect.php');
$q=mysqli_query($conn,"SELECT MAX(id) as id FROM purchase ")or die(mysqli_error());

while($f=mysqli_fetch_array($q)){

  $poid=$f['id'];
}

?>

<!--header start-->
<header class="header black-bg">
  <div class="sidebar-toggle-box">
    <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
  </div>
  <!--logo start-->
  <a href="index.php" class="logo" ></a>
  <!--logo end-->

  <div class="top-menu">
    <ul class="nav pull-right top-menu">
      <li><a class="logout" href="logout.php">Logout</a></li>
    </ul>
  </div>
</header>
<!--header end-->
<!-- ***** MAIN SIDEBAR MENU -->

<!--sidebar start-->
<aside>
  <div id="sidebar" class="nav-collapse ">

```

```

<!-- sidebar menu start-->
<ul class="sidebar-menu" id="nav-accordion">
  <p class="centered"><a href="profile.php"></a></p>
  <h5 class="centered"><?php echo $user;?></h5>
  <li class="mt">
    <a href="dashboard.php">
      <i class="fa fa-dashboard"></i>
      <span>DASHBOARD</span>
    </a>
  </li>
  <li class="sub-menu">
    <a href="purchase_order.php?id=<?php echo $poid+1; ?>">
      <i class="fa fa-th"></i>
      <span>Generate PO</span>
    </a>
  </li>
  <li>
    <a href="generate-po.php">
      <i class="fa fa-eye"></i>
      <span>View All PO</span>
    </a>
  </li>
  <li class="sub-menu">
    <a class="active" href="javascript:;">
      <i class="fa fa-tasks"></i>
      <span>Products</span>
    </a>
    <ul class="sub">
      <li><a href="add-product.php">Add Product</a></li>
      <li class=""><a href="view-products.php">View All Products</a></li>
    </ul>
  </li>
  <li class="sub-menu">
    <a class="active" href="javascript:;">
      <i class="fa fa-tasks"></i>
      <span>Party</span>
    </a>
    <ul class="sub">
      <li><a href="new-party.php">Add New Party</a></li>
      <li class=""><a href="view-all-party.php">View All Party</a></li>
    </ul>
  </li>
  <li class="sub-menu">
    <a class="active" href="javascript:;">
      <i class="fa fa-tasks"></i>
      <span>Department</span>
    </a>
    <ul class="sub">
      <li><a href="add-department.php">Add Department</a></li>
      <li class=""><a href="view-department.php">View All Departments</a></li>
    </ul>
  </li>
  <li class="sub-menu">

```



```

        <a class="active" href="javascript:.">
        <i class="fa fa-tasks"></i>
        <span>Staff</span>
        </a>
        <ul class="sub">
        <li><a href="add-staff.php">Add Staff</a></li>
        <li class=""><a href="view-staff.php">View All Staffs</a></li>
        </ul>
    </li>
    <li>
        <a href="profile.php">
        <i class="fa fa-user"></i>
        <span>Profile</span>
        </a>

    </li>
</ul>
<!-- sidebar menu end-->
</div>
</aside>
<!--sidebar end-->

```

purchase-order.php

```

<?php
session_start();
include('connect.php');
error_reporting(0);
$id=$_GET['id'];

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

if (isset($_POST['addrow'])) {

$po_no=$_POST['po_no'];
$item=$_POST['item'];
$qty=$_POST['qty'];
$tax=$_POST['tax'];
$disc=$_POST['disc'];
$rate=$_POST['rate'];
$amount=$rate*$qty;
$disc_amount=$amount*$disc/100;
$amount_after_disc=$amount-$disc_amount;
$gst_amount=$amount_after_disc*$tax/100;
$net_amount=$amount+$gst_amount-$disc_amount;

```

```
$po_date=$_POST['po_date'];
$party_name=$_POST['party_name'];
$address=$_POST['addr'];
$depart=$_POST['depart'];
$staff=$_POST['staff'];
```

```
mysql_query($conn,"INSERT INTO
purchase_order(po_no,items,qty,gst,discount,mrp,amount,gst_amount,total_discount,net_amount,po
_date,party_name,address,department,staff)VALUES('$po_no','$items','$qty','$tax','$disc','$rate','$am
ount','$gst_amount','$disc_amount','$net_amount','$po_date','$party_name','$address','$depart','$staf
f')") or die(mysql_error($conn));
```

```
/*if ($inq) {
    echo "inserted";
} else {
    echo "not inserted";
}*/
```

```
}
```

```
if (isset($_POST['save'])) {
```

```
    $po_code="RDNC00";
    $po_num=$_POST['po_num'];
    $po_date=$_POST['po_date'];
    $party_name=$_POST['party_name_purchase'];
    $address=$_POST['address'];
    $depart=$_POST['depart'];
    $staff=$_POST['staff'];
    $tot_amt=$_POST['tot_amt'];
    $tot_gst=$_POST['tot_gst'];
    $tot_disc=$_POST['tot_disc'];
    $net_amt=$_POST['net_amt'];
    $poq=mysql_query($conn,"INSERT INTO
```

```
purchase(po_code,po_number,date,party_name,address,department,staff,gross_amount,discount,tax
,net_amount)VALUES('$po_code','$po_num','$po_date','$party_name','$address','$depart','$staff','$to
t_amt','$tot_disc','$tot_gst','$net_amt')") or die(mysql_error($conn));
```

```
    if ($poq) {
        header('location:purchase_order_print.php?id='.$id);
    }
}
```

```
?>
```

```
<!DOCTYPE html>
<html lang="en">
```

```
<head>
```

```
<meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<meta name="description" content="">
```

```
<meta name="author" content="Dashboard">
```

```
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
```

```

Fluid, Retina">
<title>RDNC Service Portal - Purchase</title>

<!-- Favicons -->
<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link rel="stylesheet" type="text/css" href="lib/bootstrap-datepicker/css/datepicker.css" />
<link rel="stylesheet" type="text/css" href="lib/bootstrap-daterangepicker/daterangepicker.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">

</head>

<body>
<section id="container">

    <?php include("include/menu.php");?>
    <!-- *** MAIN CONTENT ***** -->
    <section id="main-content">
        <section class="wrapper">
            <h3><i class="fa fa-angle-right"></i> PO GENERATION</h3>
            <!-- BASIC FORM ELELEMNTS -->

            <div class="row mt">
                <div class="col-lg-12">
                    <div class="form-panel">
                        <h4 class="mb"><i class="fa fa-angle-right"></i> PO ENTRY</h4>
                        <form class="form-horizontal style-form" method="POST">
                            <div class="form-group">
                                <label class="col-sm-1 col-sm-1 control-label"><b>PO Number</b></label>
                                <div class="col-sm-2">
                                    <input type="text" class="form-control" name="po_num" placeholder="--RDNC00--"
value="<?php echo "RDNC00".$id;?>" readonly>
                                </div>
                                <label class="col-sm-1 control-label"><b>PO Date</b></label>
                                <div class="col-sm-2">
                                    <input type="date" class="form-control form-control-inline input-medium"
name="po_date" value="<?php echo date('Y-m-d');?>">
                                </div>
                                <label class="col-sm-1 control-label"><b>Party Name</b></label>
                                <div class="col-sm-2">
                                    <?php
                                        $sq=mysqli_query($conn,"SELECT * FROM purchase_order WHERE po_no=$id");
                                        $sqrow=mysqli_fetch_array($sq);
                                    ?>
                                    <select class="form-control" name="party_name_opt" id="part">
                                        <option>--Party Name--</option>

```

```

        <option selected><?php echo $sqrow['party_name'];?></option>
        <?php

        $party_query=mysqli_query($conn,"SELECT * FROM party ORDER BY
party_name");

        while ($party_data=mysqli_fetch_array($party_query)) {

                ?><option value="<?php echo $party_data['id']; ?>"><?php echo
$party_data['party_name']; } ?></option>

        </select>
        <div id="addr"></div>
        <input type="hidden" class="form-control" name="address" value="<?php echo
$sqrow['address']; ?>">
        <input type="hidden" class="form-control" name="party_name_purchase"
value="<?php echo $sqrow['party_name']; ?>">
        </div>

```

```

</div>

<div class="form-group">
    <label class="col-sm-1 col-sm-1 control-label"><b>Department</b></label>
    <div class="col-sm-2">
        <select class="form-control" name="depart">
            <option>--DEPARTMENT--</option>
            <option selected><?php echo $sqrow['department'];?></option>
            <?php
            $dept_query=mysqli_query($conn,"SELECT * FROM department ORDER BY
department_name");
            while ($dept_query_rows=mysqli_fetch_array($dept_query)) {

                    ?>
                    <option><?php echo $dept_query_rows['department_name'];?></option>
                    <?php

                    }

                    ?>

            </select>
        </div>
        <label class="col-sm-1 control-label"><b>Staff</b></label>
        <div class="col-sm-2">
            <select class="form-control" name="staff">>
                <option>--STAFF--</option>
                <option selected><?php echo $sqrow['staff'];?></option>

```

```

        staff_name");
        while ($dept_query_rows=mysqli_fetch_array($dept_query)) {

            ?>
            <option><?php echo $dept_query_rows['staff_name'];?></option>
            <?php

        }

        ?>

    </select>
</select>
</div>

</div>

<!-- col-lg-12-->
<div class="row mt">
<div class="col-lg-12">
    <div class="form-panel" style="box-shadow: 0px 0px 0px;">
        <h4 class="mb"><i class="fa fa-angle-right"></i> Product Details</h4>
        <div class="form-group">
            <!-- <div class="col-sm-3"> -->
            <div class="col-sm-2">
                <select class="form-control" name="items" id="prod">
                    <option>--Item Name--</option>
                    <?php

                    $product_query=mysqli_query($conn,"SELECT * FROM product ORDER
BY product_name");
                    while ($product_data=mysqli_fetch_array($product_query)) {

                        ?><option value="<?php echo $product_data['id'];?>"><?php echo
$product_data['product_name'];?></option>

                    </select>
                </div>
                <div id="subr"> </div>
                <div class="col-sm-1">
                    <input type="submit" name="addrow" class="btn btn-theme" value="Add Row"
>

                </div>

            </div>
            <!-- </form> -->
            <!-- </div> -->

```

```

        <div class="row mb">
<!-- page start-->
<div class="content-panel" style="box-shadow: 0px 0px 0px;">
    <div class="adv-table">
        <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
            <thead>
                <tr>
                    <th>#</th>
                    <th>Item Name</th>
                    <th>Qty</th>
                    <th class="hidden-phone">Rate (per unit)</th>
                    <th class="hidden-phone">Disc%</th>
                    <th class="hidden-phone">Tax%</th>
                    <th class="hidden-phone">Amount</th>
                    <th class="hidden-phone">Tax Amount</th>
                    <th class="hidden-phone">Discount Amount</th>
                    <th class="hidden-phone">Net Amount</th>
                    <th class="hidden-phone">Edit</th>
                    <th class="hidden-phone">Delete</th>
                </tr>
            </thead>
            <tbody id="purchase_items">
                <?php
                    $delete;
                    $nr=0;
                    $query=mysqli_query($conn,"SELECT * FROM purchase_order WHERE
po_no=$id")or die();
                    while ($row=mysqli_fetch_array($query)) {
                        $nr++;
                        $delete=$row['product_id'];
                        echo "
                    <tr class='gradeX'>
                        <td>".$nr."</td>
                        <td>".$row['items']."</td>
                        <td>".$row['qty']."</td>
                        <td class='hidden-phone'>".$row['mrp']."</td>
                        <td class='center hidden-phone'>".$row['discount']."</td>
                        <td class='center hidden-phone'>".$row['gst']."</td>
                        <td class='center hidden-phone'>".$row['amount']."</td>
                        <td class='center hidden-phone'>".$row['gst_amount']."</td>
                        <td class='center hidden-phone'>".$row['total_discount']."</td>
                        <td class='center hidden-phone'>".$row['net_amount']."</td>
                        <td><a
href='purchase_order_edit.php?po_id=".$id."&polid=$row[product_id]'><button class='btn btn-primary
btn-xs'><i class='fa fa-pencil'></i></button></a></td>
                        <td><a href='purchase_order_delete.php?po_id=".$id."&polid=".$delete."'
onclick='return onDelete()'><button class='btn btn-danger btn-xs' name='delete'><i class='fa fa-trash-o
'></i></button></a></td>
                    </tr>";
                }
            }
        }
    }

```

```

        if (isset($_POST['delete'])) {
            $dlquery=mysqli_query($conn,"DELETE FROM purchase_order WHERE
product_id=$delete") or die("error");
            if ($dlquery) {
                echo "Records deleted";
                ?>
                <meta http-equiv="refresh" content="0;
URL=http://localhost/RD/purchase_order.php?id=<?php echo $id;?>">

                <?php

            } else {
                echo "Deletion process failed";
            }
        }
    ?>
    <script type="text/javascript">
        function ondelete() {
            return confirm('Are you sure you want to delete this entry?');
        }
    </script>
</tbody>
</table>
<!-- </form> -->
</div>
</div>
<!-- page end-->
<!--page start-->
<div class="content-panel" style="box-shadow: 0px 0px 0px;">
    <table class="table table-hover">
        <tr>
            <td><i class="fa fa-angle-right"></i> Total</td>
        </tr>
        <tr>
            <td><?php
                $tq=mysqli_query($conn,"SELECT
SUM(total_discount),SUM(amount),SUM(gst_amount),SUM(net_amount) FROM purchase_order
WHERE po_no=$id") or die(mysqli_error($conn));
                $tqrow=mysqli_fetch_array($tq);
                $tot_amt=number_format($tqrow['SUM(amount)'],2);
                $tot_gst=number_format($tqrow['SUM(gst_amount)'],2);
                $tot_disc=number_format($tqrow['SUM(total_discount)'],2);
                $net_amt=number_format($tqrow['SUM(net_amount)'],2);

                function floatvalue($val){
                    $val = str_replace(",",".",$val);
                    $val = preg_replace('/\.(?=.*/)/', "", $val);
                    return floatval($val);
                }

            ?>
            <input type="hidden" name="tot_amt" value="<?php echo floatvalue($tot_amt);?>">
            <input type="hidden" name="tot_gst" value="<?php echo floatvalue($tot_gst);?>">
            <input type="hidden" name="tot_disc" value="<?php echo floatvalue($tot_disc);?>">
            <input type="hidden" name="net_amt" value="<?php echo floatvalue($net_amt);?>">
        </td>
        </tr>
    </table>

```

```

        <tr>
            <th>Gross Amount:</th>
            <td><?php echo $tot_amt;?></td>
        </tr>
        <tr>
            <th>GST:</th>
            <td><?php echo $tot_gst;?></td>
        </tr>
        <tr>
            <th>Total Discount:</th>
            <td><?php echo $tot_disc;?></td>
        </tr>
        <tr>
            <th>Net Amount:</th>
            <td><?php echo $net_amt;?></td>
        </tr>
    </tbody>
</table>
</div>
<div class="col-sm-2">
    <button name="save" class="btn btn-theme ">Save & Print</button>
</form>
</div>
<!--page end-->
</div>
</div>
<!-- /form-panel -->
</div>
<!-- /col-lg-12 -->
</div>
</div>
<!-- /row -->

</section>
<!-- /wrapper -->

</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
        <a href="purchase_order.php#" class="go-top">
            <i class="fa fa-angle-up"></i>
        </a>
    </div>
</footer>

```


</section>

<!-- js placed at the end of the document so the pages load faster -->

<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>

<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>

<script src="lib/jquery.scrollTo.min.js"></script>

<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>

<!--common script for all pages-->

<script src="lib/common-scripts.js"></script>

<!--script for this page-->

<script src="lib/jquery-ui-1.9.2.custom.min.js"></script>

<script type="text/javascript" src="lib/bootstrap-fileupload/bootstrap-fileupload.js"></script>

<script type="text/javascript" src="lib/bootstrap-datepicker/js/bootstrap-datepicker.js"></script>

<script type="text/javascript" src="lib/bootstrap-daterangepicker/date.js"></script>

<script type="text/javascript" src="lib/bootstrap-daterangepicker/daterangepicker.js"></script>

<script type="text/javascript" src="lib/bootstrap-datetimepicker/js/bootstrap-datetimepicker.js"></script>

<script type="text/javascript" src="lib/bootstrap-daterangepicker/moment.min.js"></script>

<script type="text/javascript" src="lib/bootstrap-timepicker/js/bootstrap-timepicker.js"></script>

<script src="lib/advanced-form-components.js"></script>

<script type="text/javascript">

\$(document).ready(function()

{

\$("#prod").change(function()

{

var id=\$(this).val();

var dataString = 'id='+ id;

\$.ajax

({

type: "POST",

url: "prod_entry.php?id=<?php echo \$id;?>",

data: dataString,

cache: false,

success: function(html)

{

\$("#subr").html(html);

}

});

});

});

</script>

<script type="text/javascript">

\$(document).ready(function()

{

\$("#part").change(function()

{

var id=\$(this).val();

var dataString = 'id='+ id;

```

$.ajax
({
type: "POST",
url: "part_entry.php?id=<?php echo $id;?>",
data: dataString,
cache: false,
success: function(html)
{
$("#addr").html(html);
}
});

});

</script>
</body>

</html>

```

generate-po.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta name="description" content="">
<meta name="author" content="Dashboard">
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
<title>RDNC Service Portal - Purchase</title>

<!-- Favicons -->
<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">

```

```

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
<link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">

<!-- =====
Template Name: Dashio
Template URL: https://templatemag.com/dashio-bootstrap-admin-template/
Author: TemplateMag.com
License: https://templatemag.com/license/
===== -->
</head>

<body>
<section id="container">
  <!--
  *****
  *****
  TOP BAR CONTENT & NOTIFICATIONS
  *****
  ***** -->
  <!--header start-->
  <header class="header black-bg">
    <div class="sidebar-toggle-box">
      <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
    </div>
    <!--logo start-->
    <a href="index.html" class="logo"></a>
    <!--logo end-->

    <div class="top-menu">
      <ul class="nav pull-right top-menu">
        <li><a class="logout" href="login.html">Logout</a></li>
      </ul>
    </div>
  </header>
  <!--header end-->

  <?php include("include/menu.php")?>
  <!--MAIN CONTENT -->

  <section id="main-content">
    <section class="wrapper">

```

```

<h3><i class="fa fa-angle-right"></i> View All PO </h3>
<div class="row mb">
  <!-- page start-->
  <div class="content-panel">
    <div class="adv-table">
      <div class="col-md-12">
        <div class="form-group">
          <form method="POST" action="">
            <label class="control-label col-md-3"></label>
            <div class="col-md-4">
              <div class="input-group input-large" data-date="01/01/2014" data-date-
format="mm/dd/yyyy">
                <input type="date" class="form-control" name="from" value="<?php echo $from; ?>">
                <span class="input-group-addon">To</span>
                <input type="date" class="form-control" name="to" value="<?php echo $to; ?>">
              </div>
              <span class="help-block">Select date range</span>
            </div>
            <div class="col-md-4">
              <button class="btn btn-theme02" name="range">Select Range</button>
            </div>
          </form>
        </div>
      </div>
      <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
        <thead>
          <tr>
            <th>#</th>
            <th>Date</th>
            <th>PO Number</th>
            <th class="hidden-phone">Party</th>
            <th class="hidden-phone">Department</th>
            <th class="hidden-phone">Staff</th>
            <th class="hidden-phone">Gross Amount</th>
            <th class="hidden-phone">GST (SGST+CGST)</th>
            <th class="hidden-phone">Discount</th>
            <th class="hidden-phone">Net Amount</th>
            <th class="hidden-phone">View/Print</th>
            <th class="hidden-phone">Edit</th>
            <th class="hidden-phone">Delete</th>
          </tr>
        </thead>
        <tbody>
          <?php

          $count=0;
          $sql="SELECT * FROM purchase";
          if (isset($_POST['range'])) {

            $from=$_POST['from'];
            $to=$_POST['to'];
            $sql="SELECT * FROM purchase WHERE date BETWEEN '$from' and '$to' ORDER
BY date";

```

```

    }

    $query=mysqli_query($conn,$sql);
    while ($rows=mysqli_fetch_array($query)) {
        $count++;

        ?>
        <tr class="gradeA">
            <td><?php echo $count;?></td>
            <td><?php echo $rows['date'];?></td>
            <td><?php echo $rows['po_number'];?></td>
            <td class="hidden-phone"><?php echo $rows['party_name'];?></td>
            <td class="center hidden-phone"><?php echo $rows['department'];?></td>
            <td class="center hidden-phone"><?php echo $rows['staff'];?></td>
            <td class="center hidden-phone"><?php echo $rows['gross_amount'];?></td>
            <td class="hidden-phone"><?php echo $rows['tax'];?></td>
            <td class="hidden-phone"><?php echo $rows['discount'];?></td>
            <td class="hidden-phone"><?php echo $rows['net_amount'];?></td>
            <td><a href="po-view.php?id=<?php echo $rows['id'];?>"><button class="btn btn-info
btn-xs"><i class="fa fa-eye"></i></button></a></td>
            <td><a href="po-edit.php?id=<?php echo $rows['id'];?>"><button class="btn btn-primary
btn-xs"><i class="fa fa-pencil"></i></button></a></td>
            <td><a href="po-delete.php?id=<?php echo $rows['id'];?>"><button class="btn btn-
danger btn-xs"><i class="fa fa-trash-o "></i></button></a></td>
        </tr>
        <?php } ?>

    </tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
        <a href="generate-po.php#" class="go-top">
            <i class="fa fa-angle-up"></i>
        </a>
    </div>
</footer>
<!--footer end-->

```

```

</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!-- common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script type="text/javascript">
/* Formating function for row details */
function fnFormatDetails(oTable, nTr) {
    var aData = oTable.fnGetData(nTr);
    var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
    sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] ;
    sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
    sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
    sOut += '</table>';

    return sOut;
}

$(document).ready(function() {
/*
 * Insert a 'details' column to the table
 */
var nCloneTh = document.createElement('th');
var nCloneTd = document.createElement('td');
nCloneTd.innerHTML = '';
nCloneTd.className = "center";

$('#hidden-table-info thead tr').each(function() {
    this.insertBefore(nCloneTh, this.childNodes[0]);
});

$('#hidden-table-info tbody tr').each(function() {
    this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
});

/*
 * Initialise DataTables, with no sorting on the 'details' column
 */
var oTable = $('#hidden-table-info').dataTable({
    "aoColumnDefs": [{
        "bSortable": false,
        "aTargets": [0]
    }],
    "aaSorting": [

```

```

        [1, 'asc']
    ]
});

/* Add event listener for opening and closing details
 * Note that the indicator for showing which row is open is not controlled by DataTables,
 * rather it is done here
 */
$('#hidden-table-info tbody td img').live('click', function() {
    var nTr = $(this).parents('tr')[0];
    if (oTable.fnIsOpen(nTr)) {
        /* This row is already open - close it */
        this.src = "lib/advanced-datatable/media/images/details_open.png";
        oTable.fnClose(nTr);
    } else {
        /* Open this row */
        this.src = "lib/advanced-datatable/media/images/details_close.png";
        oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr), 'details');
    }
});
});
</script>
</body>

</html>

```

new-party.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

if (isset($_POST['save_party'])) {

    $party_name=$_POST['party_name'];
    $db_id=$_POST['db_id'];
    $pan=$_POST['pan'];
    $dl_no=$_POST['dl_no'];
    $gst_in=$_POST['gst_in'];
    $addr1=$_POST['addr1'];
    $addr2=$_POST['addr2'];
    $email=$_POST['email'];
    $state=$_POST['state'];
    $pin=$_POST['pin'];

```

```
mysqli_query($conn,"INSERT INTO
party(party_name,drug_bazar_id,pan,dL_no,gstin,address1,address2,email,state,pin)VALUES('$party
_name','$db_id','$pan','$dL_no','$gstin','$addr1','$addr2','$email','$state','$pin')") or
die(mysqli_error($conn));
```

```
}
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<meta name="description" content="">
```

```
<meta name="author" content="Dashboard">
```

```
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">
```

```
<title>RDNC Service Portal - Purchase</title>
```

```
<!-- Favicons -->
```

```
<link href="img/logo.png" rel="icon">
```

```
<link href="img/logo.png" rel="apple-touch-icon">
```

```
<!-- Bootstrap core CSS -->
```

```
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
<!--external css-->
```

```
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
```

```
<link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
```

```
<link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
```

```
<!-- Custom styles for this template -->
```

```
<link href="css/style.css" rel="stylesheet">
```

```
<link href="css/style-responsive.css" rel="stylesheet">
```

```
<script src="lib/chart-master/Chart.js"></script>
```

```
</head>
```

```
<body>
```

```
<section id="container">
```

```
<?php include("include/menu.php");?>
```

```
<!-- *** MAIN CONTENT ***** -->
```

```
<section id="main-content">
```

```
<section class="wrapper">
```

```
<h3><i class="fa fa-angle-right"></i> Add New Party</h3>
```

```
<!-- BASIC FORM ELELEMNTS -->
```

```
<div class="row mt">
```

```
<div class="col-lg-12">
```

```
<div class="form-panel">
```

```
<h4 class="mb"><i class="fa fa-angle-right"></i> New Party Information</h4>
```



```
<form class="form-horizontal style-form" method="POST">
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Party Name</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="party_name">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Drug Bazar Id</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="db_id">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Pan</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="pan">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">DL No.</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="dl_no">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">GSTIN</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="gstin">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Address1</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="addr1">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Address2</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="addr2">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">Email</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="email">
    </div>
  </div>
  <div class="form-group">
    <label class="col-sm-2 col-sm-2 control-label">State</label>
    <div class="col-sm-10">
      <input type="text" class="form-control" name="state">
    </div>
  </div>
```

```

        </div>
        <div class="form-group">
            <label class="col-sm-2 col-sm-2 control-label">PIN</label>
            <div class="col-sm-10">
                <input type="text" class="form-control" name="pin">
            </div>
        </div>
        <div class="form-group" align="center">
            <div class="col-sm-10">
                <input type="submit" name="save_party" class="btn btn-theme " value="Save">
            </div>
        </div>

    </form>
</div>
</div>
<!-- col-lg-12-->
</div>
<!-- /row -->

</section>
<!-- /wrapper -->
</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
            <a href="advanced_table.html#" class="go-top">
                <i class="fa fa-angle-up"></i>
            </a>
        </div>
    </footer>
</section>

<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>

```

```

<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
<script type="text/javascript">
$(document).ready(function() {
    var unique_id = $.gritter.add({
        // (string | mandatory) the heading of the notification
        title: 'Welcome <?php echo $user; ?>',
        // (string | mandatory) the text inside the notification
        text: 'Hover me to enable the Close Button. You can hide the left sidebar clicking on the button
next to the logo.',
        // (string | optional) the image to display on the left
        image: 'img/ui-sam.jpg',
        // (bool | optional) if you want it to fade out on its own or just sit there
        sticky: false,
        // (int | optional) the time you want it to be alive for before fading out
        time: 8000,
        // (string | optional) the class name you want to apply to that specific message
        class_name: 'my-sticky-class'
    });

    return false;
});
</script>
<script type="application/javascript">
$(document).ready(function() {
    $("#date-popover").popover({
        html: true,
        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });

    $("#my-calendar").zabuto_calendar({
        action: function() {
            return myDateFunction(this.id, false);
        },
        action_nav: function() {
            return myNavFunction(this.id);
        },
        ajax: {
            url: "show_data.php?action=1",
            modal: true
        },
        legend: [{
            type: "text",
            label: "Special event",
            badge: "00"
        },
        {
            type: "block",
            label: "Regular event",

```

```

    }
  ]
});
});

function myNavFunction(id) {
  $("#date-popover").hide();
  var nav = $("#" + id).data("navigation");
  var to = $("#" + id).data("to");
  console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

```

view-all-party.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
  header('location:index.php');
}

$count = 0;
$query = mysqli_query($conn,"SELECT * FROM party");
$rows = mysqli_num_rows($query);

if ($rows!=0) {

?>

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta name="description" content="">
  <meta name="author" content="Dashboard">
  <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
  <title>RDNC Service Portal - Purchase</title>

  <!-- Favicons -->

```

```

<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
<link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">

<!-- =====
Template Name: Dashio
Template URL: https://templatemag.com/dashio-bootstrap-admin-template/
Author: TemplateMag.com
License: https://templatemag.com/license/
===== -->
</head>

<body>
<section id="container">
  <!--
  *****
  *****
  TOP BAR CONTENT & NOTIFICATIONS
  *****
  ***** -->

  <!--header start-->
  <header class="header black-bg">
    <div class="sidebar-toggle-box">
      <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
    </div>
    <!--logo start-->
    <a href="index.html" class="logo"></a>
    <!--logo end-->

    <div class="top-menu">
      <ul class="nav pull-right top-menu">
        <li><a class="logout" href="login.html">Logout</a></li>
      </ul>
    </div>
  </header>
  <!--header end-->

  <?php include("include/menu.php");>
  <!--MAIN CONTENT -->

```

```

<section id="main-content">
<section class="wrapper">
<h3><i class="fa fa-angle-right"></i> View All Party </h3>
<div class="row mb">
<!-- page start-->
<div class="content-panel">
<div class="adv-table">
<table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
<thead>
<tr>
<th>SN</th>
<th>Name</th>
<th class="hidden-phone">Pan</th>
<th class="hidden-phone">DL No.</th>
<th class="hidden-phone">Address</th>
<th class="hidden-phone">State</th>
<th class="hidden-phone">Edit</th>
<th class="hidden-phone">Delete</th>
<!-- <th class="hidden-phone">Sub Count</th> -->
</tr>
</thead>
<tbody>
<?php
while ($data=mysqli_fetch_assoc($query)) {
$count++;

echo "
<tr class='gradeX'>
<td>".$count."</td>
<td>".$data['party_name']."</td>
<td class='hidden-phone'>".$data['pan']."</td>
<td class='center hidden-phone'>".$data['dl_no']."</td>
<td class='center hidden-phone'>".$data['address1']."</td>
<td class='center hidden-phone'>".$data['state']."</td>
<td><a href='party-
edit.php?id=$data[id]&&pn=$data[party_name]&&pan=$data[pan]&&dl=$data[dl_no]&&adr=$data[ad
dress1]&&st=$data[state]'><button class='btn btn-primary btn-xs'><i class='fa fa-
pencil'></i></button></a></td>
<td><a href='delete-party.php?id=$data[id]' onclick='return ondelete()'><button
class='btn btn-danger btn-xs'><i class='fa fa-trash-o'></i></button></a></td>
</tr>";
}

} else {
echo "No data here";
}

?>
<script type="text/javascript">
function ondelete() {
return confirm('Are you sure you want to delete this entry?');
}

```

```

</script>

</tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
<div class="text-center">
<p>
&copy; Copyrights All Rights Reserved
</p>
<div class="credits">

</div>
<a href="advanced_table.html#" class="go-top">
<i class="fa fa-angle-up"></i>
</a>
</div>
</footer>
<!--footer end-->
</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script type="text/javascript">
/* Formating function for row details */
function fnFormatDetails(oTable, nTr) {
var aData = oTable.fnGetData(nTr);
var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] + '</td></tr>';
sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
sOut += '</table>';

```

```

    return sOut;
}

$(document).ready(function() {
    /*
     * Insert a 'details' column to the table
     */
    var nCloneTh = document.createElement('th');
    var nCloneTd = document.createElement('td');
    nCloneTd.innerHTML = '';
    nCloneTd.className = "center";

    $('#hidden-table-info thead tr').each(function() {
        this.insertBefore(nCloneTh, this.childNodes[0]);
    });

    $('#hidden-table-info tbody tr').each(function() {
        this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
    });

    /*
     * Initialise DataTables, with no sorting on the 'details' column
     */
    var oTable = $('#hidden-table-info').dataTable({
        "aoColumnDefs": [{
            "bSortable": false,
            "aTargets": [0]
        }],
        "aaSorting": [
            [1, 'asc']
        ]
    });

    /* Add event listener for opening and closing details
     * Note that the indicator for showing which row is open is not controlled by DataTables,
     * rather it is done here
     */
    $('#hidden-table-info tbody td img').live('click', function() {
        var nTr = $(this).parents('tr')[0];
        if (oTable.fnIsOpen(nTr)) {
            /* This row is already open - close it */
            this.src = "lib/advanced-datatable/media/images/details_open.png";
            oTable.fnClose(nTr);
        } else {
            /* Open this row */
            this.src = "lib/advanced-datatable/images/details_close.png";
            oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr), 'details');
        }
    });
});
</script>
</body>

```


</html>

add-product.php

```
<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

if (isset($_POST['save_product'])) {

    $prod_name=$_POST['prod_name'];
    $manf=$_POST['manf'];
    $packing=$_POST['packing'];
    $hsn=$_POST['hsn'];
    $gst=$_POST['gst'];
    $mrp=$_POST['mrp'];
    $trd_prc=$_POST['trd_prc'];

    mysqli_query($conn,"INSERT
    INTO product(product_name,manufacturer,packing,hsn_no,gst,mrp,trade_price)VALUES('$prod_na
    me','$manf','$packing','$hsn','$gst','$mrp','$trd_prc')") or die(mysqli_error($conn));

}

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta name="description" content="">
    <meta name="author" content="Dashboard">
    <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
    Fluid, Retina">
    <title>RDNC Service Portal - Purchase</title>

    <!-- Favicons -->
    <link href="img/logo.png" rel="icon">
    <link href="img/logo.png" rel="apple-touch-icon">
```

```

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
<link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">
<script src="lib/chart-master/Chart.js"></script>

```

```

</head>

```

```

<body>

```

```

<section id="container">

```

```

<?php include("include/menu.php");?>

```

```

<!-- *** MAIN CONTENT ***** -->

```

```

<section id="main-content">

```

```

<section class="wrapper">

```

```

<h3><i class="fa fa-angle-right"></i> Add New Product or items</h3>

```

```

<!-- BASIC FORM ELELEMNTS -->

```

```

<div class="row mt">

```

```

<div class="col-lg-12">

```

```

<div class="form-panel">

```

```

<h4 class="mb"><i class="fa fa-angle-right"></i> New Product/Item Information</h4>

```

```

<form class="form-horizontal style-form" method="POST">

```

```

<div class="form-group">

```

```

<label class="col-sm-2 col-sm-2 control-label">Product Name</label>

```

```

<div class="col-sm-10">

```

```

<input type="text" class="form-control" name="prod_name">

```

```

</div>

```

```

</div>

```

```

<div class="form-group">

```

```

<label class="col-sm-2 col-sm-2 control-label">Manufacturer</label>

```

```

<div class="col-sm-10">

```

```

<input type="text" class="form-control" name="manf">

```

```

</div>

```

```

</div>

```

```

<div class="form-group">

```

```

<label class="col-sm-2 col-sm-2 control-label">Packing</label>

```

```

<div class="col-sm-10">

```

```

<input type="text" class="form-control" name="packing">

```

```

</div>

```

```

</div>

```

```

<div class="form-group">

```

```

<label class="col-sm-2 col-sm-2 control-label">HSN No.</label>

```

```

<div class="col-sm-10">

```

```

<input type="text" class="form-control" name="hsn">

```

```

</div>

```

```

<h4 class="mb"><i class="fa fa-angle-right"></i> Product Entry</h4>

```

```

</div>

```

```

<div class="form-group">

```

```

        <label class="col-sm-2 col-sm-2 control-label">GST</label>
        <div class="col-sm-10">
            <input type="text" class="form-control" name="gst">
        </div>
    </div>
    <div class="form-group">
        <label class="col-sm-2 col-sm-2 control-label">MRP</label>
        <div class="col-sm-10">
            <input type="text" class="form-control" name="mrp">
        </div>
    </div>
    <div class="form-group">
        <label class="col-sm-2 col-sm-2 control-label">Trade Price</label>
        <div class="col-sm-10">
            <input type="text" class="form-control" name="trd_prc">
        </div>
    </div>

    <div class="form-group" align="center">
        <div class="col-sm-10">
            <input type="submit" name="save_product" class="btn btn-theme " value="Save">
        </div>
    </div>

    </form>
</div>
</div>
<!-- col-lg-12-->
</div>
<!-- /row -->

</section>
<!-- /wrapper -->
</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
        <a href="advanced_table.html#" class="go-top">
            <i class="fa fa-angle-up"></i>
        </a>
    </div>
</footer>
</section>

<!-- js placed at the end of the document so the pages load faster -->

```

```

<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>
<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
<script type="text/javascript">
$(document).ready(function() {
    var unique_id = $.gritter.add({
        // (string | mandatory) the heading of the notification
        title: 'Welcome <?php echo $user; ?>',
        // (string | mandatory) the text inside the notification
        text: 'Hover me to enable the Close Button. You can hide the left sidebar clicking on the button
next to the logo.',
        // (string | optional) the image to display on the left
        image: 'img/ui-sam.jpg',
        // (bool | optional) if you want it to fade out on its own or just sit there
        sticky: false,
        // (int | optional) the time you want it to be alive for before fading out
        time: 8000,
        // (string | optional) the class name you want to apply to that specific message
        class_name: 'my-sticky-class'
    });

    return false;
});
</script>
<script type="application/javascript">
$(document).ready(function() {
    $("#date-popover").popover({
        html: true,
        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });

    $("#my-calendar").zabuto_calendar({
        action: function() {
            return myDateFunction(this.id, false);
        },
        action_nav: function() {
            return myNavFunction(this.id);
        },
        ajax: {

```

```

        url: "show_data.php?action=1",
        modal: true
    },
    legend: [{
        type: "text",
        label: "Special event",
        badge: "00"
    },
    {
        type: "block",
        label: "Regular event",
    }
    ]
});
});

function myNavFunction(id) {
    $("#date-popover").hide();
    var nav = $("#" + id).data("navigation");
    var to = $("#" + id).data("to");
    console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

```

view-all-product.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}
$count = 0;
$query = mysqli_query($conn,"SELECT * FROM product");
$rows = mysqli_num_rows($query);
if ($rows!=0) {

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">

```

```
<meta name="description" content="">
<meta name="author" content="Dashboard">
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">
<title>RDNC Service Portal - Purchase</title>
```

```
<!-- Favicons -->
<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">
```

```
<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
<link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">
```

```
<!-- =====
Template Name: Dashio
Template URL: https://templatemag.com/dashio-bootstrap-admin-template/
Author: TemplateMag.com
License: https://templatemag.com/license/
===== -->
```

```
</head>
```

```
<body>
```

```
<section id="container">
```

```
<!--
```

```
*****
*****
```

TOP BAR CONTENT & NOTIFICATIONS

```
*****
```

```
***** -->
```

```
<!--header start-->
```

```
<header class="header black-bg">
```

```
<div class="sidebar-toggle-box">
```

```
<div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
```

```
</div>
```

```
<!--logo start-->
```

```
<a href="index.html" class="logo"></a>
```

```
<!--logo end-->
```

```
<div class="top-menu">
```

```
<ul class="nav pull-right top-menu">
```

```
<li><a class="logout" href="login.html">Logout</a></li>
```

```
</ul>
```

```
</div>
```

```
</header>
```

```

<!--header end-->

<?php include("include/menu.php")?>
<!--MAIN CONTENT -->


<section id="main-content">
<section class="wrapper">
    <h3><i class="fa fa-angle-right"></i> View All Products </h3>
    <div class="row mb">
        <!-- page start-->
        <div class="content-panel">
            <div class="adv-table">
                <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
                    <thead>
                        <tr>
                            <th>Sr.No.</th>
                            <th>Product Name</th>
                            <th class="hidden-phone">Manufacturer</th>
                            <th class="hidden-phone">Packing</th>
                            <th class="hidden-phone">HSN No.</th>
                            <th class="hidden-phone">MRP</th>
                            <th class="hidden-phone">Trade Price</th>
                            <th class="hidden-phone">GST</th>
                            <th class="hidden-phone">Edit</th>
                            <th class="hidden-phone">Delete</th>
                            <!-- <th class="hidden-phone">Sub Count</th> -->
                        </tr>
                    </thead>
                    <tbody>
                        <?php
                            while ($data=mysqli_fetch_assoc($query)) {
                                $count++;

                                echo "
                                    <tr class='gradeX'>
                                        <td>".$count."</td>
                                        <td>".$data['product_name']."</td>
                                        <td class='hidden-phone'>".$data['manufacturer']."</td>
                                        <td class='center hidden-phone'>".$data['packing']."</td>
                                        <td class='center hidden-phone'>".$data['hsn_no']."</td>
                                        <td class='center hidden-phone'>".$data['mrp']."</td>
                                        <td class='center hidden-phone'>".$data['trade_price']."</td>
                                        <td class='center hidden-phone'>".$data['gst']."</td>
                                        <td><a href='product-edit.php?id=$data[id]'><button class='btn btn-primary btn-
xs'><i class='fa fa-pencil'></i></button></a></td>
                                            <td><a href='product-delete.php?id=$data[id]' onclick='return ondelete()'><button
class='btn btn-danger btn-xs'><i class='fa fa-trash-o '></i></button></a></td>
                                        </tr>";
                            }

```

```

        } else {
            echo "No data here";
        }

        ?>
<script type="text/javascript">
    function ondelete() {
        return confirm('Are you sure you want to delete this entry?');
    }
</script>

</tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
            <a href="view-products.php#" class="go-top">
                <i class="fa fa-angle-up"></i>
            </a>
        </div>
    </footer>
<!--footer end-->
</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script type="text/javascript">

```



```

/* Formating function for row details */
function fnFormatDetails(oTable, nTr) {
    var aData = oTable.fnGetData(nTr);
    var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
    sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] + '</td></tr>';
    sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
    sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
    sOut += '</table>';

    return sOut;
}

$(document).ready(function() {
    /*
     * Insert a 'details' column to the table
     */
    var nCloneTh = document.createElement('th');
    var nCloneTd = document.createElement('td');
    nCloneTd.innerHTML = '';
    nCloneTd.className = "center";

    $('#hidden-table-info thead tr').each(function() {
        this.insertBefore(nCloneTh, this.childNodes[0]);
    });

    $('#hidden-table-info tbody tr').each(function() {
        this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
    });

    /*
     * Initialise DataTables, with no sorting on the 'details' column
     */
    var oTable = $('#hidden-table-info').dataTable({
        "aoColumnDefs": [{
            "bSortable": false,
            "aTargets": [0]
        }],
        "aaSorting": [
            [1, 'asc']
        ]
    });

    /* Add event listener for opening and closing details
     * Note that the indicator for showing which row is open is not controlled by DataTables,
     * rather it is done here
     */
    $('#hidden-table-info tbody td img').live('click', function() {
        var nTr = $(this).parents('tr')[0];
        if (oTable.fnIsOpen(nTr)) {
            /* This row is already open - close it */
            this.src = "lib/advanced-datatable/media/images/details_open.png";
            oTable.fnClose(nTr);
        } else {
            /* Open this row */

```

```

        this.src = "lib/advanced-datatable/images/details_close.png";
        oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr), 'details');
    }
    });
    });
</script>
</body>

</html>

```

add-department.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

if (isset($_POST['save_department'])) {

    $department_name=$_POST['department_name'];
    $hod=$_POST['hod'];

    $query= mysqli_query($conn,"INSERT
    INTO department(department_name,hod)VALUES('$department_name','$hod')") or
    die(mysqli_error($conn));
    if ($query) {
        header('location:view-department.php');
    }
}

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta name="description" content="">
<meta name="author" content="Dashboard">
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">

```

```
<title>RDNC Service Portal - Purchase</title>
```

```
<!-- Favicons -->
```

```
<link href="img/logo.png" rel="icon">
```

```
<link href="img/logo.png" rel="apple-touch-icon">
```

```
<!-- Bootstrap core CSS -->
```

```
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
<!--external css-->
```

```
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
```

```
<link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
```

```
<link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
```

```
<!-- Custom styles for this template -->
```

```
<link href="css/style.css" rel="stylesheet">
```

```
<link href="css/style-responsive.css" rel="stylesheet">
```

```
<script src="lib/chart-master/Chart.js"></script>
```

```
</head>
```

```
<body>
```

```
<section id="container">
```

```
<?php include("include/menu.php");?>
```

```
<!-- *** MAIN CONTENT ***** -->
```

```
<section id="main-content">
```

```
<section class="wrapper">
```

```
<h3><i class="fa fa-angle-right"></i> Add New Department</h3>
```

```
<!-- BASIC FORM ELELEMNTS -->
```

```
<div class="row mt">
```

```
<div class="col-lg-12">
```

```
<div class="form-panel">
```

```
<h4 class="mb"><i class="fa fa-angle-right"></i> New Department Information</h4>
```

```
<form class="form-horizontal style-form" method="POST">
```

```
<div class="form-group">
```

```
<label class="col-sm-2 col-sm-2 control-label">Department Name</label>
```

```
<div class="col-sm-10">
```

```
<input type="text" class="form-control" name="department_name" required>
```

```
</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label class="col-sm-2 col-sm-2 control-label">H.O.D.</label>
```

```
<div class="col-sm-10">
```

```
<input type="text" class="form-control" name="hod" required>
```

```
</div>
```

```
</div>
```

```
<div class="form-group" align="center">
```

```
<div class="col-sm-10">
```

```
<input type="submit" name="save_department" class="btn btn-theme " value="Save">
```

```
</div>
```

```
</div>
```

```

        </form>
    </div>
</div>
<!-- col-lg-12-->
</div>
<!-- /row -->

</section>
<!-- /wrapper -->
</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
            <a href="advanced_table.html#" class="go-top">
                <i class="fa fa-angle-up"></i>
            </a>
        </div>
    </footer>
</section>

<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>
<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>

<script type="application/javascript">
$(document).ready(function() {
    $("#date-popover").popover({
        html: true,
        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });
});

```

```

});

$("#my-calendar").zabuto_calendar({
  action: function() {
    return myDateFunction(this.id, false);
  },
  action_nav: function() {
    return myNavFunction(this.id);
  },
  ajax: {
    url: "show_data.php?action=1",
    modal: true
  },
  legend: [{
    type: "text",
    label: "Special event",
    badge: "00"
  },
  {
    type: "block",
    label: "Regular event",
  }
]
});
});

function myNavFunction(id) {
  $("#date-popover").hide();
  var nav = $("#" + id).data("navigation");
  var to = $("#" + id).data("to");
  console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

```

view-department.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
  header('location:index.php');
}
$count=0;
$query = mysqli_query($conn,"SELECT * FROM department");
$rows = mysqli_num_rows($query);

```

```

if ($rows!=0) {

?>

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta name="description" content="">
  <meta name="author" content="Dashboard">
  <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">
  <title>RDNC Service Portal - Purchase</title>

  <!-- Favicons -->
  <link href="img/logo.png" rel="icon">
  <link href="img/logo.png" rel="apple-touch-icon">

  <!-- Bootstrap core CSS -->
  <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
  <!--external css-->
  <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
  <link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />
  <link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
  <link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
  <!-- Custom styles for this template -->
  <link href="css/style.css" rel="stylesheet">
  <link href="css/style-responsive.css" rel="stylesheet">

  <!-- =====
  Template Name: Dashio
  Template URL: https://templatemag.com/dashio-bootstrap-admin-template/
  Author: TemplateMag.com
  License: https://templatemag.com/license/
  ===== -->
</head>

<body>
  <section id="container">
    <!--
    *****
    *****

    TOP BAR CONTENT & NOTIFICATIONS
    *****
    ***** -->

    <!--header start-->
    <header class="header black-bg">
      <div class="sidebar-toggle-box">
        <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
      </div>
    <!--logo start-->

```

```

        <a href="index.html" class="logo"></a>
    <!--logo end-->

```

```

    <div class="top-menu">
        <ul class="nav pull-right top-menu">
            <li><a class="logout" href="login.html">Logout</a></li>
        </ul>
    </div>
</header>
<!--header end-->

```

```

<?php include("include/menu.php")?>
<!--MAIN CONTENT -->

```

```

<section id="main-content">
    <section class="wrapper">
        <h3><i class="fa fa-angle-right"></i> View All Departments </h3>
        <div class="row mb">
            <!-- page start-->
            <div class="content-panel">
                <div class="adv-table">
                    <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
                        <thead>
                            <tr>
                                <th>Sr.No.</th>
                                <th>Department No.</th>
                                <th>Department Name</th>
                                <th class="hidden-phone">H.O.D.</th>
                                <th class="hidden-phone">Edit</th>
                                <th class="hidden-phone">Delete</th>
                                <!-- <th class="hidden-phone">Sub Count</th> -->
                            </tr>
                        </thead>
                        <tbody>
                            <?php
                                while ($data=mysqli_fetch_assoc($query)) {
                                    $count++;

                                    echo "
                                        <tr class='gradeC'>
                                            <td>".$count."</td>
                                            <td>DEPT00".$data['id']."</td>
                                            <td>".$data['department_name']."</td>
                                            <td class='hidden-phone'>".$data['hod']."</td>
                                            <td><a href='department-edit.php?id=$data[id]'><button class='btn btn-primary
btn-xs'><i class='fa fa-pencil'></i></button></a></td>
                                            <td><a href='department-delete.php?id=$data[id]' onclick='return
ondelete()'><button class='btn btn-danger btn-xs'><i class='fa fa-trash-o '></i></button></a></td>
                                        </tr>";
                                }
                            </tbody>
                        </table>
                    </div>
                </div>
            </div>
        </div>
    </section>
</section>

```

```

        }

        } else {
            echo "No data here";
        }

        ?>
<script type="text/javascript">
    function ondelete() {
        return confirm('Are you sure you want to delete this entry?');
    }
</script>

</tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
    <div class="text-center">
        <p>
            &copy; Copyrights All Rights Reserved
        </p>
        <div class="credits">

            </div>
        <a href="view-products.php#" class="go-top">
            <i class="fa fa-angle-up"></i>
        </a>
    </div>
</footer>
<!--footer end-->
</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>

```



```

<!--script for this page-->
<script type="text/javascript">
/* Formating function for row details */
function fnFormatDetails(oTable, nTr) {
    var aData = oTable.fnGetData(nTr);
    var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
    sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] + '</td></tr>';
    sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
    sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
    sOut += '</table>';

    return sOut;
}

$(document).ready(function() {
/*
 * Insert a 'details' column to the table
 */
var nCloneTh = document.createElement('th');
var nCloneTd = document.createElement('td');
nCloneTd.innerHTML = '';
nCloneTd.className = "center";

$('#hidden-table-info thead tr').each(function() {
    this.insertBefore(nCloneTh, this.childNodes[0]);
});

$('#hidden-table-info tbody tr').each(function() {
    this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
});

/*
 * Initialise DataTables, with no sorting on the 'details' column
 */
var oTable = $('#hidden-table-info').dataTable({
    "aoColumnDefs": [{
        "bSortable": false,
        "aTargets": [0]
    }],
    "aaSorting": [
        [1, 'asc']
    ]
});

/* Add event listener for opening and closing details
 * Note that the indicator for showing which row is open is not controlled by DataTables,
 * rather it is done here
 */
$('#hidden-table-info tbody td img').live('click', function() {
    var nTr = $(this).parents('tr')[0];
    if (oTable.fnIsOpen(nTr)) {
        /* This row is already open - close it */
        this.src = "lib/advanced-datatable/media/images/details_open.png";
        oTable.fnClose(nTr);
    }
}

```

```

    } else {
        /* Open this row */
        this.src = "lib/advanced-datatable/images/details_close.png";
        oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr), 'details');
    }
    });
    });
</script>
</body>

</html>

```

view-department.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}
$count=0;
$query = mysqli_query($conn,"SELECT * FROM department");
$rows = mysqli_num_rows($query);
if ($rows!=0) {

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta name="description" content="">
    <meta name="author" content="Dashboard">
    <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
    <title>RDNC Service Portal - Purchase</title>

    <!-- Favicons -->
    <link href="img/logo.png" rel="icon">
    <link href="img/logo.png" rel="apple-touch-icon">

    <!-- Bootstrap core CSS -->
    <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <!--external css-->
    <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
    <link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />

```

```

<link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
<link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">

<!-- =====
Template Name: Dashio
Template URL: https://templatemag.com/dashio-bootstrap-admin-template/
Author: TemplateMag.com
License: https://templatemag.com/license/
===== -->
</head>

<body>
<section id="container">
<!--
*****
*****

TOP BAR CONTENT & NOTIFICATIONS
*****
***** -->

<!--header start-->
<header class="header black-bg">
<div class="sidebar-toggle-box">
<div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
</div>
<!--logo start-->
<a href="index.html" class="logo"></a>
<!--logo end-->

<div class="top-menu">
<ul class="nav pull-right top-menu">
<li><a class="logout" href="login.html">Logout</a></li>
</ul>
</div>
</header>
<!--header end-->

<?php include("include/menu.php")?>
<!--MAIN CONTENT -->

<section id="main-content">
<section class="wrapper">
<h3><i class="fa fa-angle-right"></i> View All Departments </h3>
<div class="row mb">
<!-- page start-->
<div class="content-panel">
<div class="adv-table">

```

```

        <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
    <thead>
        <tr>
            <th>Sr.No.</th>
            <th>Department No.</th>
            <th>Department Name</th>
            <th class="hidden-phone">H.O.D.</th>
            <th class="hidden-phone">Edit</th>
            <th class="hidden-phone">Delete</th>
            <!-- <th class="hidden-phone">Sub Count</th> -->
        </tr>
    </thead>
    <tbody>
        <?php
            while ($data=mysqli_fetch_assoc($query)) {
                $count++;

                echo "
                    <tr class='gradeC'>
                        <td>".$count."</td>
                        <td>DEPT00".$data['id']."</td>
                        <td>".$data['department_name']."</td>
                        <td class='hidden-phone'>".$data['hod']."</td>
                        <td><a href='department-edit.php?id=$data[id]'><button class='btn btn-primary
btn-xs'><i class='fa fa-pencil'></i></button></a></td>
                        <td><a href='department-delete.php?id=$data[id]' onclick='return
ondelete()'><button class='btn btn-danger btn-xs'><i class='fa fa-trash-o '></i></button></a></td>
                    </tr>";
                }

                } else {
                    echo "No data here";
                }

            ?>
        <script type="text/javascript">
            function ondelete() {
                return confirm('Are you sure you want to delete this entry?');
            }
        </script>

    </tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->

```

```

<!--footer start-->
<footer class="site-footer">
  <div class="text-center">
    <p>
      &copy; Copyrights All Rights Reserved
    </p>
    <div class="credits">

      </div>
      <a href="view-products.php#" class="go-top">
        <i class="fa fa-angle-up"></i>
      </a>
    </div>
  </footer>
<!--footer end-->
</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script type="text/javascript">
  /* Formating function for row details */
  function fnFormatDetails(oTable, nTr) {
    var aData = oTable.fnGetData(nTr);
    var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
    sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] + '</td></tr>';
    sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
    sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
    sOut += '</table>';

    return sOut;
  }

  $(document).ready(function() {
    /*
     * Insert a 'details' column to the table
     */
    var nCloneTh = document.createElement('th');
    var nCloneTd = document.createElement('td');
    nCloneTd.innerHTML = '';
    nCloneTd.className = "center";

    $('#hidden-table-info thead tr').each(function() {
      this.insertBefore(nCloneTh, this.childNodes[0]);
    });
  });

```

```

});

$('#hidden-table-info tbody tr').each(function() {
    this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
});

/*
 * Initialise DataTables, with no sorting on the 'details' column
 */
var oTable = $('#hidden-table-info').dataTable({
    "aoColumnDefs": [{
        "bSortable": false,
        "aTargets": [0]
    }],
    "aaSorting": [
        [1, 'asc']
    ]
});

/* Add event listener for opening and closing details
 * Note that the indicator for showing which row is open is not controlled by DataTables,
 * rather it is done here
 */
$('#hidden-table-info tbody td img').live('click', function() {
    var nTr = $(this).parents('tr')[0];
    if (oTable.fnIsOpen(nTr)) {
        /* This row is already open - close it */
        this.src = "lib/advanced-datatable/media/images/details_open.png";
        oTable.fnClose(nTr);
    } else {
        /* Open this row */
        this.src = "lib/advanced-datatable/media/images/details_close.png";
        oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr), 'details');
    }
});
});
</script>
</body>

</html>

```

add.staff.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

```

```
}
```

```
if (isset($_POST['save_department'])) {
```

```
    $staff_name=$_POST['staff_name'];
```

```
    $staff_head=$_POST['staff_head'];
```

```
    $query= mysqli_query($conn,"INSERT  
INTO staff(staff_name,staff_head)VALUES('$staff_name','$staff_head')") or  
die(mysqli_error($conn));
```

```
    if ($query) {  
        header('location:view-staff.php');  
    }
```

```
}
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
    <meta charset="utf-8">
```

```
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
    <meta name="description" content="">
```

```
    <meta name="author" content="Dashboard">
```

```
    <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,  
Fluid, Retina">
```

```
    <title>RDNC Service Portal - Purchase</title>
```

```
    <!-- Favicons -->
```

```
    <link href="img/logo.png" rel="icon">
```

```
    <link href="img/logo.png" rel="apple-touch-icon">
```

```
    <!-- Bootstrap core CSS -->
```

```
    <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
    <!--external css-->
```

```
    <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
```

```
    <link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
```

```
    <link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
```

```
    <!-- Custom styles for this template -->
```

```
    <link href="css/style.css" rel="stylesheet">
```

```
    <link href="css/style-responsive.css" rel="stylesheet">
```

```
    <script src="lib/chart-master/Chart.js"></script>
```

```
</head>
```

```
<body>
```

```
    <section id="container">
```

```

<?php include("include/menu.php");?>
<!-- *** MAIN CONTENT ***** -->
<section id="main-content">
<section class="wrapper">
<h3><i class="fa fa-angle-right"></i> Add New Staff</h3>
<!-- BASIC FORM ELELEMNTS -->
<div class="row mt">
<div class="col-lg-12">
<div class="form-panel">
<h4 class="mb"><i class="fa fa-angle-right"></i> New Staff Information</h4>
<form class="form-horizontal style-form" method="POST">
<div class="form-group">
<label class="col-sm-2 col-sm-2 control-label">Staff Name</label>
<div class="col-sm-10">
<input type="text" class="form-control" name="staff_name" required>
</div>
</div>
<div class="form-group">
<label class="col-sm-2 col-sm-2 control-label">Staff's Head</label>
<div class="col-sm-10">
<input type="text" class="form-control" name="staff_head" required>
</div>
</div>

<div class="form-group" align="center">
<div class="col-sm-10">
<input type="submit" name="save_department" class="btn btn-theme " value="Save">
</div>
</div>

</form>
</div>
</div>
<!-- col-lg-12-->
</div>
<!-- /row -->

</section>
<!-- /wrapper -->
</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
<div class="text-center">
<p>
&copy; Copyrights All Rights Reserved
</p>
<div class="credits">

</div>
<a href="advanced_table.html#" class="go-top">

```



```
        <i class="fa fa-angle-up"></i>
      </a>
    </div>
  </footer>
</section>
```

```
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
```

```
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>
<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
```

```
<script type="application/javascript">
$(document).ready(function() {
  $("#date-popover").popover({
    html: true,
    trigger: "manual"
  });
  $("#date-popover").hide();
  $("#date-popover").click(function(e) {
    $(this).hide();
  });

  $("#my-calendar").zabuto_calendar({
    action: function() {
      return myDateFunction(this.id, false);
    },
    action_nav: function() {
      return myNavFunction(this.id);
    },
    ajax: {
      url: "show_data.php?action=1",
      modal: true
    },
    legend: [{
      type: "text",
      label: "Special event",
      badge: "00"
    },
    {
      type: "block",
      label: "Regular event",
    }
  ]
})
```

```

    });
});

function myNavFunction(id) {
    $("#date-popover").hide();
    var nav = $("#" + id).data("navigation");
    var to = $("#" + id).data("to");
    console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

```

```
</html>
```

view-staff.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}
$count=0;
$query = mysqli_query($conn,"SELECT * FROM staff");
$rows = mysqli_num_rows($query);
if ($rows!=0) {

?>

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta name="description" content="">
<meta name="author" content="Dashboard">
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
<title>RDNC Service Portal - Purchase</title>

<!-- Favicons -->
<link href="img/logo.png" rel="icon">
<link href="img/logo.png" rel="apple-touch-icon">

<!-- Bootstrap core CSS -->
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
<!--external css-->
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />

```

```

<link href="lib/advanced-datatable/css/demo_page.css" rel="stylesheet" />
<link href="lib/advanced-datatable/css/demo_table.css" rel="stylesheet" />
<link rel="stylesheet" href="lib/advanced-datatable/css/DT_bootstrap.css" />
<!-- Custom styles for this template -->
<link href="css/style.css" rel="stylesheet">
<link href="css/style-responsive.css" rel="stylesheet">

</head>

<body>
  <section id="container">
    <!--
    *****
    *****
    TOP BAR CONTENT & NOTIFICATIONS
    *****
    ***** -->

    <!--header start-->
    <header class="header black-bg">
      <div class="sidebar-toggle-box">
        <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle
Navigation"></div>
      </div>
      <!--logo start-->
      <a href="index.html" class="logo"></a>
      <!--logo end-->

      <div class="top-menu">
        <ul class="nav pull-right top-menu">
          <li><a class="logout" href="login.html">Logout</a></li>
        </ul>
      </div>
    </header>
    <!--header end-->

    <?php include("include/menu.php")?>
    <!--MAIN CONTENT -->

    <section id="main-content">
      <section class="wrapper">
        <h3><i class="fa fa-angle-right"></i> View All Staff </h3>
        <div class="row mb">
          <!-- page start-->
          <div class="content-panel">
            <div class="adv-table">
              <table cellpadding="0" cellspacing="0" border="0" class="display table table-bordered"
id="hidden-table-info">
                <thead>
                  <tr>

```

```

        <th>Sr.No.</th>
        <th>Staff No.</th>
        <th>Staff Name</th>
        <th class="hidden-phone">Staff Head</th>
        <th class="hidden-phone">Edit</th>
        <th class="hidden-phone">Delete</th>

    </tr>
</thead>
<tbody>
<?php
    while ($data=mysqli_fetch_assoc($query)) {
        $count++;

        echo "
            <tr class='gradeC'>
                <td>".$count."</td>
                <td>STAFF00".$data['id']."</td>
                <td>".$data['staff_name']."</td>
                <td class='hidden-phone'>".$data['staff_head']."</td>
                <td><a href='staff-edit.php?id=$data[id]'><button class='btn btn-primary btn-xs'><i
class='fa fa-pencil'></i></button></a></td>
                <td><a href='staff-delete.php?id=$data[id]' onclick='return ondelete()'><button
class='btn btn-danger btn-xs'><i class='fa fa-trash-o'></i></button></a></td>
            </tr>";
        }

        } else {
            echo "No data here";
        }

    ?>
<script type="text/javascript">
    function ondelete() {
        return confirm('Are you sure you want to delete this entry?');
    }
</script>

</tbody>
</table>
</div>
</div>
<!-- page end-->
</div>
<!-- /row -->
</section>
<!-- /wrapper -->
</section>
<!-- /MAIN CONTENT -->
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
<div class="text-center">
<p>

```

```

    &copy; Copyrights All Rights Reserved
  </p>
  <div class="credits">

  </div>
  <a href="view-products.php#" class="go-top">
    <i class="fa fa-angle-up"></i>
  </a>
</div>
</footer>
<!--footer end-->
</section>
<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script type="text/javascript" language="javascript" src="lib/advanced-
datatable/js/jquery.dataTables.js"></script>
<script type="text/javascript" src="lib/advanced-datatable/js/DT_bootstrap.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script type="text/javascript">
/* Formating function for row details */
function fnFormatDetails(oTable, nTr) {
  var aData = oTable.fnGetData(nTr);
  var sOut = '<table cellpadding="5" cellspacing="0" border="0" style="padding-left:50px;">';
  sOut += '<tr><td>Rendering engine:</td><td>' + aData[1] + ' ' + aData[4] + '</td></tr>';
  sOut += '<tr><td>Link to source:</td><td>Could provide a link here</td></tr>';
  sOut += '<tr><td>Extra info:</td><td>And any further details here (images etc)</td></tr>';
  sOut += '</table>';

  return sOut;
}

$(document).ready(function() {
/*
 * Insert a 'details' column to the table
 */
var nCloneTh = document.createElement('th');
var nCloneTd = document.createElement('td');
nCloneTd.innerHTML = '';
nCloneTd.className = "center";

$('#hidden-table-info thead tr').each(function() {
  this.insertBefore(nCloneTh, this.childNodes[0]);
});

$('#hidden-table-info tbody tr').each(function() {
  this.insertBefore(nCloneTd.cloneNode(true), this.childNodes[0]);
});

```

```

});

/*
 * Initialise DataTables, with no sorting on the 'details' column
 */
var oTable = $('#hidden-table-info').dataTable({
    "aoColumnDefs": [{
        "bSortable": false,
        "aTargets": [0]
    }],
    "aaSorting": [
        [1, 'asc']
    ]
});

/* Add event listener for opening and closing details
 * Note that the indicator for showing which row is open is not controlled by DataTables,
 * rather it is done here
 */
$('#hidden-table-info tbody td img').live('click', function() {
    var nTr = $(this).parents('tr')[0];
    if (oTable.fnIsOpen(nTr)) {
        /* This row is already open - close it */
        this.src = "lib/advanced-datatable/media/images/details_open.png";
        oTable.fnClose(nTr);
    } else {
        /* Open this row */
        this.src = "lib/advanced-datatable/media/images/details_close.png";
        oTable.fnOpen(nTr, fnFormatDetails(oTable, nTr, 'details'));
    }
});
});
</script>
</body>

</html>

```

accountant-dashboard.php

```

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

?>

```

```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta name="description" content="">
  <meta name="author" content="Dashboard">
  <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
  <title>RDNC Service Portal - Purchase</title>

  <!-- Favicons -->
  <link href="img/logo.png" rel="icon">
  <link href="img/logo.png" rel="apple-touch-icon">

  <!-- Bootstrap core CSS -->
  <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
  <!--external css-->
  <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
  <link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
  <link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
  <!-- Custom styles for this template -->
  <link href="css/style.css" rel="stylesheet">
  <link href="css/style-responsive.css" rel="stylesheet">
  <script src="lib/chart-master/Chart.js"></script>

</head>

<body>
  <section id="container">

    <?php include("include/acc-menu.php");?>
    <!-- *** MAIN CONTENT ***** -->
    <section id="main-content">
      <section class="wrapper">
        <h3><i class="fa fa-angle-right"></i> Accountant Dashboard </h3>
        <div class="row mb">
          <!-- page start-->
          <div class="">

            <div class="col-md-4 mb">
              <!-- WHITE PANEL - TOP USER -->
              <div class="green-panel pn">
                <div class="green-header">
                  <h5>Total Parties</h5>
                </div>
              <?php
                $party_query=mysqli_query($conn,"SELECT * FROM party");
                $party_num_rows=mysqli_num_rows($party_query);

              ?>
            </div>
          </div>
        </div>
      </section>
    </section>
  </body>
</html>

```

```

        <div class="row">
            <div class="col-md-12">
                <h1 style="color: #fff;font-size: 100px"><?php echo $party_num_rows;?></h1>
            </div>
        </div>
    </div>
    <div class="col-md-4 mb">
        <!-- WHITE PANEL - TOP USER -->
        <a href="acc-po.php">
            <div class="darkblue-panel pn">
                <div class="darkblue-header">
                    <h5>Purchase Orders</h5>
                </div>
                <?php
                    $purchase_query=mysqli_query($conn,"SELECT * FROM purchase");
                    $purchase_num_rows=mysqli_num_rows($purchase_query);

                ?>
                <div class="row">
                    <div class="col-md-12">
                        <h1 style="color: #fff;font-size: 100px"><?php echo $purchase_num_rows;?></h1>
                    </div>
                </div>
            </a>
        </div>
        <div class="col-md-4 mb">
            <!-- WHITE PANEL - TOP USER -->
            <div class="grey-panel pn donut-chart">
                <div class="grey-header">
                    <h5>Total Products</h5>
                </div>
                <?php
                    $product_query=mysqli_query($conn,"SELECT * FROM product");
                    $product_num_rows=mysqli_num_rows($product_query);

                ?>
                <div class="row">
                    <div class="col-md-12">
                        <h1 style="font-size: 100px;"><?php echo $product_num_rows;?></h1>
                    </div>
                </div>
            </div>
        </div>
    </div>
</section>
</section>
<!--main content end-->
<!--footer start-->
<!-- <footer class="site-footer">

```



```

<div class="text-center">
  <p>
    &copy; Copyrights All Rights Reserved
  </p>
  <div class="credits">

    </div>
    <a href="advanced_table.html#" class="go-top">
      <i class="fa fa-angle-up"></i>
    </a>
  </div>
</footer> -->
</section>

<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>
<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
<script type="text/javascript">
  $(document).ready(function() {
    var unique_id = $.gritter.add({
      // (string | mandatory) the heading of the notification
      title: 'Welcome <?php echo $user; ?>',
      // (string | mandatory) the text inside the notification
      text: 'Hover me to enable the Close Button. You can hide the left sidebar clicking on the button
next to the logo.',
      // (string | optional) the image to display on the left
      image: 'img/ui-sam.jpg',
      // (bool | optional) if you want it to fade out on its own or just sit there
      sticky: false,
      // (int | optional) the time you want it to be alive for before fading out
      time: 8000,
      // (string | optional) the class name you want to apply to that specific message
      class_name: 'my-sticky-class'
    });

    return false;
  });
</script>
<script type="application/javascript">
  $(document).ready(function() {
    $("#date-popover").popover({
      html: true,

```

```

        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });

    $("#my-calendar").zabuto_calendar({
        action: function() {
            return myDateFunction(this.id, false);
        },
        action_nav: function() {
            return myNavFunction(this.id);
        },
        ajax: {
            url: "show_data.php?action=1",
            modal: true
        },
        legend: [{
            type: "text",
            label: "Special event",
            badge: "00"
        },
        {
            type: "block",
            label: "Regular event",
        }
    ]
    });
});

function myNavFunction(id) {
    $("#date-popover").hide();
    var nav = $("#" + id).data("navigation");
    var to = $("#" + id).data("to");
    console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

acc-po.php

<?php
session_start();
include('connect.php');

$user=$_SESSION['username'];

if ($user) {

} else {
    header('location:index.php');
}

```

```
}
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<meta name="description" content="">
```

```
<meta name="author" content="Dashboard">
```

```
<meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive, Fluid, Retina">
```

```
<title>RDNC Service Portal - Purchase</title>
```

```
<!-- Favicons -->
```

```
<link href="img/logo.png" rel="icon">
```

```
<link href="img/logo.png" rel="apple-touch-icon">
```

```
<!-- Bootstrap core CSS -->
```

```
<link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
<!--external css-->
```

```
<link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
```

```
<link rel="stylesheet" type="text/css" href="css/zabuto_calendar.css">
```

```
<link rel="stylesheet" type="text/css" href="lib/gritter/css/jquery.gritter.css" />
```

```
<!-- Custom styles for this template -->
```

```
<link href="css/style.css" rel="stylesheet">
```

```
<link href="css/style-responsive.css" rel="stylesheet">
```

```
<script src="lib/chart-master/Chart.js"></script>
```

```
</head>
```

```
<body>
```

```
<section id="container">
```

```
<?php include("include/acc-menu.php");?>
```

```
<!-- *** MAIN CONTENT ***** -->
```

```
<section id="main-content">
```

```
<section class="wrapper">
```

```
<h3><i class="fa fa-angle-right"></i> Accountant Dashboard </h3>
```

```
<div class="row mb">
```

```
<!-- page start-->
```

```
<div class="">
```

```
<div class="col-md-4 mb">
```

```
<!-- WHITE PANEL - TOP USER -->
```

```
<div class="green-panel pn">
```

```
<div class="green-header">
```

```
<h5>Total Parties</h5>
```

```
</div>
```

```
<?php
```

```
$party_query=mysqli_query($conn,"SELECT * FROM party");
$party_num_rows=mysqli_num_rows($party_query);

?>


<div class="row">
    <div class="col-md-12">
        <h1 style="color: #fff;font-size: 100px"><?php echo $party_num_rows;?></h1>
    </div>
</div>
</div>
<div class="col-md-4 mb">
<!-- WHITE PANEL - TOP USER -->
<a href="acc-po.php">
<div class="darkblue-panel pn">
    <div class="darkblue-header">
        <h5>Purchase Orders</h5>
    </div>
    <?php
        $purchase_query=mysqli_query($conn,"SELECT * FROM purchase");
        $purchase_num_rows=mysqli_num_rows($purchase_query);

?>
    <div class="row">
        <div class="col-md-12">
            <h1 style="color: #fff;font-size: 100px"><?php echo $purchase_num_rows;?></h1>
        </div>
    </div>
</a>
</div>
<div class="col-md-4 mb">
<!-- WHITE PANEL - TOP USER -->
<div class="grey-panel pn donut-chart">
    <div class="grey-header">
        <h5>Total Products</h5>
    </div>
    <?php
        $product_query=mysqli_query($conn,"SELECT * FROM product");
        $product_num_rows=mysqli_num_rows($product_query);

?>
    <div class="row">
        <div class="col-md-12">
            <h1 style="font-size: 100px;"><?php echo $product_num_rows;?></h1>
        </div>
    </div>
</div>
</div>
</div>
</div>
</section>
```

```

</section>
<!--main content end-->
<!--footer start-->
<!-- <footer class="site-footer">
<div class="text-center">
<p>
&copy; Copyrights All Rights Reserved
</p>
<div class="credits">

</div>
<a href="advanced_table.html#" class="go-top">
<i class="fa fa-angle-up"></i>
</a>
</div>
</footer> -->
</section>

<!-- js placed at the end of the document so the pages load faster -->
<script src="lib/jquery/jquery.min.js"></script>

<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<script src="lib/jquery.sparkline.js"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<script type="text/javascript" src="lib/gritter/js/jquery.gritter.js"></script>
<script type="text/javascript" src="lib/gritter-conf.js"></script>
<!--script for this page-->
<script src="lib/sparkline-chart.js"></script>
<script src="lib/zabuto_calendar.js"></script>
<script type="text/javascript">
$(document).ready(function() {
var unique_id = $.gritter.add({
// (string | mandatory) the heading of the notification
title: 'Welcome <?php echo $user; ?>',
// (string | mandatory) the text inside the notification
text: 'Hover me to enable the Close Button. You can hide the left sidebar clicking on the button
next to the logo.',
// (string | optional) the image to display on the left
image: 'img/ui-sam.jpg',
// (bool | optional) if you want it to fade out on its own or just sit there
sticky: false,
// (int | optional) the time you want it to be alive for before fading out
time: 8000,
// (string | optional) the class name you want to apply to that specific message
class_name: 'my-sticky-class'
});

return false;
});
</script>

```

```

<script type="application/javascript">
$(document).ready(function() {
    $("#date-popover").popover({
        html: true,
        trigger: "manual"
    });
    $("#date-popover").hide();
    $("#date-popover").click(function(e) {
        $(this).hide();
    });

    $("#my-calendar").zabuto_calendar({
        action: function() {
            return myDateFunction(this.id, false);
        },
        action_nav: function() {
            return myNavFunction(this.id);
        },
        ajax: {
            url: "show_data.php?action=1",
            modal: true
        },
        legend: [{
            type: "text",
            label: "Special event",
            badge: "00"
        },
        {
            type: "block",
            label: "Regular event",
        }
    ]
    });
});

function myNavFunction(id) {
    $("#date-popover").hide();
    var nav = $("#" + id).data("navigation");
    var to = $("#" + id).data("to");
    console.log('nav ' + nav + ' to: ' + to.month + '/' + to.year);
}
</script>
</body>

</html>

```

acc-menu.php

```

<?php
include('connect.php');
$q=mysqli_query($conn,"SELECT MAX(id) as id FROM purchase ")or die(mysqli_error());

while($f=mysqli_fetch_array($q)){

```

```
$poid=$f['id'];  
}
```

```
?>
```

```
<!--header start-->  
<header class="header black-bg">  
  <div class="sidebar-toggle-box">  
    <div class="fa fa-bars tooltips" data-placement="right" data-original-title="Toggle  
Navigation"></div>  
  </div>  
  <!--logo start-->  
  <a href="index.php" class="logo" ></a>  
  <!--logo end-->  
  
  <div class="top-menu">  
    <ul class="nav pull-right top-menu">  
      <li><a class="logout" href="logout.php">Logout</a></li>  
    </ul>  
  </div>  
</header>  
<!--header end-->  
<!-- ***** MAIN SIDEBAR MENU -->  
  
<!--sidebar start-->  
<aside>  
  <div id="sidebar" class="nav-collapse ">  
    <!-- sidebar menu start-->  
    <ul class="sidebar-menu" id="nav-accordion">  
      <p class="centered"><a href="profile.php"></a></p>  
      <h5 class="centered"><?php echo $user;?></h5>  
      <li class="mt">  
        <a href="account-dashboard.php">  
          <i class="fa fa-dashboard"></i>  
          <span>DASHBOARD</span>  
        </a>  
      </li>  
  
      <li>  
        <a href="acc-po.php">  
          <i class="fa fa-eye"></i>  
          <span>View All PO</span>  
        </a>  
      </li>  
  
      <li>  
        <a href="acc-profile.php">  
          <i class="fa fa-user"></i>  
          <span>Profile</span>  
        </a>
```

```
        </li>
    </ul>
    <!-- sidebar menu end-->
</div>
</aside>
<!--sidebar end-->
```

profile.php

```
<?php
session_start();
include('connect.php');
```

```
$user=$_SESSION['username'];
```

```
if ($user) {
```

```
    } else {
        header('location:index.php');
    }
}
```

```
?>
```

```
<!DOCTYPE html>
<html lang="en">
```

```
<head>
```

```
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta name="description" content="">
    <meta name="author" content="Dashboard">
    <meta name="keyword" content="Dashboard, Bootstrap, Admin, Template, Theme, Responsive,
Fluid, Retina">
    <title>RDNC Service Portal - Purchase</title>
```

```
<!-- Favicons -->
```

```
    <link href="img/logo.png" rel="icon">
```

```
    <link href="img/logo.png" rel="apple-touch-icon">
```

```
<!-- Bootstrap core CSS -->
```

```
    <link href="lib/bootstrap/css/bootstrap.min.css" rel="stylesheet">
```

```
<!--external css-->
```

```
    <link href="lib/font-awesome/css/font-awesome.css" rel="stylesheet" />
```

```
    <link rel="stylesheet" type="text/css" href="lib/bootstrap-datepicker/css/datepicker.css" />
```

```
    <link rel="stylesheet" type="text/css" href="lib/bootstrap-daterangepicker/daterangepicker.css" />
```

```
<!-- Custom styles for this template -->
```

```
    <link href="css/style.css" rel="stylesheet">
```

```
    <link href="css/style-responsive.css" rel="stylesheet">
```

```
</head>
```

```
<body>
```

```
    <section id="container">
```



```

<?php include("include/menu.php");?>
<!-- *** MAIN CONTENT ***** -->
<section id="main-content">
  <section class="wrapper">
    <h3><i class="fa fa-angle-right"></i>CHANGE PASSWORD</h3>
    <!-- BASIC FORM ELELEMNTS -->
    <div class="row mt">
      <div class="col-lg-12">
        <div class="form-panel">
          <form class="form-horizontal style-form" method="post">
            <div class="form-group">
              <label class="col-sm-1 col-sm-1 control-label"><b>New Password:</b></label>
              <div class="col-sm-2">
                <input type="password" class="form-control">
              </div>
              <label class="col-sm-1 control-label"><b>Re-write Password:</b></label>
              <div class="col-sm-2">
                <input type="password" class="form-control">
              </div>
              <div class="col-sm-2">
                <button class="btn btn-theme">Set New Password</button>
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
    <!-- col-lg-12-->
  </div>
<!-- /row -->

```

```

</section>
<!-- /wrapper -->
</section>
<!--main content end-->
<!--footer start-->
<footer class="site-footer">
  <div class="text-center">
    <p>
      &copy; Copyrights All Rights Reserved
    </p>
    <div class="credits">

      </div>
      <a href="advanced_table.html#" class="go-top">
        <i class="fa fa-angle-up"></i>
      </a>
    </div>
  </footer>
</section>

```

```

<!-- js placed at the end of the document so the pages load faster -->

```

```
<script src="lib/jquery/jquery.min.js"></script>
<script src="lib/bootstrap/js/bootstrap.min.js"></script>
<script class="include" type="text/javascript" src="lib/jquery.dcjaccordion.2.7.js"></script>
<script src="lib/jquery.scrollTo.min.js"></script>
<script src="lib/jquery.nicescroll.js" type="text/javascript"></script>
<!--common script for all pages-->
<script src="lib/common-scripts.js"></script>
<!--script for this page-->
<script src="lib/jquery-ui-1.9.2.custom.min.js"></script>
<script type="text/javascript" src="lib/bootstrap-fileupload/bootstrap-fileupload.js"></script>
<script type="text/javascript" src="lib/bootstrap-datepicker/js/bootstrap-datepicker.js"></script>
<script type="text/javascript" src="lib/bootstrap-daterangepicker/date.js"></script>
<script type="text/javascript" src="lib/bootstrap-daterangepicker/daterangepicker.js"></script>
<script type="text/javascript" src="lib/bootstrap-datetimepicker/js/bootstrap-
datetimepicker.js"></script>
<script type="text/javascript" src="lib/bootstrap-daterangepicker/moment.min.js"></script>
<script type="text/javascript" src="lib/bootstrap-timepicker/js/bootstrap-timepicker.js"></script>
<script src="lib/advanced-form-components.js"></script>
</body>

</html>
```

Chapter 6

TESTING:

Testing is a process of executing a program with the intent of finding an error. Testing is a crucial element of software quality assurance and presents ultimate review of specification, design and coding.

System Testing is an important phase. Testing represents an interesting anomaly for the software. Thus a series of testing are performed for the proposed system before the system is ready for user acceptance testing.

A good test case is one that has a high probability of finding an as undiscovered error. A successful test is one that uncovers an as undiscovered error.

Testing Objectives:

1. Testing is a process of executing a program with the intent of finding an error
2. A good test case is one that has a probability of finding an as yet undiscovered error
3. A successful test is one that uncovers an undiscovered error

Testing Principles:

- All tests should be traceable to end user requirements
- Tests should be planned long before testing begins
- Testing should begin on a small scale and progress towards testing in large
- Exhaustive testing is not possible
- To be most effective testing should be conducted by a independent third party

The primary objective for test case design is to derive a set of tests that has the highest livelihood for uncovering defects in software. To accomplish this objective two different categories of test case design techniques are used. They are

- White box testing.
- Black box testing.

White-box testing:

White box testing focus on the program control structure. Test cases are derived to ensure that all statements in the program have been executed at least once during testing and that all logical conditions have been executed.

Block-box testing:

Black box testing is designed to validate functional requirements without regard to the internal workings of a program. Black box testing mainly focuses on the

information domain of the software, deriving test cases by partitioning input and output in a manner that provides thorough test coverage. Incorrect and missing functions, interface errors, errors in data structures, error in functional logic are the errors falling in this category.

Testing strategies:

A strategy for software testing must accommodate low-level tests that are necessary to verify that all small source code segment has been correctly implemented as well as high-level tests that validate major system functions against customer requirements.

Testing fundamentals:

Testing is a process of executing program with the intent of finding error. A good test case is one that has high probability of finding an undiscovered error. If testing is conducted successfully it uncovers the errors in the software. Testing cannot show the absence of defects, it can only show that software defects present.

Testing Information flow:

Information flow for testing flows the pattern. Two class of input provided to test the process. The software configuration includes a software requirements specification, a design specification and source code.

Test configuration includes test plan and test cases and test tools. Tests are conducted and all the results are evaluated. That is test results are compared with expected results. When erroneous data are uncovered, an error is implied and debugging commences.

Unit testing:

Unit testing is essential for the verification of the code produced during the coding phase and hence the goal is to test the internal logic of the modules. Using the detailed design description as a guide, important paths are tested to uncover errors with in the boundary of the modules. These tests were carried out during the programming stage itself. All units of ViennaSQL were successfully tested.

Integration testing :

Integration testing focuses on unit tested modules and build the program structure that is dictated by the design phase.

System testing:

System testing tests the integration of each module in the system. It also tests to find discrepancies between the system and it's original objective, current specification and system documentation. The primary concern is the compatibility

of individual modules. Entire system is working properly or not will be tested here, and specified path ODBC connection will correct or not, and giving output or not are tested here these verifications and validations are done by giving input values to the system and by comparing with expected output. Top-down testing implementing here.

Acceptance Testing:

This testing is done to verify the readiness of the system for the implementation. Acceptance testing begins when the system is complete. Its purpose is to provide the end user with the confidence that the system is ready for use. It involves planning and execution of functional tests, performance tests and stress tests in order to demonstrate that the implemented system satisfies its requirements.

Tools to special importance during acceptance testing include:

Test coverage Analyzer – records the control paths followed for each test case.

Timing Analyzer – also called a profiler, reports the time spent in various regions of the code are areas to concentrate on to improve system performance.

Coding standards – static analyzers and standard checkers are used to inspect code for deviations from standards and guidelines.

Test Cases:

Test cases are derived to ensure that all statements in the program have been executed at least once during testing and that all logical conditions have been executed.

Using White-Box testing methods, the software engineer can drive test cases that


- Guarantee that logical decisions on their true and false sides.
- Exercise all logical decisions on their true and false sides.
- Execute all loops at their boundaries and within their operational bounds.
- Exercise internal data structure to assure their validity.

The test case specification for system testing has to be submitted for review before system testing commences.


Chapter 7

Output Screens

Log in Page

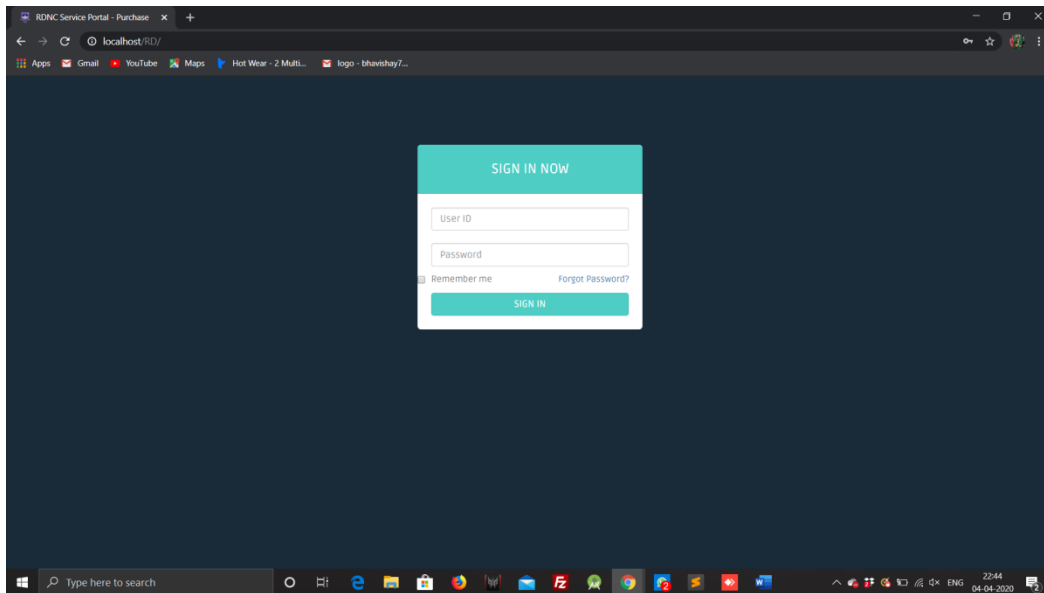

Dashboard

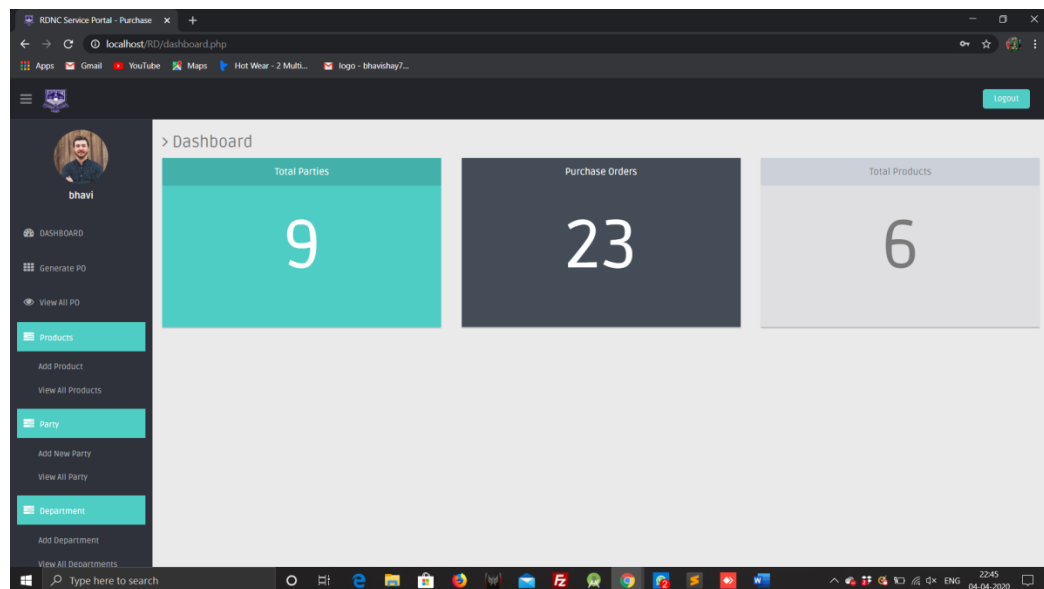

PO Generataion

> PO GENERATION

> PO ENTRY

PO Number: PO Date: Party Name:

Department: Staff:

> Product Details

--Item Name--

#	Item Name	Qty	Rate (per unit)	Disc%	Tax%	Amount	Tax Amount	Discount Amount	Net Amount	Edit	Delete
> Total											
Gross Amount:									0.00		
GST:									0.00		

View All PO

> View All PO

dd-mm-yyyy To dd-mm-yyyy

Select date range

10 records per page

Search:

#	Date	PO Number	Party	Department	Staff	Gross Amount	GST (SGST+CGST)	Discount	Net Amount	View/Print	Edit	Delete
11	2020-02-20	RUNC0044	BJP congress	COMUTER SCIENCE	Bhavishay	0	0	0	0	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
12	2020-02-20	RUNC0045	ABCD	INFORMATION TECHNOLOGY	ggtht	0	0	0	0	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
13	2020-02-27	RUNC0047	fadfd	ARTS	ggtht	18	2	3	19	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
14	2020-02-27	RUNC0048	ABCD	CHEMISTRY	chem	33	5	5	34	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
15	2020-02-27	RUNC0049	ASDF	CHEMISTRY	chem	3	543	547.56	3	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
16	2020-02-27	RUNC0050				8583	15	1520.04	10088.04	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
17	2020-02-27	RUNC0051	ABCD	INFORMATION TECHNOLOGY	ggtht	2042	0	367.56	2409.56	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
18	2020-02-27	RUNC0052	ABCD	COMUTER SCIENCE	CS	3084	555.12	223	3416.12	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>
19	2020-02-27	RUNC0053	Information	IT		6505	828.9	0	5633.9	<input type="button" value="View"/>	<input type="button" value="Edit"/>	<input type="button" value="Delete"/>

Add New Product & Item

The screenshot shows a web browser window with the URL `localhost/RD/add-product.php`. The page title is "RDNC Service Portal - Purchase". The left sidebar contains a user profile for "bhavi" and a menu with options: DASHBOARD, Generate PO, View All PO, Products (highlighted), Add Product, View All Products, Party, Add New Party, View All Party, Department, Add Department, and View All Departments. The main content area is titled "> Add New Product or items" and contains two sections: "> New Product/Item Information" and "> Product Entry". The first section has input fields for Product Name, Manufacturer, Packing, and HSN No. The second section has input fields for GST, MRP, and Trade Price. A "Logout" button is in the top right corner.

> Add New Product or items

> New Product/Item Information

Product Name

Manufacturer

Packing

HSN No.

> Product Entry

GST

MRP

Trade Price

Logout

View All Product

The screenshot shows a web browser window with the URL `localhost/RD/view-products.php`. The page title is "RDNC Service Portal - Purchase". The left sidebar is identical to the previous screenshot. The main content area is titled "> View All Products" and features a table of products. The table has columns: Sr.No., Product Name, Manufacturer, Packing, HSN No., MRP, Trade Price, GST, Edit, and Delete. There are 6 entries in the table. Below the table, it says "Showing 1 to 6 of 6 entries" and "Previous 1 Next". A footer bar contains "© Copyrights All Rights Reserved".

> View All Products

10 records per page

Sr.No.	Product Name	Manufacturer	Packing	HSN No.	MRP	Trade Price	GST	Edit	Delete
1	Acid	Abcd			1111		10	Edit	Delete
2	Arduino	Amazon inc	box	6165126	1042	0.55	18	Edit	Delete
3	Raspberry Pi Model case B	google inc 123	box	5334431	3563	0.33	12	Edit	Delete
4	wagh bhakhri tea	Amazon inc	pouch	6165126	415	7890	12	Edit	Delete
5	Arduino 4	Amazon inc	box 123	09987	1000	0.33	18	Edit	Delete
6	Raspberry Pi	Amazon inc	box	123456	3563	0.55	18	Edit	Delete

Showing 1 to 6 of 6 entries

Previous 1 Next

© Copyrights All Rights Reserved

Add New Party

RDNC Service Portal - Purchase

localhost/RD/new-party.php

Logout

> Add New Party

> New Party Information

Party Name

Drug Bazar Id

Pan

DL No.

GSTIN

Address1

Address2

Email

bhavi

DASHBOARD

Generate PO

View All PO

Products

Add Product

View All Products

Party

Add New Party

View All Party

Department

Add Department

View All Departments

Type here to search

22:47 04-04-2020

View all Party

RDNC Service Portal - Purchase

localhost/RD/view-all-party.php

Logout

> View All Party

10 records per page

Search:

SN	Name	Pan	DL No.	Address	State	Edit	Delete
1	ABCD	23456789	77323456	B,64 Saptarishi shrishti sector 2,Mira road east	Maharashtra	Edit	Delete
2	ASDF	ER755FDRR6	098	B,64 Saptarishi shrishti sector 2,Mira road east	Maharashtra	Edit	Delete
3	BJP congress	98777	809	gujrat	gujrat	Edit	Delete
4	lml,mv/km/	hfc		n,mn.	m	Edit	Delete
5	nd,v n,dv ,	vdsvds	dvdv	hgikjh	hb	Edit	Delete
6	bkj/bkb	hb	hb	b	j	Edit	Delete
7	unke mumke	6789	3456	B,64 Saptarishi shrishti sector 2,Mira road east	Maharashtra	Edit	Delete
8	Chhichore	A5678	6789	169 Fort York Boulevard, Suite 310	ON	Edit	Delete
9	fadfd	556876	79897	B,64 Saptarishi shrishti sector 2,Mira road east	Maharashtra	Edit	Delete

Showing 1 to 9 of 9 entries

Previous 1 Next

© Copyrights All Rights Reserved

bhavi

DASHBOARD

Generate PO

View All PO

Products

Add Product

View All Products

Party

Add New Party

View All Party

Department

Add Department

View All Departments

Type here to search

22:47 04-04-2020

View all Departments

RDNC Service Portal - Purchase

localhost/RD/view-department.php

Logout

> View All Departments

10 records per page

Search:

Sr.No.	Department No.	Department Name	H.O.D.	Edit	Delete
1	DEPT001	Information Technology	Abcde	Edit	Delete
2	DEPT002	Computer Science	qwerty	Edit	Delete
3	DEPT003	Chemistry	Rajesh Thakur	Edit	Delete
4	DEPT004	Physics	Hareesh Gupta	Edit	Delete
5	DEPT005	Mass Media	Rohit Sharma	Edit	Delete

Showing 1 to 5 of 5 entries

Previous 1 Next

Copyrights All Rights Reserved

View all Staff

RDNC Service Portal - Purchase

localhost/RD/view-staff.php

Logout

> View All Staff

10 records per page

Search:

Sr.No.	Staff No.	Staff Name	Staff Head	Edit	Delete
1	STAFF001	Chem	Chandan Singh	Edit	Delete
2	STAFF002	IT	lkjhgfdsasd	Edit	Delete

Showing 1 to 2 of 2 entries

Previous 1 Next

Copyrights All Rights Reserved

Change Password

The screenshot shows the 'CHANGE PASSWORD' page in the RDNC Service Portal. The user 'bhavi' is logged in. The page has a sidebar with navigation links: DASHBOARD, Generate PO, View All PO, Products, Party, and Department. The main content area contains a form with two input fields: 'New Password:' and 'Re-write Password:'. A 'Set New Password' button is located to the right of the second field. Below the form, there is a teal banner with the text 'Copyrights All Rights Reserved'.

Account View All PO

The screenshot shows the 'View All PO' page in the RDNC Service Portal. The user 'accbhavi' is logged in. The page has a sidebar with navigation links: DASHBOARD, View All PO, and Profile. The main content area contains a table with columns: #, Date, PO Number, Party, Department, Staff, Gross Amount, GST (SGST+CGST), Discount, Net Amount, Pending Amount, Paid Amount, Payment Method, Payment Status, Payment, Edit, and Delete. The table displays 18 records. The 'Payment Status' column has a legend: 'Paid' (green checkmark) and 'Pending' (red minus sign). The 'Payment' column has a search bar.

#	Date	PO Number	Party	Department	Staff	Gross Amount	GST (SGST+CGST)	Discount	Net Amount	Pending Amount	Paid Amount	Payment Method	Payment Status	Payment	Edit	Delete
11	2020-02-20	RDNC0044	BIP congress	COMPUTER SCIENCE	Bhavishay	0	0	0	0	0	0		Paid			
12	2020-02-20	RDNC0045	ABCD	INFORMATION TECHNOLOGY	ggtht	0	0	0	0	0	0		Paid			
13	2020-02-27	RDNC0047	fadfd	ARTS	ggtht	18	2	3	19	0	19	Online Wallet	Paid			
14	2020-02-27	RDNC0048	ABCD	CHEMISTRY	chem	33	5	5	34	34	0		Pending			
15	2020-02-27	RDNC0049	ASDF	CHEMISTRY	chem	3	543	547.56	3	3	0		Pending			
16	2020-02-27	RDNC0050				8583	15	1520.04	10088.04	-39911.96	50000	Debit/Credit Card	Paid			
17	2020-02-27	RDNC0051	ABCD	INFORMATION TECHNOLOGY	ggtht	2042	0	367.56	2409.56	1409.56	1000	Cash	Pending			
18	2020-02-27	RDNC0052	ABCD	COMPUTER SCIENCE	CS	3084	555.12	723	3616.12	0	3616.12	NET	Paid			

CONCLUSION:

The package was designed in such a way that future modifications can be done easily. The following conclusions can be deduced from the development of the project.

- Automation of the entire system improves the efficiency
- It provides a friendly graphical user interface which proves to be better when compared to the existing system.
- It gives appropriate access to the authorized users depending on their permissions.
- It effectively overcomes the delay in communications.
- Updating of information becomes so easier.
- System security, data security and reliability are the striking features.
- The System has adequate scope for modification in future if it is necessary.

References

For PHP

- <https://www.w3schools.com/php/default.asp>
- <https://www.sitepoint.com/php/>
- <https://www.php.net/>

For MySQL

- <https://www.mysql.com/>
- <http://www.mysqltutorial.org>

For XAMPP

- <https://www.apachefriends.org/download.html>