


Lab1:AngulartourofHeroes

Dr.B.Hanumanthu

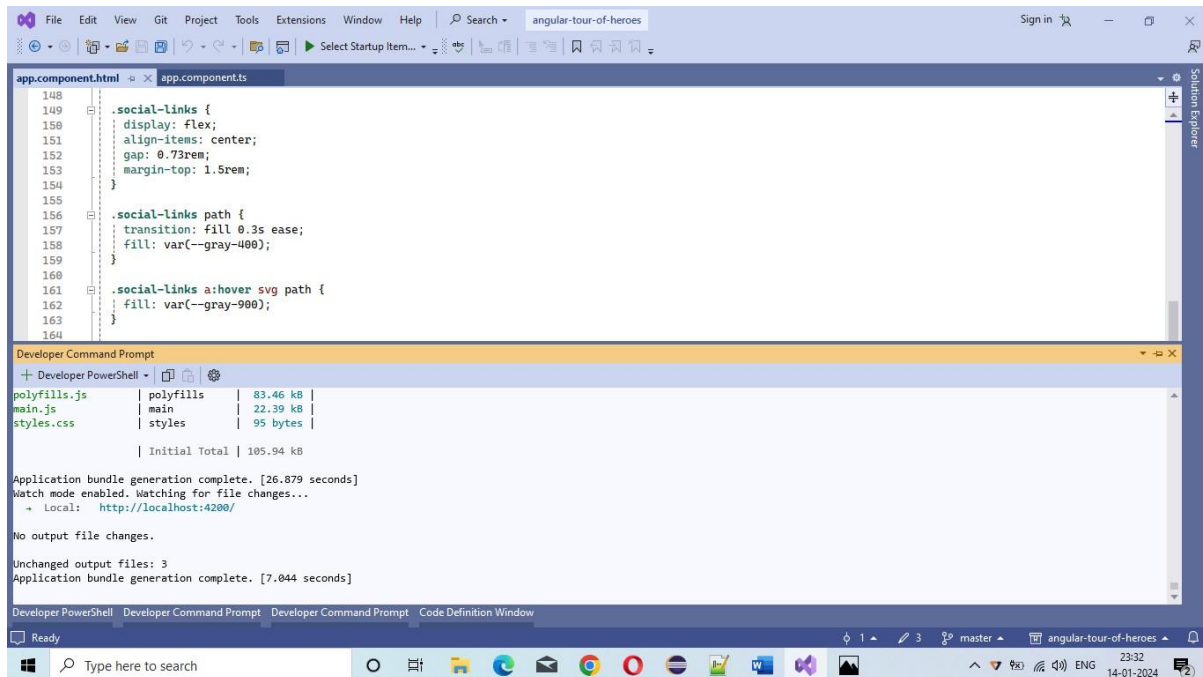

The screenshot shows the Visual Studio Code editor with the `app.component.ts` file open. The file contains CSS and SCSS code for the `.social-links` component. Below the editor, the Developer Command Prompt is open, showing the output of the Angular CLI commands.

```
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164

.social-links {
  display: flex;
  align-items: center;
  gap: 0.73rem;
  margin-top: 1.5rem;
}

.social-links path {
  transition: fill 0.3s ease;
  fill: var(--gray-400);
}

.social-links a:hover svg path {
  fill: var(--gray-900);
}
```

```
+ Developer PowerShell
polyfills.js | polyfills | 83.46 kB |
main.js      | main      | 22.39 kB |
styles.css   | styles    | 95 bytes |
              | Initial Total | 105.94 kB

Application bundle generation complete. [26.879 seconds]
Watch mode enabled. Watching for file changes...
→ Local: http://localhost:4200/

No output file changes.
Unchanged output files: 3
Application bundle generation complete. [7.044 seconds]
```

