

Session-2

Question1: Open MySQL Workbench or CLI and write a CREATE TABLE statement to create a table called 'restaurants' with columns: id (INT, primary key, auto-increment), name (VARCHAR(100)), location (VARCHAR(100)), and rating (DECIMAL(2,1)).

Ans:-

```
CREATE DATABASE IF NOT EXISTS restaurantdb;
```

```
USE restaurantdb;
```

```
CREATE TABLE IF NOT EXISTS restaurants (
```

```
    id INT PRIMARY KEY AUTO_INCREMENT,
```


```
    name VARCHAR(100),
```

```
    location VARCHAR(100),
```

```
    rating DECIMAL(2,1)
```

```
);
```

```
select * from restaurants;
```

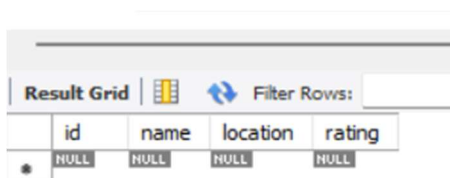

The screenshot shows the MySQL Workbench interface. At the top, there is a 'Result Grid' tab and a 'Filter Rows' button. Below this, a table structure is displayed with four columns: 'id', 'name', 'location', and 'rating'. Each column has a 'NULL' value in the first row, indicating that the table is currently empty. A small asterisk icon is visible in the bottom-left corner of the table grid.

	id	name	location	rating
*	NULL	NULL	NULL	NULL

Question2: Use the ALTER TABLE command in MySQL to add a new column 'average_cost' (INT) to your 'restaurants' table.


Hint: Remember to specify the data type when adding a new column.

Ans:-

```
ALTER TABLE restaurants
```

```
ADD COLUMN average_cost INT;
```

```
SELECT * FROM restaurants;
```

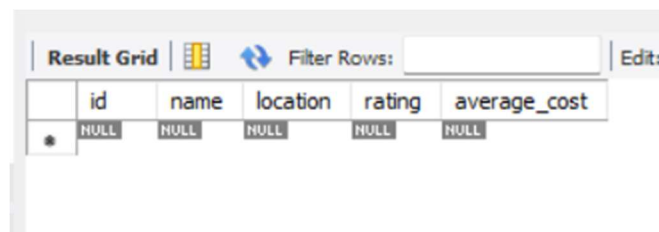


	id	name	location	rating	average_cost
*	NULL	NULL	NULL	NULL	NULL

Question3: Write a SQL statement to DROP the 'restaurants' table you created earlier. Double-check your command before running it to avoid accidental data loss.

Ans:-

```
DROP TABLE restaurants;
```

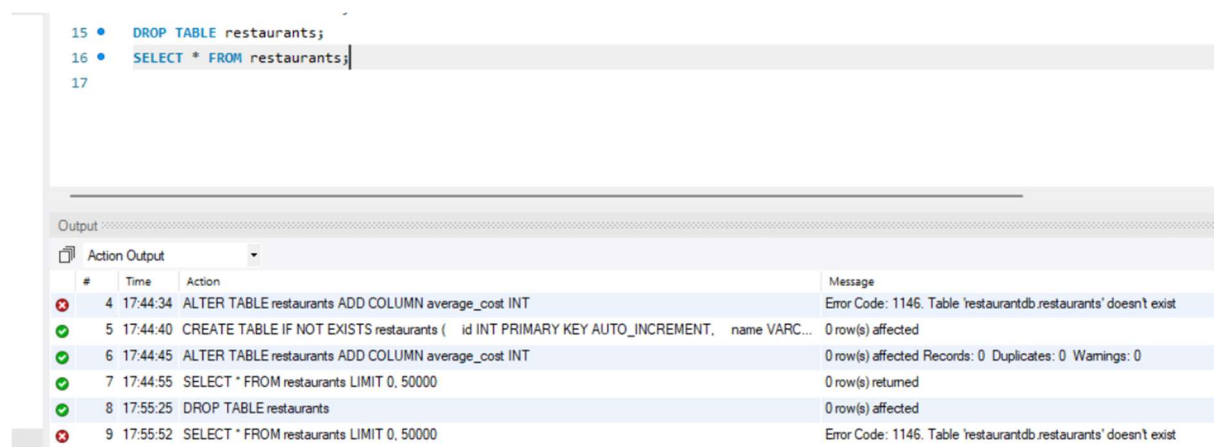

#	Time	Action	Message
15		<code>DROP TABLE restaurants;</code>	
16		<code>SELECT * FROM restaurants;</code>	
17			
4	17:44:34	ALTER TABLE restaurants ADD COLUMN average_cost INT	Error Code: 1146. Table 'restaurantdb.restaurants' doesn't exist
5	17:44:40	CREATE TABLE IF NOT EXISTS restaurants (id INT PRIMARY KEY AUTO_INCREMENT, name VARCHAR(255) NOT NULL, location VARCHAR(255) NOT NULL, rating DECIMAL(3,2) NOT NULL, average_cost INT NOT NULL)	0 row(s) affected
6	17:44:45	ALTER TABLE restaurants ADD COLUMN average_cost INT	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
7	17:44:55	SELECT * FROM restaurants LIMIT 0, 50000	0 row(s) returned
8	17:55:25	DROP TABLE restaurants	0 row(s) affected
9	17:55:52	SELECT * FROM restaurants LIMIT 0, 50000	Error Code: 1146. Table 'restaurantdb.restaurants' doesn't exist


Question4: Create a new table called 'playlists' for a music app like Spotify, with columns: playlist_id (INT, primary key, auto-increment), title (VARCHAR(50)), created_by (VARCHAR(50)), and created_at (DATE).

Ans:-

```
create database spotify;
```

```
use spotify;
```

```
CREATE TABLE playlists (  
    playlist_id INT PRIMARY KEY AUTO_INCREMENT,  
    title VARCHAR(50),  
    created_by VARCHAR(50),  
    created_at DATE  
);  
  
SELECT * FROM playlists;
```

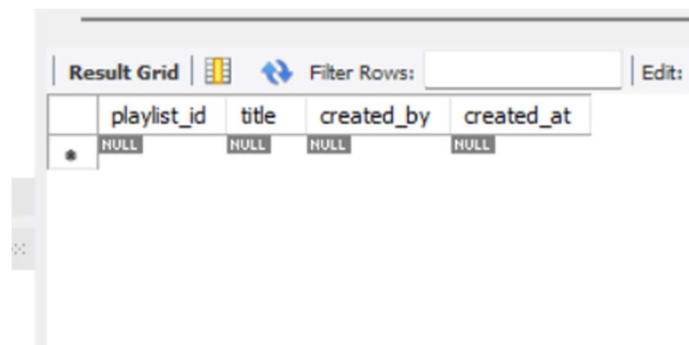

	playlist_id	title	created_by	created_at
*	NULL	NULL	NULL	NULL