
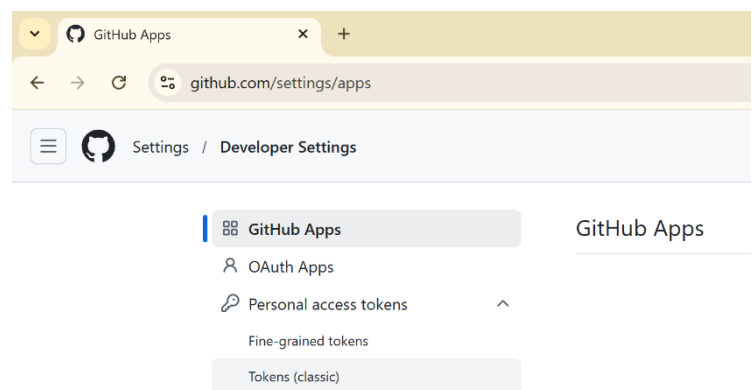
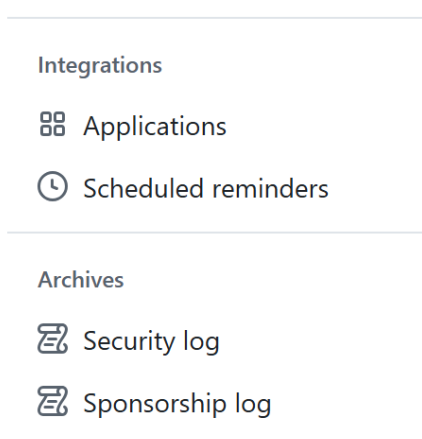


NAME : SRISTI BHOWMICK , COLLEGE ROLL : BTECH/CSE/23/095 , EXAM ROLL : 11600223120

ASSIGNMENT NO : 8 → Deploy a project from a local machine to GitHub and vice versa.

STEPS: OPEN GITHUB -> CLICK ON PROFILE SETTINGS -> DEVELOPERS SETTING -> PERSONAL ACCESS TOKENS -> CLASSIC TOKEN -> GENERATE A NEW TOKEN -> GIVE A TOKEN NAME -> CHECK ALL THE BOXES -> TOKEN GENERATED -> COPY THE TOKEN.

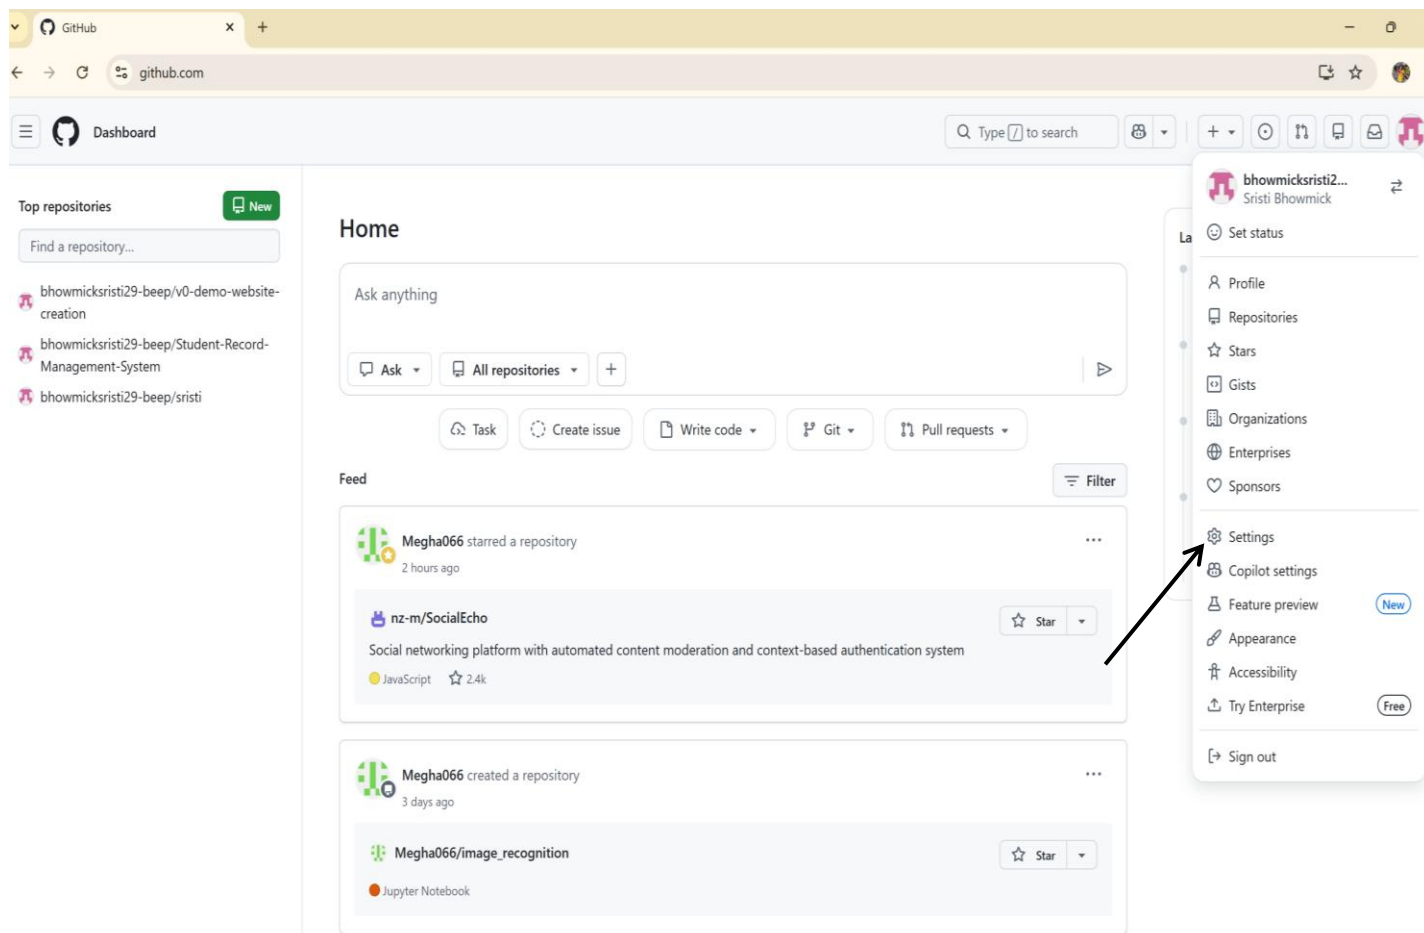

Want to build sc

Personal Access Tokens (Classic)

github.com/settings/tokens

Settings / Developer Settings

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens

Tokens (classic)

Personal access tokens (classic)

Generate new token

Tokens you have generated that can be used to access the [GitHub API](#).

token1 — admin:enterprise, admin:gpg_key, admin:org, admin:org_hook, admin:public_key, admin:ssh_signing_key, audit_log, codespace, copilot, delete:packages, delete_repo, gist, notifications, packages, repo, security_events, write:discussion, write:network_configurations, write:packages

This token has no expiration date.

Generate new token

Generate new token (classic)

For general use

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

© 2026 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information

New Personal Access Token (Classic)

github.com/settings/tokens/new

Settings / Developer Settings

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens

Tokens (classic)

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

Token2

What's this token for?

Expiration

No expiration

7 days (Mar 03, 2026)

30 days (Mar 26, 2026)

60 days (Apr 25, 2026)

90 days (May 25, 2026)

Custom

☒ No expiration

☐ repo:invite

☐ security_events

Full control of private repositories

Access commit status

Access deployment status

Access public repositories

Access repository invitations

Read and write security events

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)


☒ repo	Full control of private repositories
☒ repo:status	Access commit status
☒ repo_deployment	Access deployment status
☒ public_repo	Access public repositories
☒ repo:invite	Access repository invitations
☒ security_events	Read and write security events
☒ workflow	Update GitHub Action workflows
☒ write:packages	Upload packages to GitHub Package Registry
☒ read:packages	Download packages from GitHub Package Registry
☒ delete:packages	Delete packages from GitHub Package Registry
☒ admin:org	Full control of orgs and teams, read and write org projects
☒ write:org	Read and write org and team membership, read and write org projects
☒ read:org	Read org and team membership, read org projects
☒ manage_runners:org	Manage org runners and runner groups
☒ admin:public_key	Full control of user public keys
☒ write:public_key	Write user public keys
☒ read:public_key	Read user public keys
☒ admin:repo_hook	Full control of repository hooks
☒ write:repo_hook	Write repository hooks
☒ read:repo_hook	Read repository hooks
☒ admin:org_hook	Full control of organization hooks
☒ gist	Create gists
☒ notifications	Access notifications
☒ user	Update ALL user data

☒ delete_repo	Delete repositories
☒ write:discussion	Read and write team discussions
☒ read:discussion	Read team discussions
☒ admin:enterprise	Full control of enterprises
☒ manage_runners:enterprise	Manage enterprise runners and runner groups
☒ manage_billing:enterprise	Read and write enterprise billing data
☒ read:enterprise	Read enterprise profile data
☒ scim:enterprise	Provisioning of users and groups via SCIM
☒ audit_log	Full control of audit log
☒ read:audit_log	Read access of audit log
☒ codespace	Full control of codespaces
☒ codespace:secrets	Ability to create, read, update, and delete codespace secrets
☒ copilot	Full control of GitHub Copilot settings and seat assignments
☒ manage_billing:copilot	View and edit Copilot Business seat assignments
☒ write:network_configurations	Write org hosted compute network configurations
☒ read:network_configurations	Read org hosted compute network configurations
☒ project	Full control of projects
☒ read:project	Read access of projects
☒ admin:gpg_key	Full control of public user GPG keys
☒ write:gpg_key	Write public user GPG keys
☒ read:gpg_key	Read public user GPG keys
☒ admin:ssh_signing_key	Full control of public user SSH signing keys
☒ write:ssh_signing_key	Write public user SSH signing keys
☒ read:ssh_signing_key	Read public user SSH signing keys


Generate token

Cancel



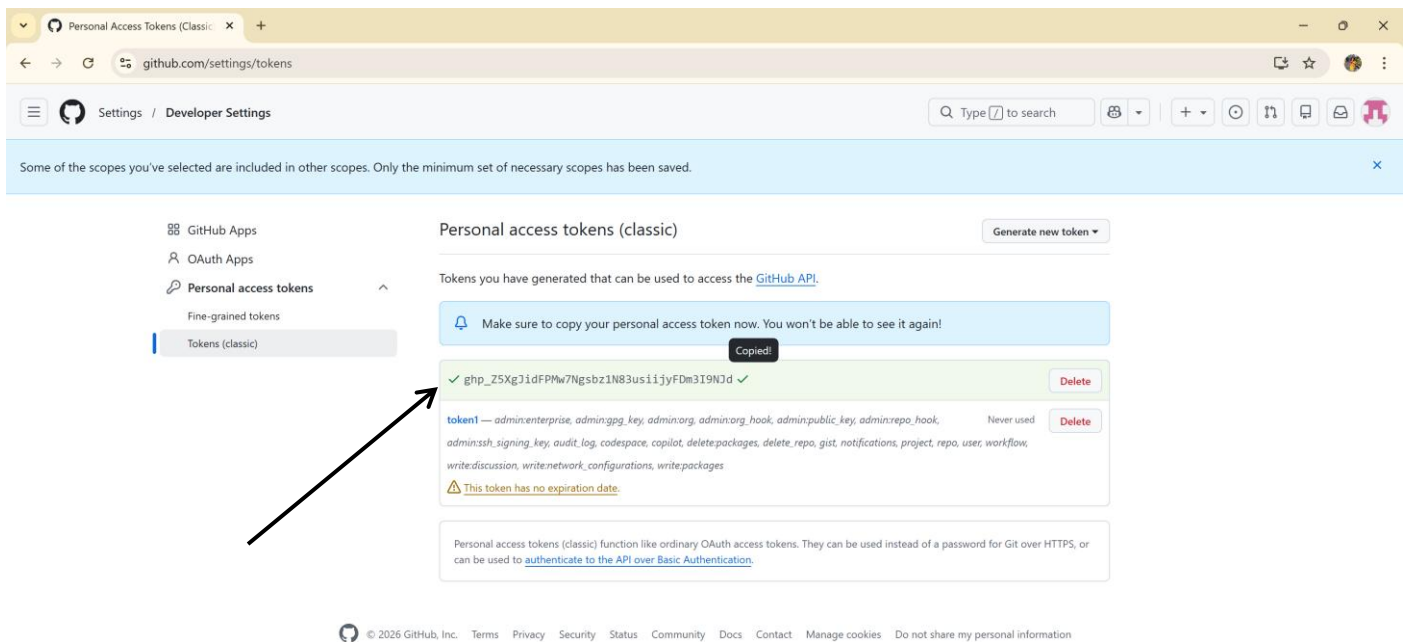

STEPS: GO TO DASHBOARD -> CLICK ON NEW -> CREATE A REPOSITORY -> PROVIDE REPOSITORY NAME AND MAKE IT PUBLIC -> CREATE -> COPY HTTPS LINK.

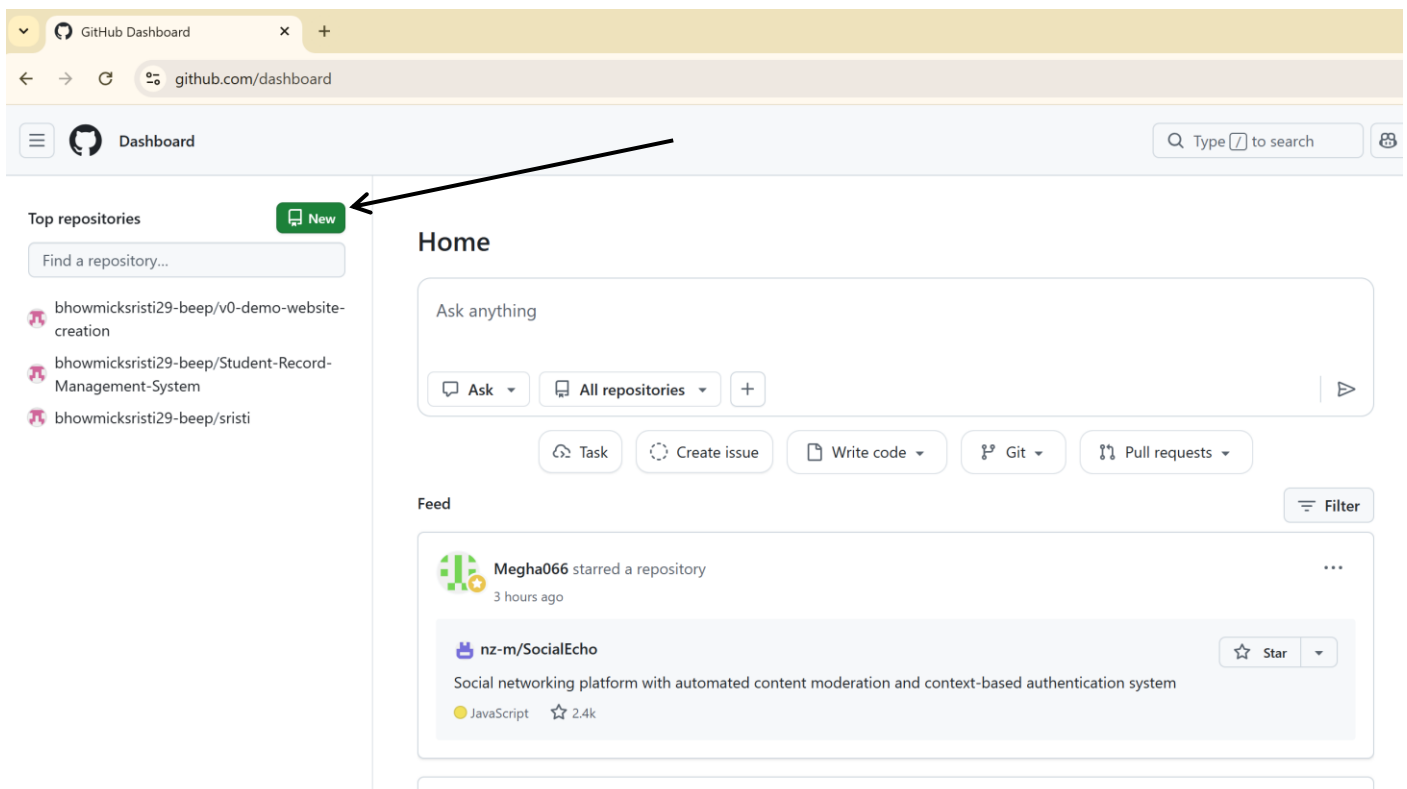

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

1 General

Owner *

 bhowmicksristi29-beep

Repository name *

AWS_1

✓ AWS_1 is available.

Great repository names are short and memorable. How about [laughing-winner](#)?

Description

0 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository

 Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off ☐

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)


No .gitignore

Add license

Licenses explain how others can use your code. [About licenses](#)

No license

Create repository

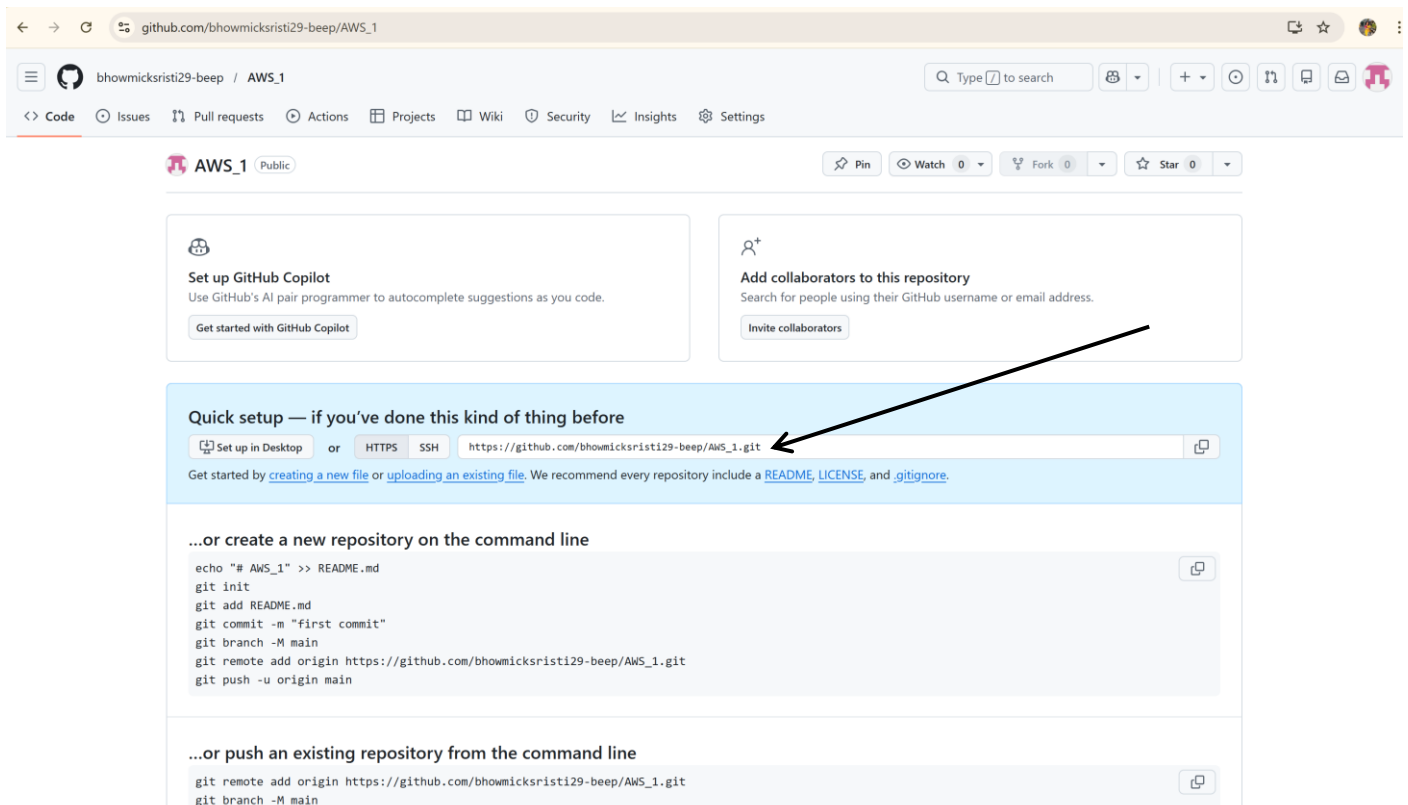



The screenshot shows the GitHub repository page for `bhowmicksristi29-beep/AWS_1`. The repository is public and has no README, .gitignore, or license. The page includes a navigation bar with links to Code, Issues, Pull requests, Actions, Projects, Wiki, Security, Insights, and Settings. Below the navigation bar, there are buttons for Pin, Watch (0), Fork (0), and Star (0). The main content area features a "Quick setup" section with a link to the repository's URL (`https://github.com/bhowmicksristi29-beep/AWS_1.git`) and a "Get started" button. Below this, there are two sections: "...or create a new repository on the command line" and "...or push an existing repository from the command line". The first section contains a code block with the following commands:

```
echo "# AWS_1" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/bhowmicksristi29-beep/AWS_1.git
git push -u origin main
```

The second section contains the following commands:

```
git remote add origin https://github.com/bhowmicksristi29-beep/AWS_1.git
git branch -M main
```

STEPS: OPEN PROJECT FOLDER - > RIGHT CLICK -> SELECT OPEN GITBASH HERE -> RUN COMMANDS. -> PROJECT IS SUCCESSFULLY PUSHED FROM LOCAL MACHINE TO GITHUB.

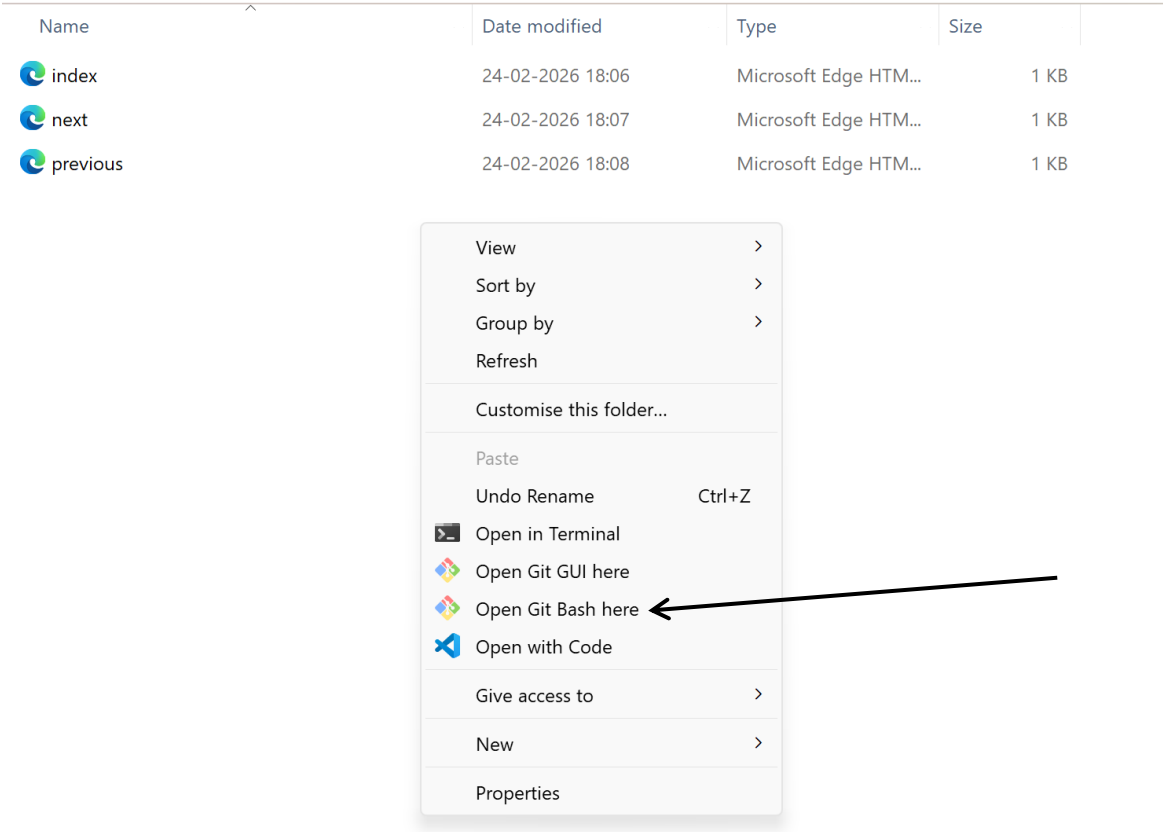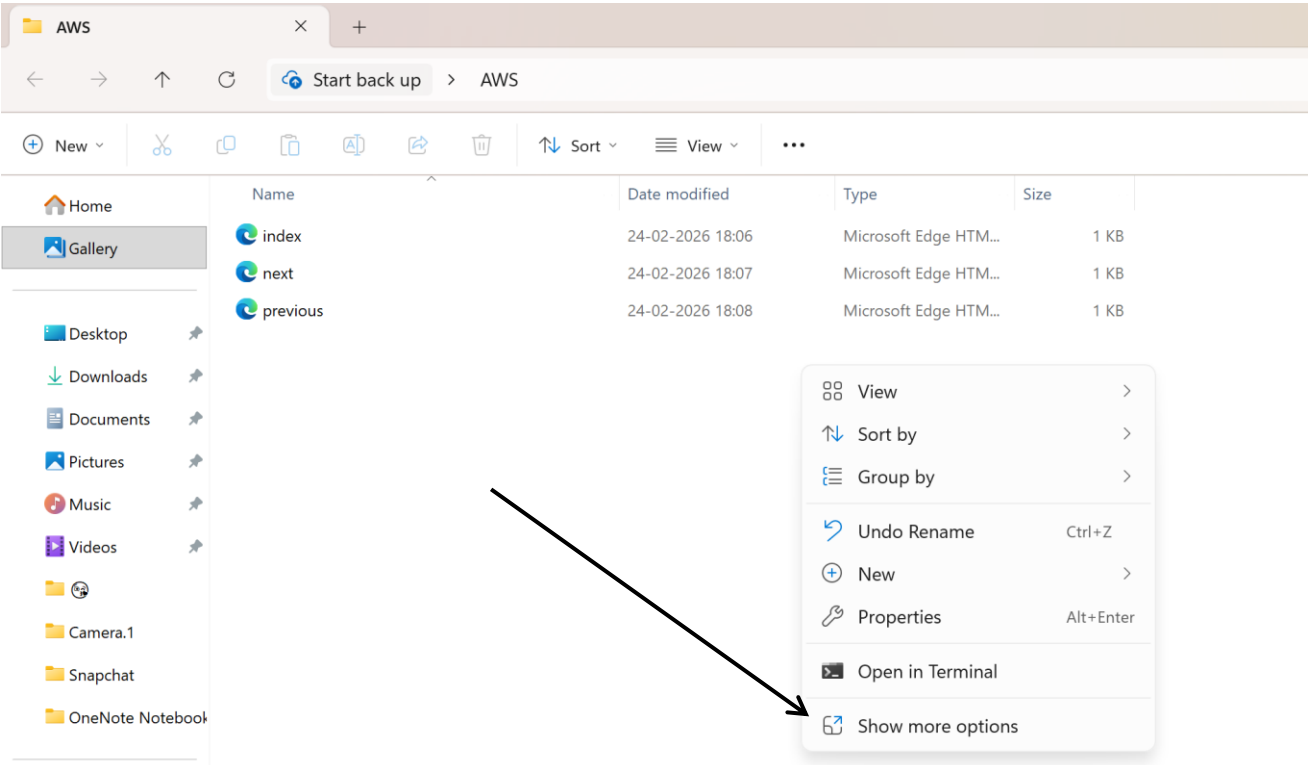



MINGW64:/c/Users/bhowm/Desktop/AWS

```
bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS
$ git config --global --list ←
user.name=Sristi Bhowmick
user.email=bhowmicksristi29@gmail.com
```

```
bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS
$ git init ←
Initialized empty Git repository in c:/Users/bhowm/Desktop/AWS/.git/

bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$ git add . ←

bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$ git status ←
On branch main

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   index.html
        new file:   next.html
        new file:   previous.html

bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$ git commit -m "Done" ←
[main (root-commit) 4b84681] Done
3 files changed, 38 insertions(+)
create mode 100644 index.html
create mode 100644 next.html
create mode 100644 previous.html
```

```
bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$ git remote add origin https://github.com/bhowmicksristi29-beep/AWS_1.git

bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$ git push -u origin main ←
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 645 bytes | 322.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/bhowmicksristi29-beep/AWS_1.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.

bhowm@LAPTOP-056F70QE MINGW64 ~/Desktop/AWS (main)
$
```

GitHub
Sign in

Browser/Device	Token
----------------	-------

Token

Personal access token

Sign in

Don't have an account? [Sign up](#)

GitHub
Sign in


Browser/Device	Token
----------------	-------

Token

).....

Sign in

Don't have an account? [Sign up](#)

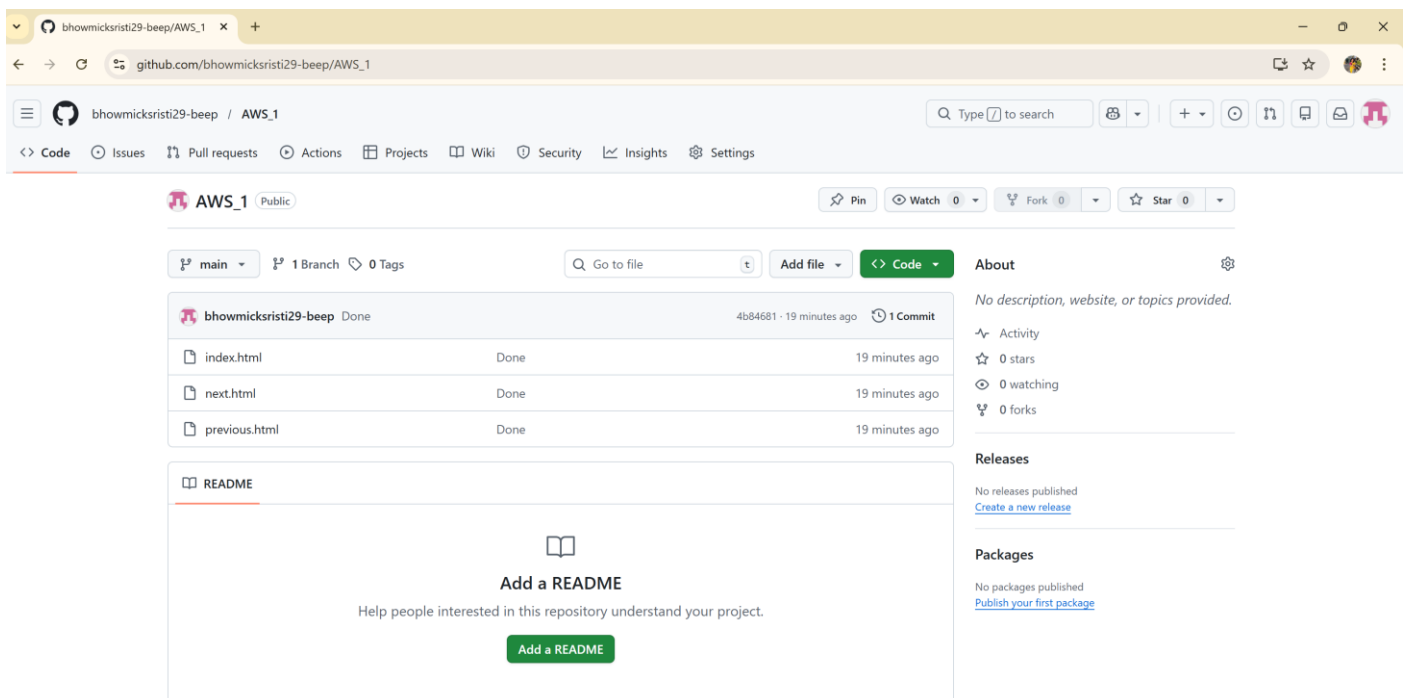

FROM GITHUB TO LOCAL MACHINE

STEPS: OPEN THE REPO -> CLICK ON CODE -> COPY THE HTTPS LINK -> CREATE A NEW FOLDER IN LOCAL MACHINE
-> OPEN GITBASH THERE -> RUN COMMAND-> the project is cloned from github to local machine.

