

NAME : SRISTI BHOWMICK , COLLEGE ROLL : BTECH/CSE/23/095 , EXAM ROLL : 11600223120

ASSIGNMENT 14

Create an Elastic IP for an Instance.

The screenshot displays the AWS Management Console interface for launching a new EC2 instance. The 'Launch instance' wizard is active, showing the 'Summary' panel on the right. The configuration details are as follows:

- Number of instances:** 1
- Software Image (AMI):** Canonical, Ubuntu, 24.04, amd64...read more (ami-05d2d839d4f73aafb)
- Virtual server type (instance type):** t3.micro
- Firewall (security group):** New security group
- Storage (volumes):** 1 volume(s) - 8 GiB

The 'Launch instance' button is highlighted in orange. A blue banner at the top of the console indicates that the user is new to launching instances in EC2 and offers a walkthrough.

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:

Search [Alt+S]

Asia Pacific (Mumbai) Sristi Bhowmick (0217-5467-6955) Sristi Bhowmick

EC2 > Instances > Launch an instance

Amazon Machine Image (AMI)

Ubuntu Server 24.04 LTS (HVM), SSD Volume Type Free tier eligible

ami-05d2d839d4f73aafb (64-bit (x86)) / ami-0f6c99577b93a642b (64-bit (Arm))
Virtualization: hvm ENA enabled: true Root device type: ebs

Description
Ubuntu Server 24.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).
Canonical, Ubuntu, 24.04, amd64 noble image

Architecture	AMI ID	Publish Date	Username
64-bit (x86)	ami-05d2d839d4f73aafb	2026-03-14	ubuntu Verified provider

▼ Instance type [Info](#) | [Get advice](#)

Instance type

t3.micro Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand Linux base pricing: 0.0112 USD per Hour On-Demand SUSE base pricing: 0.0112 USD per Hour
On-Demand Windows base pricing: 0.0204 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0147 USD per Hour On-Demand RHEL base pricing: 0.04 USD per Hour

☐ All generations [Compare instance types](#)

[Additional costs apply for AMIs with pre-installed software](#)

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

key2 Create new key pair

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)
Canonical, Ubuntu, 24.04, amd6...[read more](#)
ami-05d2d839d4f73aafb

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:

Search [Alt+S]

Asia Pacific (Mumbai) Sristi Bhowmick (0217-5467-6955) Sristi Bhowmick

EC2 > Instances > Launch an instance

▼ Network settings [Info](#) [Edit](#)

Network [Info](#)
vpc-0a874208a064ece04

Subnet [Info](#)
No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)
Enable

Firewall (security groups) [Info](#)
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☐ Create security group ☒ Select existing security group

Common security groups [Info](#)

Select security groups

SristiSecurity sg-0629a8fa4d7c72b46 ×
VPC: vpc-0a874208a064ece04

[Compare security group rules](#)

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)
Canonical, Ubuntu, 24.04, amd6...[read more](#)
ami-05d2d839d4f73aafb

Virtual server type (instance type)
t3.micro

Firewall (security group)
SristiSecurity

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:

Search [Alt+S]

Asia Pacific (Mumbai) Sristi Bhowmick (0217-5467-6955) Sristi Bhowmick

EC2 > Instances > Launch an instance

Success
Successfully initiated launch of instance (i-03fcc8f53001c5048)

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#InstanceDetails:instanceId=i-03fcc8f53001c5048

Search [Alt+S]

Asia Pacific (Mumbai) Sristi Bhowmick (0217-5467-6955) Sristi Bhowmick

EC2 > Instances > i-03fcc8f53001c5048

EC2

Dashboard
AWS Global View
Events

▼ **Instances**

Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts

Instance summary for i-03fcc8f53001c5048 (Sristi14) [Info](#)

Updated less than a minute ago

Instance ID i-03fcc8f53001c5048	Public IPv4 address 13.206.71.49 open address	Private IPv4 addresses 172.31.39.40
IPv6 address -	Instance state Running	Public DNS ec2-13-206-71-49.ap-south-1.compute.amazonaws.com open address
Hostname type IP name: ip-172-31-39-40.ap-south-1.compute.internal	Private IP DNS name (IPv4 only) ip-172-31-39-40.ap-south-1.compute.internal	Elastic IP addresses -
Answer private resource DNS name IPv4 (A)	Instance type t3.micro	

th-1.console.aws.amazon.com/ec2/home?region=ap-south-1#Home:

Search[Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Resources

You are using the following Amazon EC2 resources in the Asia Pacific (Mumbai) Region:

Instances (running)	5	Auto Scaling Groups	1	Capacity Reservations	0
Dedicated Hosts	0	Elastic IPs	2	Instances	5
Key pairs	2	Load balancers	1	Placement groups	0
Security groups	2	Snapshots	0	Volumes	5

EC2 cost

Date range: Past 6 monthsRegion: Global

Costs in your free plan account are covered by credits.

Credits remaining
\$138.33 USD

Days remaining
99 (July 16, 2026)

[Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Instances (1/5) Info

ConnectInstance stateActionsLaunch instances

Saved filter setsChoose filter setFind Instance by attribute or tag (case-sensitive)

Instance state = runningClear filters

	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 DNS
☐		i-041b045531c742ed1	Running	t3.micro	3/3 checks passed	ap-south-1-c	ec2-3-110-126-236.ap
☐	Sristi10	i-0e8237ea5307ef08a	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-13-232-92-252.ap
☐	Sristi12	i-079b6e1ffc94733d9	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-65-0-204-233.ap
☐		i-085020bb3a02bd613	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-3-108-191-143.ap
☒	Sristi14	i-03fcc8f53001c5048	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-13-206-71-49.ap

i-03fcc8f53001c5048 (Sristi14)

Stop instance

Stopping your instance allows you to reduce costs, modify settings, and troubleshoot problems.

Instance IDStop protectionResult

☒ i-03fcc8f53001c5048 (Sristi14)DisabledCan stop

Associated resources

You will continue to incur charges for these resources while the instance is stopped

You will be billed for associated resources

After you stop the instance, you are no longer charged usage or data transfer fees for it. However, you will still be billed for associated Elastic IP addresses and EBS volumes.

Skip OS shutdown

This option skips the graceful OS shutdown process. Use only when your instance must be stopped immediately, such as during an emergency or failover.

☐ Skip OS shutdown

CancelStop

[Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Instances (1/5) Info

ConnectInstance stateActionsLaunch instances

Saved filter setsChoose filter setFind Instance by attribute or tag (case-sensitive)

Instance state = runningClear filters

	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 DNS
☐	Sristi10	i-0e8237ea5307ef08a	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-13-232-92-252.ap
☐	Sristi12	i-079b6e1ffc94733d9	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-65-0-204-233.ap
☐		i-085020bb3a02bd613	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-3-108-191-143.ap
☒	Sristi14	i-03fcc8f53001c5048	Stopped	t3.micro	-	ap-south-1a	-

[Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

cc8f53001c5048

Instance summary for i-03fcc8f53001c5048 (Sristi14) Info

ConnectInstance stateActions

Updated less than a minute ago

Instance ID

☒ i-03fcc8f53001c5048

IPv6 address

-

Hostname type

IP name: ip-172-31-39-40.ap-south-1.compute.internal

Public IPv4 address

☒ 13.235.50.218 | open address

Instance state

Running

Private IPv4 addresses

☒ 172.31.39.40

Public DNS

☒ ec2-13-235-50-218.ap-south-1.compute.amazonaws.com | open address

Private IP DNS name (IPv4 only)

☒ ip-172-31-39-40.ap-south-1.compute.internal

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Features

Features

Services

Resources

Documentation

Knowledge articles

Marketplace

Blog posts

Tutorials

Events

Elastic IP addresses

VPC feature

Elastic IPs

EC2 feature

Create a SFTP server

AWS Transfer Family feature

Connect

Instance state

Actions

Copy IPv4 address

172.31.39.40

Public DNS

ec2-13-235-50-218.ap-south-1.compute.amazonaws.com

open address

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#Addresses:

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

EC2

Elastic IP addresses

Elastic IP addresses (2)

Find elastic IP addresses by attribute or tag

	Name	Allocated IPv4 address	Type	Allocation ID	Reverse DNS record	Associated ins
☐	-	13.205.40.105	Public IP	eipalloc-09b5e682db25a9750	-	-
☐	-	43.204.152.175	Public IP	eipalloc-095df9657fd98a12a	-	-

Actions

Allocate Elastic IP address

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#AllocateAddress:

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

EC2

Elastic IP addresses

Allocate Elastic IP address

Elastic IP address settings

Public IPv4 address pool

Amazon's pool of IPv4 addresses

Public IPv4 address that you bring to your AWS account with BYOIP. (option disabled because no pools found) Learn more

Customer-owned pool of IPv4 addresses created from your on-premises network for use with an Outpost. (option disabled because no customer owned pools found) Learn more

Allocate using an IPv4 IPAM pool (option disabled because no public IPv4 IPAM pools with AWS service as EC2 were found)

Network border group

ap-south-1

Global static IP addresses

AWS Global Accelerator can provide global static IP addresses that are announced worldwide using anycast from AWS edge locations. This can help improve the availability and latency for your user traffic by using the Amazon global network. Learn more

Create accelerator

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tag

Cancel

Allocate

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#Addresses:PublicIp=13.232.46.147

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Elastic IP address allocated successfully.

Elastic IP address 13.232.46.147

Associate this Elastic IP address

Elastic IP addresses (1)

Find elastic IP addresses by attribute or tag

Public IPv4 address : 13.232.46.147

Clear filters

	Name	Allocated IPv4 address	Type	Allocation ID	Reverse DNS record	Associated ins
☐	-	13.232.46.147	Public IP	eipalloc-04c27ee55667cbffa	-	-

Actions

Allocate Elastic IP address

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Elastic IP address allocated successfully.
Elastic IP address 13.232.46.147

Associate this Elastic IP address

Elastic IP addresses (1/1)

Find elastic IP addresses by attribute or tag

Public IPv4 address : 13.232.46.147

Clear filters

	Name	Allocated IPv4 address	Type	Allocation ID	Associated instance
☒	-	13.232.46.147	Public IP	eipalloc-04c27ee55667cbffa	-

Actions

Allocate Elastic IP address

View details

Release Elastic IP addresses

Associate Elastic IP address

Disassociate Elastic IP address

Update reverse DNS

Enable transfers

Disable transfers

Accept transfers

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#AssociateAddress:PublicIps=13.232.46.147

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

EC2

Elastic IP addresses

Associate Elastic IP address

Associate Elastic IP address

Choose the instance or network interface to associate to this Elastic IP address (13.232.46.147)

Elastic IP address: 13.232.46.147

Resource type

Choose the type of resource with which to associate the Elastic IP address.

☒ Instance

☐ Network interface

If you associate an Elastic IP address with an instance that already has an Elastic IP address associated, the previously associated Elastic IP address will be disassociated, but the address will still be allocated to your account. [Learn more](#)

If no private IP address is specified, the Elastic IP address will be associated with the primary private IP address.

Instance

Private IP address

The private IP address with which to associate the Elastic IP address.

Reassociation

Specify whether the Elastic IP address can be reassociated with a different resource if it already associated with a resource.

☒ Allow this Elastic IP address to be reassociated

Cancel

Associate

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Elastic IP address associated successfully.
Elastic IP address 13.232.46.147 has been associated with instance i-03fcc8f53001c5048

Associate this Elastic IP address

Elastic IP addresses (1)

Find elastic IP addresses by attribute or tag

elastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

i-03fcc8f53001c5048

Instance summary for i-03fcc8f53001c5048 (Sristi14)

Updated less than a minute ago

Instance ID

i-03fcc8f53001c5048

Public IPv4 address

13.232.46.147 | [open address](#)

Private IPv4 addresses

172.31.39.40

IPv6 address

Instance state

Public DNS

Connect

Instance state

Actions

Instances (1/5)

Find Instance by attribute or tag (case-sensitive)

Instance state = running

Clear filters

	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone	Public IPv4 DNS
☐		i-041b045531c742ed1	Running	t3.micro	3/3 checks passed	ap-south-1c	ec2-3-110-126-236.ap-south-1.amazonaws.com
☐	Sristi10	i-0e8237ea5307ef08a	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-13-232-92-252.ap-south-1.amazonaws.com
☐	Sristi12	i-079b6e1ffc94733d9	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-65-0-204-233.ap-south-1.amazonaws.com
☐		i-085020bb3a02bd613	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-3-108-191-143.ap-south-1.amazonaws.com
☒	Sristi14	i-03fcc8f53001c5048	Running	t3.micro	3/3 checks passed	ap-south-1a	ec2-13-232-46-147.ap-south-1.amazonaws.com

Stop instance

Start instance

Reboot instance

Hibernate instance

Terminate (delete) instance

lastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Instances (1/5) Info

Last updated 2 minutes ago

Connect

Instance state

Actions

Launch instances

Saved filter sets

Choose filter set

Find Instance by attribute or tag (case-sensitive)

Instance state = running

Clear filters

Name

Instance ID

Instance state

Instance type

Status check

Availability Zone

Public IPv4 DNS

Sristi10

i-041b045531c742ed1

Running

t3.micro

3/3 checks passed

ap-south-1a

ec2-3-110-126-236.ap-south-1.compute.amazonaws.com

Sristi12

i-0e8237ea5307ef08a

Running

t3.micro

3/3 checks passed

ap-south-1a

ec2-13-232-92-252.ap-south-1.compute.amazonaws.com

Sristi14

i-079b6e1ffc94733d9

Running

t3.micro

3/3 checks passed

ap-south-1a

ec2-65-0-204-233.ap-south-1.compute.amazonaws.com

Sristi14

i-085020bb3a02bd613

Running

t3.micro

3/3 checks passed

ap-south-1a

ec2-3-108-191-143.ap-south-1.compute.amazonaws.com

Sristi14

i-03fcc8f53001c5048

Stopping

t3.micro

3/3 checks passed

ap-south-1a

ec2-13-232-46-147.ap-south-1.compute.amazonaws.com

Force stop instance

Start instance

Reboot instance

Hibernate instance

Terminate (delete) instance

lastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

03fcc8f53001c5048

Instance summary for i-03fcc8f53001c5048

Updated 2 minutes ago

Connect

Instance state

Actions

Instance ID

i-03fcc8f53001c5048

IPv6 address

-

Public IPv4 address

13.232.46.147 | open address

Private IPv4 addresses

172.31.39.40

Public DNS

ec2-13-232-46-147.ap-south-1.compute.amazonaws.com | open address

Instance state

Running

lastic ip addresses

Ask Amazon Q

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Elastic IP address associated successfully.

Elastic IP address 13.232.46.147 has been associated with instance i-03fcc8f53001c5048

Elastic IP addresses (1/3) Info

Find elastic IP addresses by attribute or tag

Actions

Allocate Elastic IP address

Name

Allocated IPv4 address

Type

Allocation ID

Release

-

13.205.40.105

Public IP

eipalloc-09b5e682db25a9750

-

13.232.46.147

Public IP

eipalloc-04c27ee55667cbffa

-

43.204.152.175

Public IP

eipalloc-095df9657fd98a12a

View details

Release Elastic IP addresses

Associate Elastic IP address

Disassociate Elastic IP address

Update reverse DNS

Enable transfers

Disable transfers

Accept transfers

Elastic IP address disassociated successfully.

Elastic IP address 13.232.46.147

Elastic IP addresses (1/3) Info

Find elastic IP addresses by attribute or tag

Actions

Allocate Elastic IP address

Name

Allocated IPv4 address

Type

Allocation ID

Release

-

13.205.40.105

Public IP

eipalloc-09b5e682db25a9750

-

13.232.46.147

Public IP

eipalloc-04c27ee55667cbffa

-

43.204.152.175

Public IP

eipalloc-095df9657fd98a12a

View details

Release Elastic IP addresses

Associate Elastic IP address

Disassociate Elastic IP address

Update reverse DNS

Enable transfers




Disable transfers

Accept transfers

NAME : SRISTI BHOWMICK , COLLEGE ROLL : BTECH/CSE/23/095 , EXAM ROLL : 11600223120

ASSIGNMENT 14

Create a Serverless computing service.

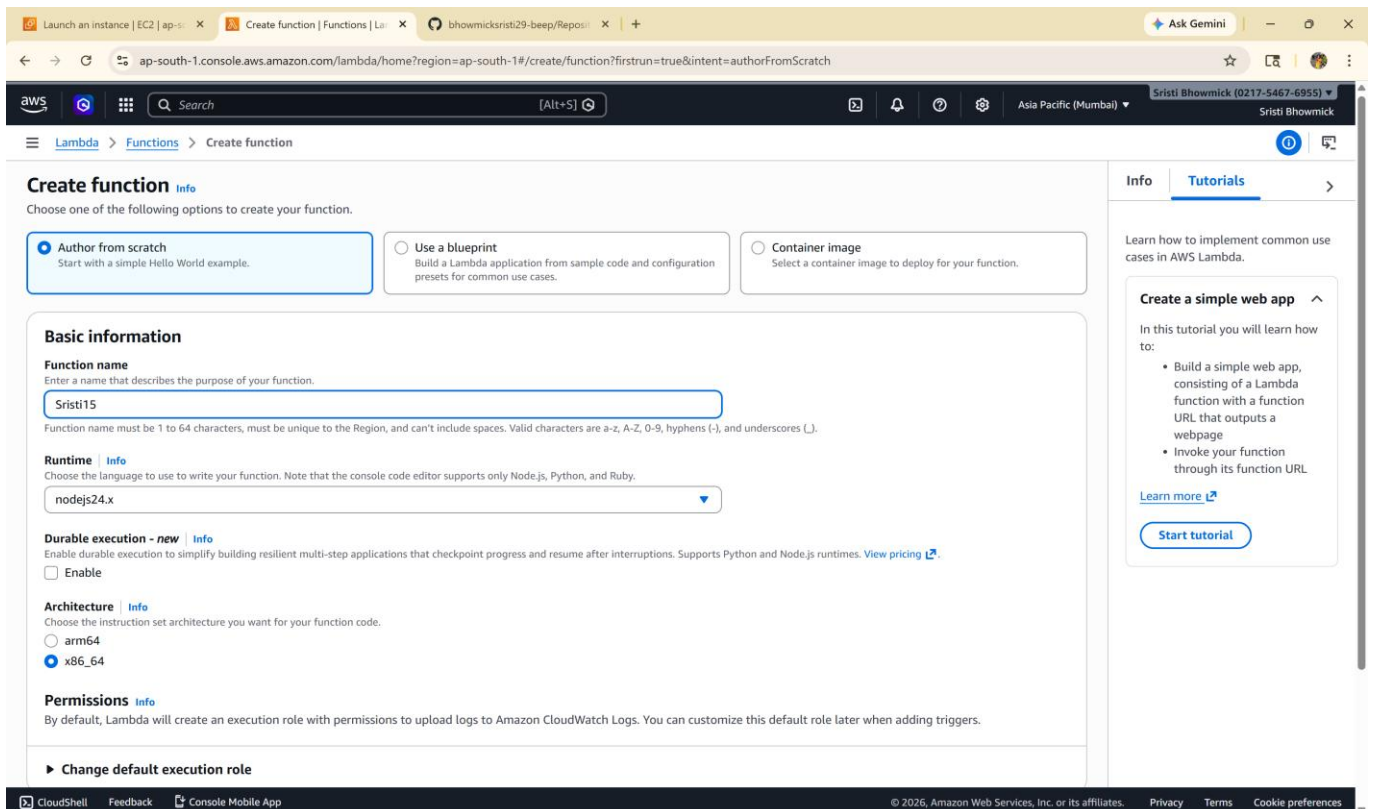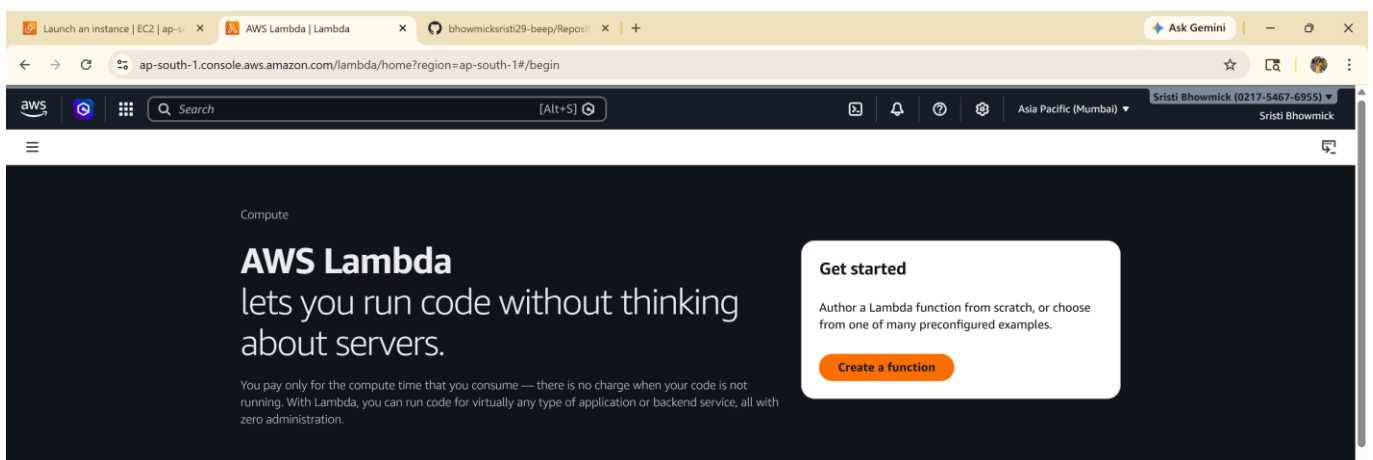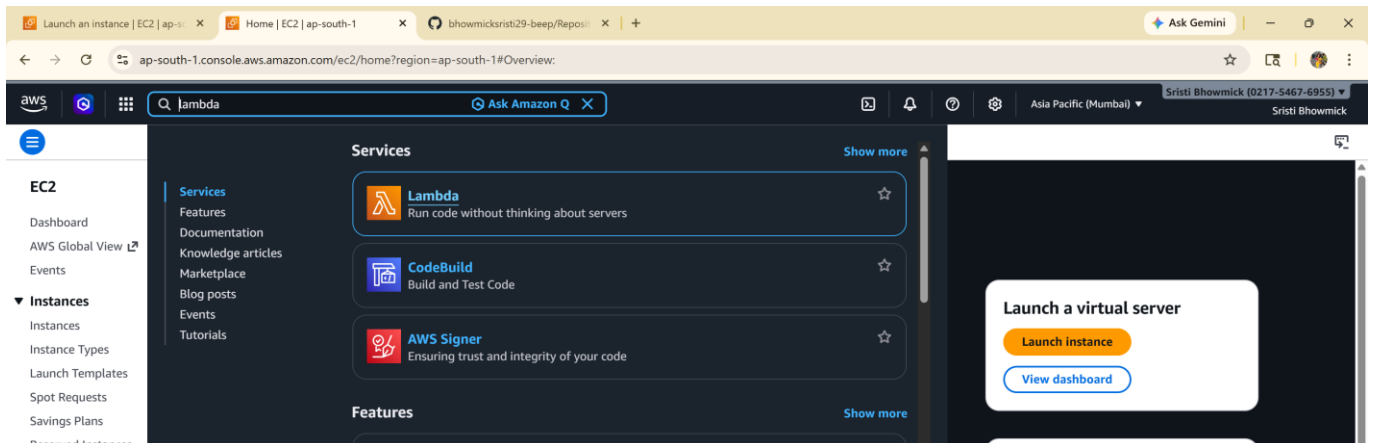

aws [Search] [Alt+S] Asia Pacific (Mumbai) Srsti Bhowmick (0217-5467-6955) Srsti Bhowmick

Lambda > Functions > Create function

Additional configurations

Use additional configurations to set up networking, security, and governance for your function. These settings help secure and customize your Lambda function deployment.

Compute type

Select a compute type: Serverless with pay-per-use pricing and automatic scaling, or Enhanced Scaling on EC2 instances with dedicated capacity and different pricing. This setting can't be changed after function creation.

☒ **Lambda (default)**
Automatically scales and runs code without server management. Pay only for the compute time you use.

☐ **Lambda managed instances - new**
Run on EC2 instances managed by Lambda with enhanced compute scaling. You must create a capacity provider first to use this option. Different pricing model applies based on EC2 usage. [View pricing](#)

Networking

Function URL [Info](#)
Use function URLs to assign HTTP(S) endpoints to your Lambda function.
☒ **Enable**

Auth type
Choose the auth type for your function URL. [Learn more](#)

☐ **AWS_IAM**
Only authenticated IAM users and roles can make requests to your function URL.

☒ **NONE**
Lambda won't perform IAM authentication on requests to your function URL. The URL endpoint will be public unless you implement your own authorization logic in your function.

Function URL permissions

When you choose auth type **NONE**, Lambda automatically creates the following resource-based policy and attaches it to your function. This policy makes your function public to anyone with the function URL. You can edit the policy later. To limit access to authenticated IAM users and roles, choose auth type **AWS_IAM**.

Info **Tutorials**

Learn how to implement common use cases in AWS Lambda.

Create a simple web app

In this tutorial you will learn how to:

- Build a simple web app, consisting of a Lambda function with a function URL that outputs a webpage
- Invoke your function through its function URL

[Learn more](#)

[Start tutorial](#)

ap-south-1.console.aws.amazon.com/lambda/home?region=ap-south-1#/create/function?firstrun=true&intent=authorFromScratch

aws [Search] [Alt+S] Asia Pacific (Mumbai) Srsti Bhowmick (0217-5467-6955) Srsti Bhowmick

Lambda > Functions > Create function

Invoke mode [Info](#)
Choose how your function returns responses. [Learn more](#)

☒ **BUFFERED (default)**
The invocation results are available when the payload is complete. Response payload max size: 6 MB

☐ **RESPONSE_STREAM**
Stream the invocation results. Streaming responses incurs additional costs. Refer to the documentation for payload size limitations. [Learn more](#)

☐ **Configure cross-origin resource sharing (CORS)**
Use CORS to allow access to your function URL from any origin. You can also use CORS to control access for specific HTTP headers and methods in requests to your function URL. By default, all origins are allowed. You can edit this after creating the function. [Learn more](#)

VPC [Info](#)
Connect your function to a VPC to access private resources during invocation.
☐ **Enable**

Security & governance

Tenant isolation mode - new [Info](#)
Enable tenant isolation mode to isolate execution environments between tenants during function invocations. Tenant isolation mode cannot be modified after function creation. [View pricing](#)

☐ **Enable**

Tenant isolation mode cannot be used with function URL. To enable tenant isolation mode, deselect function URL.

Code signing [Info](#)
Use code signing configurations to ensure that the code has been signed by an approved source and has not been altered since signing.
☐ **Enable**

Encryption with an AWS KMS customer managed key [Info](#)
By default, Lambda encrypts the .zip file archive using an AWS owned key.
☐ **Enable**

Tags [Info](#)
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources, track your AWS costs, and enforce attribute-based access control.
☐ **Enable**

[Cancel](#) [Create function](#)

Info **Tutorials**

Learn how to implement common use cases in AWS Lambda.

Create a simple web app

In this tutorial you will learn how to:

- Build a simple web app, consisting of a Lambda function with a function URL that outputs a webpage
- Invoke your function through its function URL

[Learn more](#)

[Start tutorial](#)

ap-south-1.console.aws.amazon.com/lambda/home?region=ap-south-1#/functions/Srsti15?newFunction=true&tab=code

aws [Search] [Alt+S] Asia Pacific (Mumbai) Srsti Bhowmick (0217-5467-6955) Srsti Bhowmick

Lambda > Functions > Srsti15

Successfully created the function "Srsti15". You can now change its code and configuration. To invoke your function with a test event, choose "Test".

Srsti15

[Throttle](#) [Copy ARN](#) [Actions](#)

Function overview [Info](#)

[Diagram](#) [Template](#)

Layers (0)

[+ Add trigger](#) [+ Add destination](#)

[Export to Infrastructure Composer](#) [Download](#)

Function ARN
arn:aws:lambda:ap-south-1:021754676955:function:Srsti15

Description
-

Last modified
32 seconds ago

Function URL
<https://bk2cridufbe3wxo4ez3uxsod4u0ldgyi.lambda-url.ap-south-1.on.aws/>

Code **Test** **Monitor** **Configuration** **Aliases** **Versions**

Code source [Info](#) [Open in Visual Studio Code](#) [Upload from](#)

EXPLORER


- Srsti15
 - index.mjs

```
1 export const handler = async (event) => {  
2   // TODO: Implement  
3   const response = {  
4     statusCode: 200,  
5     body: "Hello from Lambda!"  
6   }  
7   return response  
8 }
```


bk2cridufbe3wxo4ez3uxsod4u0ldgyi.lambda-url.ap-south-1.on.aws

Pretty print ☐


"Hello from Lambda!"

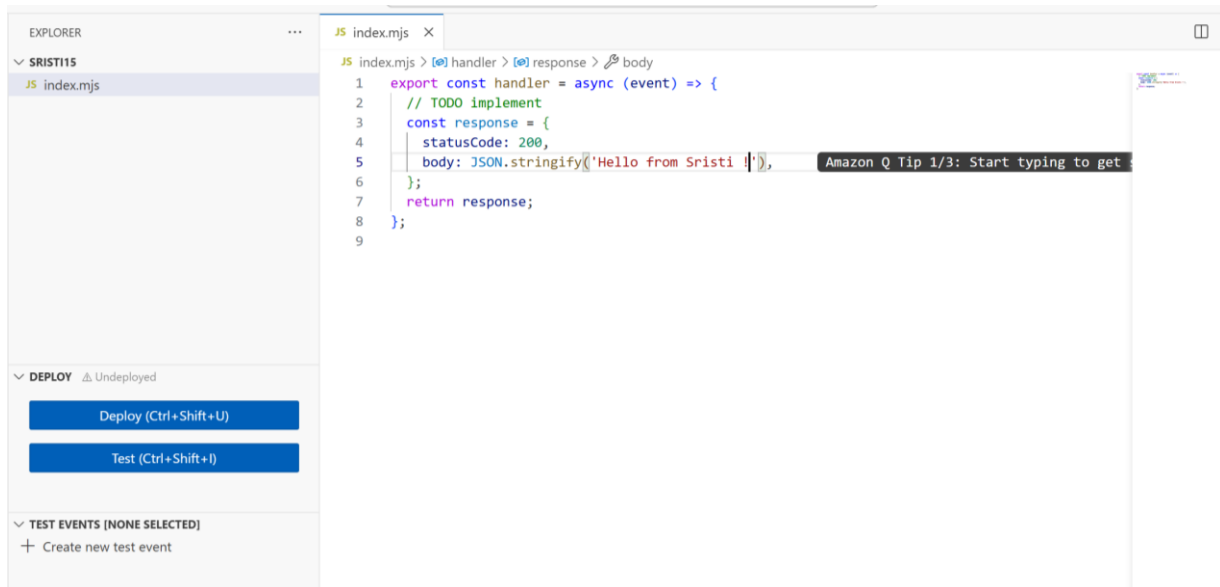

bk2cridufbe3wxo4ez3uxsod4u0ldgyi.lambda-url.ap-south-1.on.aws

Pretty print ☐

"Hello from Sristi !"

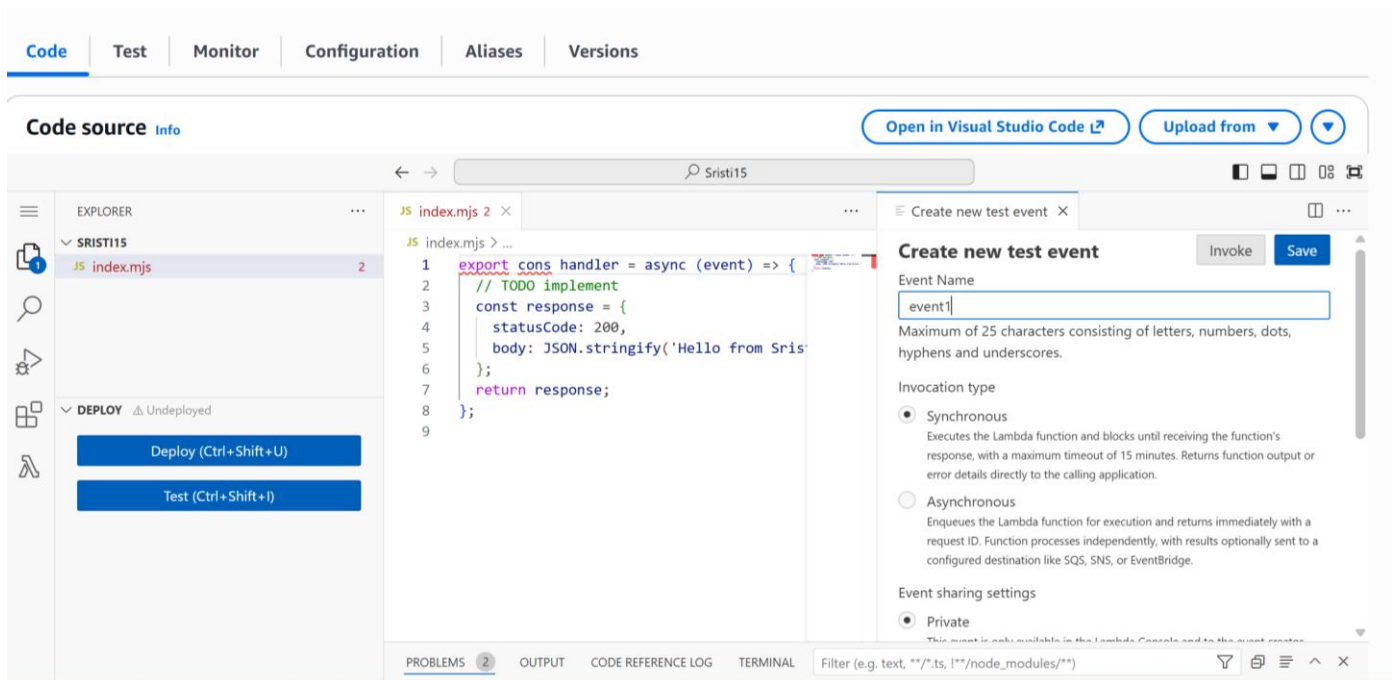

Lambda > Functions > Sristi15

The test event "event1" was successfully saved.

EXPLORER

Sristi15

index.mjs

DEPLOY Undeployed

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [SELECTED: EVENT1]

Create new test event

Private saved events

event1

ENVIRONMENT VARIABLES

Undeployed Changes

2 0

Amazon Q

index.mjs

1 export const handler = async (event) => {

2 // TODO implement

3 const response = {

4 statusCode: 200,

5 body: JSON.stringify('Hello from Sristi15');

6 };

7 return response;

8 };

9 }

Create new test event

Invoke Save

Event Name

event1

Maximum of 25 characters consisting of letters, numbers, dots, hyphens and underscores.

Invocation type

Synchronous

Executes the Lambda function and blocks until receiving the function's response, with a maximum timeout of 15 minutes. Returns function output or error details directly to the calling application.

Asynchronous

Enqueues the Lambda function for execution and returns immediately with a request ID. Function processes independently, with results optionally sent to a configured destination like SQS, SNS, or EventBridge.

Event sharing settings

Private

PROBLEMS

OUTPUT

CODE REFERENCE LOG

TERMINAL

Filter (e.g. text, "/*", "*/", "node_modules/*")

index.mjs

Declaration or statement expected. ts(1128) [Ln 1, Col 1]

Unknown keyword or identifier. Did you mean 'const'? ts(1435) [Ln 1, Col 8]

Info Tutorials

Learn how to implement common use cases in AWS Lambda.

Create a simple web app

In this tutorial you will learn how to:

Build a simple web app, consisting of a Lambda function with a function URL that outputs a webpage

Invoke your function through its function URL

Learn more

Start tutorial

Launch an instance | EC2 | ap-south-1

Sristi15 | Functions | Lambda

bk2cridufbe3w04ez3uxsod4u0

bhowmicksristi29-beep/Repos

Ask Gemini

ap-south-1.console.aws.amazon.com/lambda/home?region=ap-south-1#/functions/Sristi15?tab=code

Search [Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

Lambda > Functions > Sristi15

The test event "event1" was successfully saved.

EXPLORER

Sristi15

index.mjs

DEPLOY Undeployed

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [SELECTED: EVENT1]

Create new test event

Private saved events

event1

ENVIRONMENT VARIABLES

Undeployed Changes

0 0

Amazon Q

index.mjs

1 export const handler = async (event) => {

2 // TODO implement

3 const response = {

4 statusCode: 200,

5 body: JSON.stringify('Hello from Sristi15');

6 };

7 return response;

8 };

9 }

Create new test event

Invoke Save

Event Name

event1

Maximum of 25 characters consisting of letters, numbers, dots, hyphens and underscores.

Invocation type

Synchronous

Executes the Lambda function and blocks until receiving the function's response, with a maximum timeout of 15 minutes. Returns function output or error details directly to the calling application.

Asynchronous

Enqueues the Lambda function for execution and returns immediately with a request ID. Function processes independently, with results optionally sent to a configured destination like SQS, SNS, or EventBridge.

Event sharing settings

Private

PROBLEMS

OUTPUT

CODE REFERENCE LOG

TERMINAL

Filter (e.g. text, "/*", "*/", "node_modules/*")

No problems have been detected in the workspace.

Info Tutorials

Learn how to implement common use cases in AWS Lambda.

Create a simple web app

In this tutorial you will learn how to:

Build a simple web app, consisting of a Lambda function with a function URL that outputs a webpage

Invoke your function through its function URL

Learn more

Start tutorial

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Introducing the AWS Serverless generative AI webinar series

Join AWS Serverless experts for a hands-on workshops on Agentic AI, Intelligent Document Processing, and building real-time APIs for chatbots.

See more details

Functions (1/1)

Last fetched 08/04/2026, 15:35:27

Actions

Create function

Search by attributes or search by keyword

Function name

Description

Sristi15

Delete function

Delete function Sristi15 permanently? This action can't be undone.

Deleting a function permanently removes the function code. The related logs, roles, test event schemas, and triggers are retained in your account.

To confirm deletion, type "confirm" in the field.

confirm

Cancel Delete

