

NAME : SRISTI BHOWMICK , COLLEGE ROLL : BTECH/CSE/23/095 , EXAM ROLL : 11600223120

ASSIGNMENT NO: 12

Deploy and run the project in AWS without using the port.

Step 1: create and launch instance -> add key pair

The screenshot displays the AWS Management Console interface for the Amazon Elastic Compute Cloud (EC2) service. The top navigation bar shows the user's account information and the current region (Asia Pacific (Mumbai)). The main content area is titled "Amazon Elastic Compute Cloud (EC2)" and includes a "Launch a virtual server" button. Below this, there are two sections: "Getting started" and "Launch an instance".

The "Getting started" section provides a walkthrough for launching an instance, including a "Get started" button. The "Launch an instance" section shows a summary of the instance configuration, including the number of instances, software image (AMI), virtual server type, firewall, and storage.

Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags

Name: Sristi12

Application and OS Images (Amazon Machine Image)

Search our full catalog including 1000s of application and OS images

Summary

- Number of instances: 1
- Software Image (AMI): Canonical, Ubuntu, 24.04, amd64...read more
- Virtual server type (instance type): t3.micro
- Firewall (security group): New security group
- Storage (volumes): 1 volume(s) - 8 GiB

Launch instance

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

key2

[Create new key pair](#)

▼ Network settings [Info](#)

[Edit](#)

Network [Info](#)

vpc-0a874208a064ece04

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☐ Create security group

☒ Select existing security group

Common security groups [Info](#)

Select security groups

[Compare security group rules](#)

SristiSecurity sg-0629a8fa4d7c72b46 [×](#)

VPC: vpc-0a874208a064ece04

Security groups that you add or remove here will be added to or removed from all your network interfaces.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

EC2 > Instances > Launch an instance

For v2 requests, you must include a session token in all instance metadata requests. Applications or agents that use V1 for instance metadata access will break.

Metadata response hop limit [Info](#)
2

Allow tags in metadata [Info](#)
Select

User data - *optional* [Info](#)
Upload a file with your user data or enter it in the field.
[Choose file](#)

```
#!/bin/bash
apt-get update
apt-get install -y nginx
systemctl start nginx
systemctl enable nginx
apt-get install -y git
curl -SL https://deb.nodesource.com/setup_16.x | sudo -E bash -
apt-get install -y nodejs
git clone https://github.com/bhowmicksristi29-beep/Repository2.git
cd Repository
npm install
node index.js
```

☐ User data has already been base64 encoded

▼ Summary

Number of instances [Info](#)
1

Software Image (AMI)
Canonical, Ubuntu, 24.04, amd64...[read more](#)
ami-05d2d839d4f73aafb

Virtual server type (instance type)
t3.micro

Firewall (security group)
SristiSecurity

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#)[Launch instance](#)[Preview code](#)

aws

Search

[Alt+S]

Asia Pacific

Sristi Bhowmick (0217-5467-6955)

Sristi Bhowmick

EC2 > Instances > Launch an instance

Success
Successfully initiated launch of instance (i-079b6e1ffc94733d9)

► Launch log

Instance summary for i-079b6e1ffc94733d9 (Sristi12) [Info](#)

[Connect](#)[Instance state ▼](#)[Actions ▼](#)

Updated less than a minute ago

Instance ID



i-079b6e1ffc94733d9

Public IPv4 address



65.0.204.233 | [open address ↗](#)


Private IPv4 addresses



172.31.36.129

IPv6 address

—

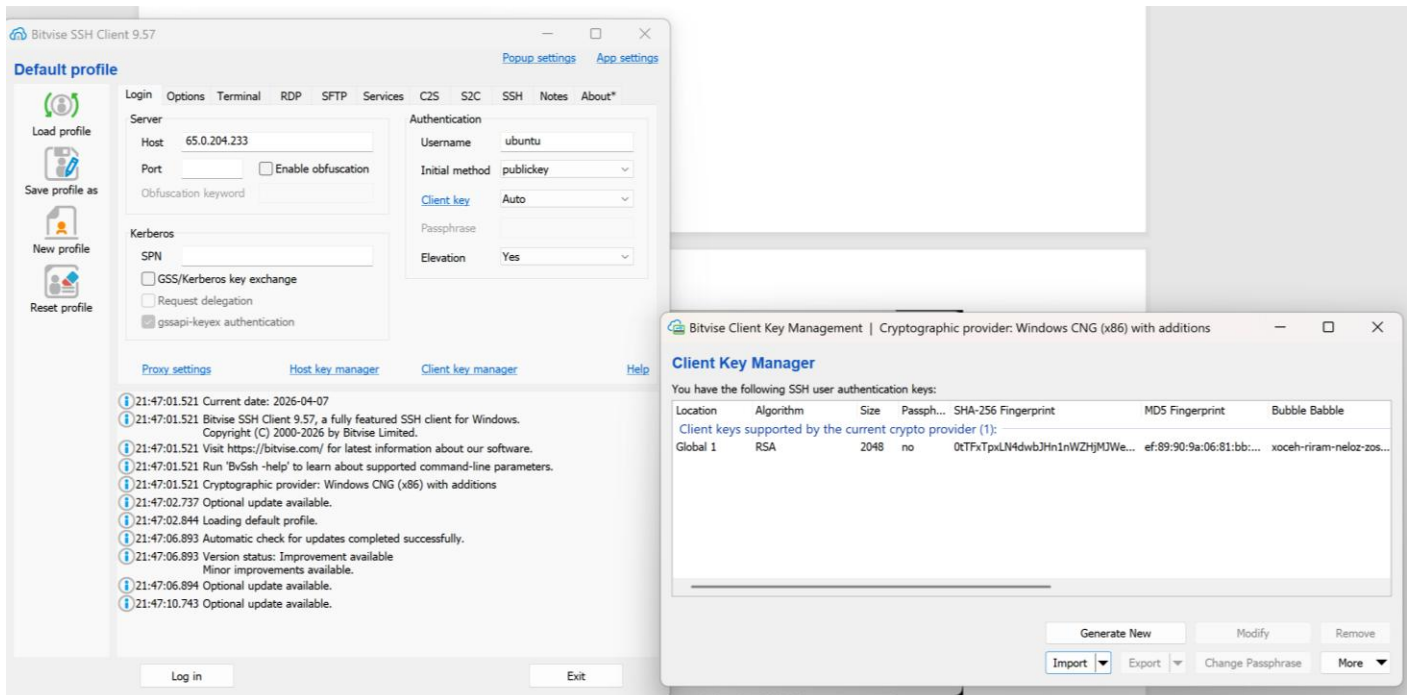

Run following commands

```
Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status
```

```
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
```

```
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.
```

```
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
```

```
ubuntu@ip-172-31-33-12:~$ pwd
/home/ubuntu
ubuntu@ip-172-31-33-12:~$ cd /
ubuntu@ip-172-31-33-12:/$ pwd
/
ubuntu@ip-172-31-33-12:/$ ls
bin          dev          lib          lost+found  opt         run         snap      tmp
bin.usr-is-merged  etc        lib.usr-is-merged  media      proc       sbin       srv       usr
boot         home        lib64        mnt        root      sbin.usr-is-merged  sys       var
ubuntu@ip-172-31-33-12:/$ cd etc/
ubuntu@ip-172-31-33-12:/etc$ cd nginx
ubuntu@ip-172-31-33-12:/etc/nginx$ ls
conf.d      koi-utf      modules-available  proxy_params  sites-enabled  win-utf
fastcgi.conf  koi-win      modules-enabled    scgi_params   snippets
fastcgi_params  mime.types  nginx.conf         sites-available  uwsgi_params
ubuntu@ip-172-31-33-12:/etc/nginx$ cd sites-available
ubuntu@ip-172-31-33-12:/etc/nginx/sites-available$ ls
default
ubuntu@ip-172-31-33-12:/etc/nginx/sites-available$ sudo nano default
```

```
GNU nano 7.2                                default *
listen 80 default_server;
listen [::]:80 default_server;

# SSL configuration
#
# listen 443 ssl default_server;
# listen [::]:443 ssl default_server;
#
# Note: You should disable gzip for SSL traffic.
# See: https://bugs.debian.org/773332
#
# Read up on ssl_ciphers to ensure a secure configuration.
# See: https://bugs.debian.org/765782
#
# Self signed certs generated by the ssl-cert package
# Don't use them in a production server!
#
# include snippets/snakeoil.conf;

root /var/www/html;

# Add index.php to the list if you are using PHP
index index.html index.htm index.nginx-debian.html;

server_name _;

#
location / {
    # First attempt to serve request as file, then
    # as directory, then fall back to displaying a 404.
    try_files $uri $uri/ =404;
#
}
```

GNU nano 7.2 default *

^G Help	^O Write Out	^W Where Is	^K Cut	^T Execute	^C Location	M-U Undo
^X Exit	^R Read File	^_ Replace	^U Paste	^J Justify	^_ Go To Line	M-E Redo

```
GNU nano 7.2                                default
# Note: You should disable gzip for SSL traffic.
# See: https://bugs.debian.org/773332
#
# Read up on ssl_ciphers to ensure a secure configuration.
# See: https://bugs.debian.org/765782
#
# Self signed certs generated by the ssl-cert package
# Don't use them in a production server!
#
# include snippets/snakeoil.conf;

root /var/www/html;

# Add index.php to the list if you are using PHP
index index.html index.htm index.nginx-debian.html;

server_name _;

location / {
    proxy_pass http://localhost:4000;
    proxy_http_version 1.1;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection 'upgrade';
    proxy_set_header Host $host;
    proxy_cache_bypass $http_upgrade;
}

#
location / {
    # First attempt to serve request as file, then
    # as directory, then fall back to displaying a 404.
    try_files $uri $uri/ =404;
#
}
```

GNU nano 7.2 default

^G Help	^O Write Out	^W Where Is	^K Cut	^T Execute	^C Location	M-U Undo
^X Exit	^R Read File	^_ Replace	^U Paste	^J Justify	^_ Go To Line	M-E Redo

← → ↻ 🌐 65.0.204.233

Hello World