

OO —

B

Please sign in

Email address

Password

☐ Remember me

Sign in

© 2017-2020


CREATING FORMS

- The `<form>` element itself is a shell or container that doesn't have any visual impact.
- We then fill the form with a collection of inputs, checkboxes, buttons, etc.



<form>

- The form element "represents a document section containing interactive controls for submitting information."
- The *action* attribute specifies WHERE the form data should be sent.
- The method attribute specifies which HTTP method should be used (don't worry about this for now)

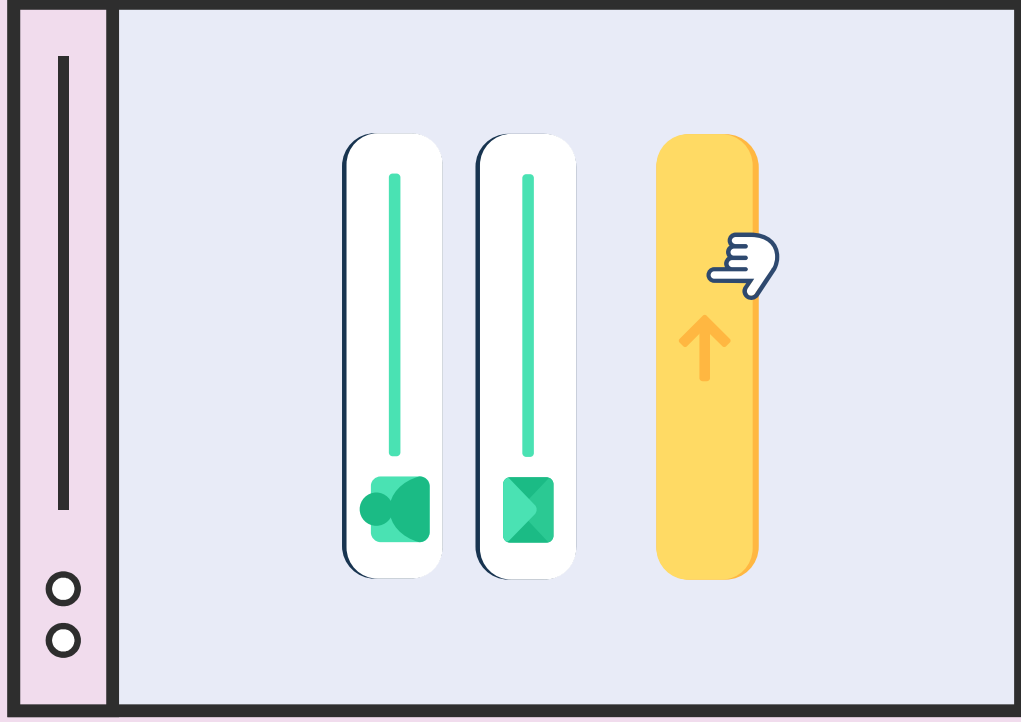

<input>

- The input element is used to create a variety of different form controls.
- We have 20+ possible types of inputs, ranging from date pickers to checkboxes.
- The *type* attribute is where the magic happens. Changing *type* dramatically alters the input's behavior and appearance.