

1) What is PHP?

PHP stands for *Hypertext Preprocessor*. It is an open source server-side scripting language which is widely used for web development. It supports many databases like MySQL, Oracle, Sybase, Solid, PostgreSQL, generic ODBC etc.

2) What is PEAR in PHP?

PEAR is a framework and *repository for reusable PHP components*. PEAR stands for **PHP Extension and Application Repository**. It contains all types of PHP code snippets and libraries.

It also provides a command line interface to install "packages" automatically.

3) Who is known as the father of PHP?

Rasmus Lerdorf

4) What was the old name of PHP?

The old name of PHP was Personal Home Page.

5) Explain the difference b/w static and dynamic websites?

In **static websites**, *content can't be changed* after running the script. You can't change anything on the site. It is predefined.

In **dynamic websites**, *content of script can be changed at the run time*. Its content is regenerated every time a user visit or reload. Google, yahoo and every search engine is the example of dynamic website.

What is "echo" in PHP?

PHP echo output one or more string. It is a language construct not a function. So the use of parentheses is not required. But if you want to pass more than one parameter to echo, the use of parentheses is required.

Syntax:

1. void echo (string \$arg1 [, string \$...])

13) What is "print" in PHP?

PHP print output a string. It is a language construct not a function. So the use of parentheses is not required with the argument list. Unlike echo, it always returns 1.

Syntax:

Advertisement

1. `int print ( string $arg)`
-

14) What is the difference between "echo" and "print" in PHP?

Echo can *output one or more string* but **print** can only *output one string and always returns 1*.

Echo is *faster than print* because it does not return any value.

15) How a variable is declared in PHP?

A PHP variable is the name of the memory location that holds data. It is temporary storage.

Syntax:

1. `$variableName=value;`
-

16) What is the difference between \$message and \$\$message?

\$message stores *variable data* while **\$\$message** is used *to store variable of variables*.

\$message stores fixed data whereas the data stored in \$\$message may be changed dynamically.

17) What are the ways to define a constant in PHP?

PHP constants are name or identifier that can't be changed during execution of the script. PHP constants are defined in two ways:

- Using `define()` function
 - Using `const()` function
-

18) What are magic constants in PHP?

PHP magic constants are predefined constants, which change based on their use. They start with a double underscore (`__`) and end with a double underscore (`__`).

19) How many data types are there in PHP?

PHP data types are used to hold different types of data or values. There are 8 primitive data types which are further categorized in 3 types:

- Scalar types

- Compound types
 - Special types
-

20) How to do single and multi line comment in PHP?

PHP single line comment is made in two ways:

- Using // (C++ style single line comment)
- Using # (Unix Shell style single line comment)

PHP multi-line comment is made by enclosing all lines within.

21) What are the different loops in PHP?

For, while, do-while and for each.

22) What is the use of count() function in PHP?

The PHP count() function is used *to count total elements in the array, or something an object.*

23) What is the use of header() function in PHP?

The header() function is used to send a raw HTTP header to a client. It must be called before sending the actual output. For example, you can't print any HTML element before using this function.

24) What does isset() function?

The isset() function checks if the variable is defined and not null.

25) Explain PHP parameterized functions.

PHP parameterized functions are functions with parameters. You can pass any number of parameters inside a function. These given parameters act as variables inside your function. They are specified inside the parentheses, after the function name. Output depends upon dynamic values passed as parameters into the function.

26) Explain PHP variable length argument function

PHP supports variable length argument function. It means you can pass 0, 1 or n number of arguments in function. To do this, you need to use 3 ellipses (dots) before the argument name. The 3 dot concept is implemented for variable length argument since PHP 5.6.

27) Explain PHP variable length argument function.

PHP supports variable length argument function. It means you can pass 0, 1 or n number of arguments.

28) What is the array in PHP?

An array is used to store multiple values in a single value. In PHP, it orders maps of pairs of keys and values. It saves the collection of the data type.

29) How many types of array are there in PHP?

There are three types of array in PHP:

1. **Indexed array:** an array with a numeric key.
 2. **Associative array:** an array where each key has its specific value.
 3. **Multidimensional array:** an array containing one or more arrays within itself.
-

30) Explain some of the PHP array functions?

There are many array functions in PHP:

- array()
 - array_change_key_case()
 - array_chunk()
 - count()
 - sort()
 - array_reverse()
 - array_search()
 - array_intersect()
-

31) What is the difference between indexed and associative array?

The indexed array holds elements in an indexed form which is represented by number starting from 0 and incremented by 1. For example:

1. `$season=array("summer","winter","spring","autumn");`

The associative array holds elements with name. For example:

1. `$salary=array("Sonoo"=>"350000","John"=>"450000","Kartik"=>"200000");`

32) How to get the length of string?

The `strlen()` function is used to get the length of the string.

33) Explain some of the PHP string functions?

There are many array functions in PHP:

- `strtolower()`
 - `strtoupper()`
 - `ucfirst()`
 - `lcfirst()`
 - `ucwords()`
 - `strrev()`
 - `strlen()`
-

34) What are the methods to submit form in PHP?

There are two methods GET and POST.

35) How can you submit a form without a submit button?

You can use JavaScript `submit()` function to submit the form without explicitly clicking any submit button.

36) What are the ways to include file in PHP?

PHP allows you to include file so that page content can be reused again. There are two ways to add the file in PHP.

1. `include`

2. require

Explain setcookie() function in PHP?

PHP setcookie() function is used to set cookie with HTTP response. Once the cookie is set, you can access it by \$_COOKIE superglobal variable.

Syntax:

1. bool setcookie (string \$name [, string \$value [, int \$expire = 0 [, string \$path
2. [, string \$domain [, bool \$secure = false [, bool \$httponly = false]]]]])

39) How can you retrieve a cookie value?

1. echo \$_COOKIE ["user"];

40) What is a session?

PHP Engine creates a logical object to preserve data across subsequent HTTP requests, which is known as session.

Sessions generally store temporary data to allow multiple PHP pages to offer a complete functional transaction for the same user.

Simply, it maintains data of an user (browser).

41) What is the method to register a variable into a session?

1. <?php
2. Session_register(\$ur_session_var);
3. ?>

42) What is \$_SESSION in PHP?

A session creates a file in a temporary directory on the server where registered session variables and their session id are stored. This data will be available to all pages on the site amid that visit.

The area of the temporary record is controlled by a setting in the php.ini document called session.save_path.

At the point when a session is begun following things happen -

Advertisement

1. PHP first makes two duplicates of one of a kind session id for that particular session of the client which is an arbitrary string of 32 hexadecimal numbers, for example, 3c7foj34c3jjhkyepop2fc937e3443.
 2. One copy of unique session id automatically sent to the user's computer for the sake of synchronization in future ahead, and one copy is being maintained at server side till the session is running.
 3. Whenever you want to access the page of website or web app, then session id of the current user will be associated with the HTTP header, and that will be compared by the session id which is being maintained at the server. After completing the comparison process, you can easily access the page of the website or web app
 4. A session ends when the user closes the browser, or after leaving the site, the server will terminate the session after a predetermined period, commonly 30 minutes duration.
-

43) What is PHP session_start() and session_destroy() function?

PHP session_start() function is used to start the session. It starts new or resumes the current session. It returns the current session if the session is created already. If the session is not available, it creates and returns new sessions.

44) What is the difference between session and cookie?

The main difference between session and cookie is that *cookies are stored on user's computer in the text file format while sessions are stored on the server side.*

Cookies can't hold multiple variables, on the other hand, Session can hold multiple variables.

You can manually set an expiry for a cookie, while session only remains active as long as browser is open.

45) Write syntax to open a file in PHP?

PHP fopen() function is used to open file or URL and returns resource. It accepts two arguments: \$filename and \$mode.

Syntax:

1. resource fopen (string \$filename , string \$mode [, bool \$use_include_path = false [, resource \$context]])
-

46) How to read a file in PHP?

PHP provides various functions to read data from the file. Different functions allow you to read all file data, read data line by line, and read data character by character.

PHP file read functions are given below:

- fread()
 - fgets()
 - fgetc()
-

47) How to write in a file in PHP?

PHP fwrite() and fputs() functions are used to write data into file. To write data into a file, you need to use w, r+, w+, x, x+, c or c+ mode.

48) How to delete file in PHP?

The unlink() function is used to delete a file in PHP.

1. bool unlink (string \$filename)
-

49) What is the method to execute a PHP script from the command line?

You should just run the PHP command line interface (CLI) and specify the file name of the script to be executed as follows.

50) How to upload file in PHP?

The move_uploaded_file() function is used to upload file in PHP.

1. bool move_uploaded_file (string \$filename , string \$destination)
-

51) How to download file in PHP?

The readfile() function is used to download the file in PHP.

int readfile (string \$filename)

1. HTML stands for

As: Hyper Text Markup Language

2. What type of language is HTML?

As: Markup Language

3. What does an HTML document describe?

As: Web pages

4. Links in HTML are defined with what tag?

As: <a>, anchor tag

5. How many heading styles are there in HTML?

As: 6 headings, h1..h6

6. How line break is given in HTML?

As: using
 tag

7. What is the use of attributes used in HTML?

As: They provide additional information for tags

8. For what purpose <hr> tag is used?

As: The <hr /> tag is used to create an horizontal rule (line).

9. What are the basic text formatting tags used in HTML?

As: for bold, <i> for italic, <u> for underline etc.

10. What is a hyperlink?

As: In web terms, a hyperlink is a reference (an address) to a resource on the web.

11. How images are displayed on web pages in HTML?

As: In HTML, images are defined with the tag. The tag is empty, which means that it contains attributes only and it has no closing tag. To display an image on a page, you need to use the src

attribute. Src stands for "source". The value of the src attribute is the URL of the image you want to display on your page.

The syntax of defining an image: ``

12. Explain `<table>` tag used in HTML?

As: Tables are defined with the `<table>` tag. A table is divided into rows (with the `<tr>` tag), and each row is divided into data cells (with the `<td>` tag). The letters td stands for "table data," which is the content of a data cell. A data cell can contain text, images, lists, paragraphs, forms, horizontal rules, tables, etc.

13. How many types of lists are available in HTML?

As: three types of lists are available `<ul>` for unordered list, `<ol>` for ordered list, `<dl>` for definition lists.

14. Explain `<form>` element used in HTML?

As: A form is an area that can contain form elements. Form elements are elements that allow the user to enter information (like text fields, text area fields, drop-down menus, radio buttons, checkboxes, etc.) in a form. A form is defined with the `<form>` tag.

15. How colors are defined in HTML?

As: HTML colors are defined using a hexadecimal (hex) notation for the combination of Red, Green, and Blue color values (RGB). The lowest value that can be given to one of the light sources is 0 (hex 00). The highest value is 255 (hex FF). Hex values are written as 3 double digit numbers, starting with a # sign.

16. Explain about frames used in HTML?

As: With frames, you can display more than one HTML document in the same browser window. Each HTML document is called a frame, and each frame is independent of the others. The disadvantages of using frames are:

- The web developer must keep track of more HTML documents
- It is difficult to print the entire page

17. How to use styles in HTML?

As: When a browser reads a style sheet, it will format the document according to it. There are three ways of inserting a style sheet:

External Style Sheet

An external style sheet is ideal when the style is applied to many pages. With an external style sheet, you can change the look of an entire Web site by changing one file. Each page must link to the style sheet using the `<link>` tag. The `<link>` tag goes inside the head section.

Internal Style Sheet

An internal style sheet should be used when a single document has a unique style. You define internal styles in the head section with the <style> tag.

18. Expand CSS.

As: Cascading Style Sheets

19. What does styles do in Style sheets ?

As: They tell how to display various elements

20. How CSS syntax is made up of?

As: The CSS syntax is made up of three parts: a selector, a property and a value:

21. What is Javascript?

As: JavaScript is THE scripting language of the Web. JavaScript is used in millions of Web pages to add functionality, validate forms, detect browsers, and much more.

22. What Javascript can do?

As: JavaScript gives HTML designers a programming tool JavaScript can put dynamic text into an HTML page JavaScript can react to events

JavaScript can read and write HTML elements –

JavaScript can be used to validate data –

JavaScript can be used to detect the visitor's browser –

JavaScript can be used to create cookies

23. What was the original name of Javascript?

As: ECMA Script (European Computers Manufacturers Association)

24. What is a Javascript statement?

As: A JavaScript statement is a command to a browser. The purpose of the command is to tell the browser what to do.

25. Explain the importance of XML?

As: XML stands for EXtensible Markup Language.

XML was designed to transport and store data.

XML is important to know, and very easy to learn.

XML tags are not predefined, user has to define the tags

26. What is the difference between XML and HTML?

As: XML is not a replacement for HTML.

XML and HTML were designed with different goals:

- XML was designed to transport and store data, with focus on what data is.
- HTML was designed to display data, with focus on how data looks.

HTML is about displaying information, while XML is about carrying information.

27. What is XML tree?

As: XML Documents Form a Tree Structure XML documents must contain a root element. This element is "the parent" of all other elements.

The elements in an XML document form a document tree. The tree starts at the root and branches to the lowest level of the tree. All elements can have sub elements (child elements):

Ex

```
<root>
```

```
  <child>
```


```
    <subchild>.....</subchild>
```

```
  </child>
```

```
</root>
```

The terms parent, child, and sibling are used to describe the relationships between elements. Parent elements have children. Children on the same level are called siblings (brothers or sisters). All elements can have text content and attributes (just like in HTML).

Example:

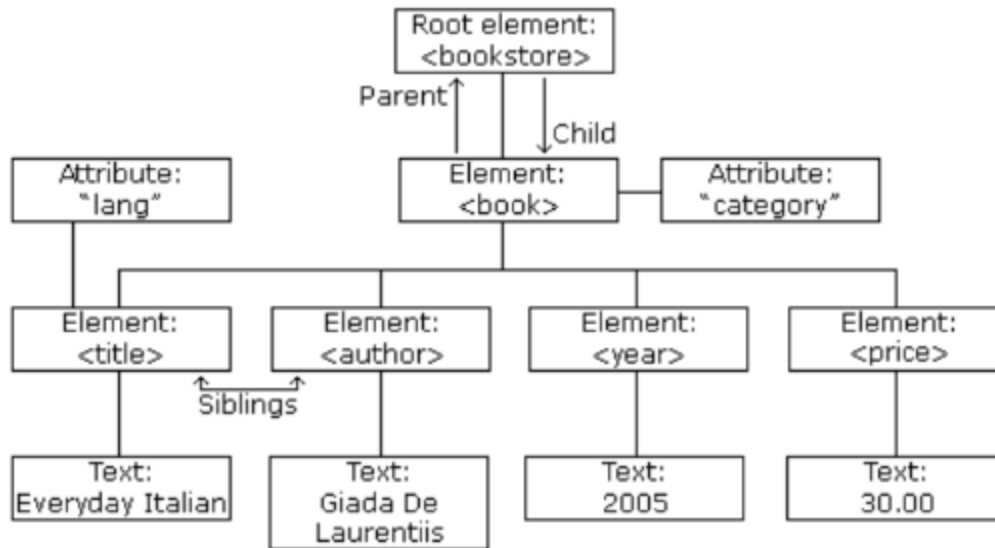

28. What are the syntax rules for XML document?

As: All XML Elements Must Have a Closing Tag

XML Tags are Case Sensitive

XML Elements Must be Properly Nested

XML Documents Must Have a Root Element

29. What is an XML Element?

As: An XML element is everything from (including) the element's start tag to (including) the element's end tag. An element can contain other elements, simple text or a mixture of both. Elements can also have attributes.

<bookstore>

<book category="CHILDREN">

<title>Harry Potter</title>

<author>J K. Rowling</author>

<year>2005</year>

<price>29.99</price>

</book>

<book category="WEB">

```
<title>Learning XML</title>
<author>Erik T. Ray</author>
<year>2003</year>
<price>39.95</price>
</book>
</bookstore>
```

In the example above, <bookstore> and <book> have element contents, because they contain other elements. <author> has text content because it contains text. In the example above only <book> has an attribute (category="CHILDREN").

30. What is a well formed XML document?

As: Well Formed XML Documents

A "Well Formed" XML document has correct XML syntax.

The syntax rules were described in the previous chapters:

- XML documents must have a root element
- XML elements must have a closing tag
- XML tags are case sensitive
- XML elements must be properly nested
- XML attribute values must be quoted

31. What is a valid XML document?

As: A "Valid" XML document is a "Well Formed" XML document, which also conforms to the rules of a Document Type Definition (DTD):

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<!DOCTYPE note SYSTEM "Note.dtd">
<note>
<to>Tove</to>
<from>Jani</from>
<heading>Reminder</heading>
<body>Don't forget me this weekend!</body>
</note>
```

The DOCTYPE declaration in the example above, is a reference to an external DTD file. The content of the file is shown in the paragraph below.

32. What is the purpose of XML DTD?

As: The purpose of a DTD is to define the structure of an XML document. It defines the structure with a list of legal elements:

33. What is PHP?

As: PHP is a powerful tool for making dynamic and interactive Web pages. PHP is the widely-used, free, and efficient alternative to competitors such as

Microsoft's ASP.

- PHP stands for PHP: Hypertext Preprocessor
- PHP is a server-side scripting language, like ASP
- PHP scripts are executed on the server
- PHP supports many databases (MySQL, Informix, Oracle, Sybase, Solid, PostgreSQL, Generic ODBC, etc.)
- PHP is an open source software
- PHP is free to download and use

34. Why PHP is popular than ASP?

As: PHP runs on different platforms (Windows, Linux, Unix, etc.) PHP is compatible with almost all servers used today (Apache, IIS, etc.) PHP is FREE to download from the official PHP resource: www.php.net PHP is easy to learn and runs efficiently on the server side

35. What is basic PHP syntax?

As: A PHP scripting block always starts with `<?php` and ends with `?>`. A PHP scripting block can be placed anywhere in the document. On servers with shorthand support enabled you can start a scripting block with `<?` and end with `?>`. For maximum compatibility, we recommend that you use the standard form (`<?php`) rather than the shorthand form.

```
<?php
```

```
?>
```

A PHP file normally contains HTML tags, just like an HTML file, and some PHP scripting code. Below, we have an example of a simple PHP script which sends the text "Hello World" to the browser:

```
<html>
```

```
<body>
```

```
<?php
```

```
echo "Hello World";
```

```
?>
```

```
</body>
```

```
</html>
```

Each code line in PHP must end with a semicolon. The semicolon is a separator and is used to distinguish one set of instructions from another.

36. Who developed PHP?

As: Rasmus Lerdorf

37. Who developed HTML and World Wide Web?

As: Tim Berners Lee

38. What is the use of HTTP protocol?

As: application-level protocol for distributed, collaborative, hypermedia information systems

- ♣ generic, stateless, object-oriented

- ♣ can be used for many tasks, such as name servers & distributed object management systems