

Exp no :03

Date :

WIRESHARK FOR PASSWORD CAPTURING


Password Capturing

Wireshark can capture not only passwords but any type of information transmitted over the network: usernames, email addresses, personal information, etc. As long as we can capture network traffic, Wireshark can sniff passing passwords.

In sniffing can include passwords for various protocols such as HTTP, FTP, Telnet, etc. the captured data can be used to troubleshoot network problems, but can also be used maliciously to gain unauthorized access to sensitive information.

So, here we will see how we can capture the password using the Wireshark network capture analyzer. and see the outputs of the following steps.

Step 1: First of all, open your Wireshark tool in your window or in Linux virtual machine. and start capturing the network. suppose I am capturing my wireless fidelity.

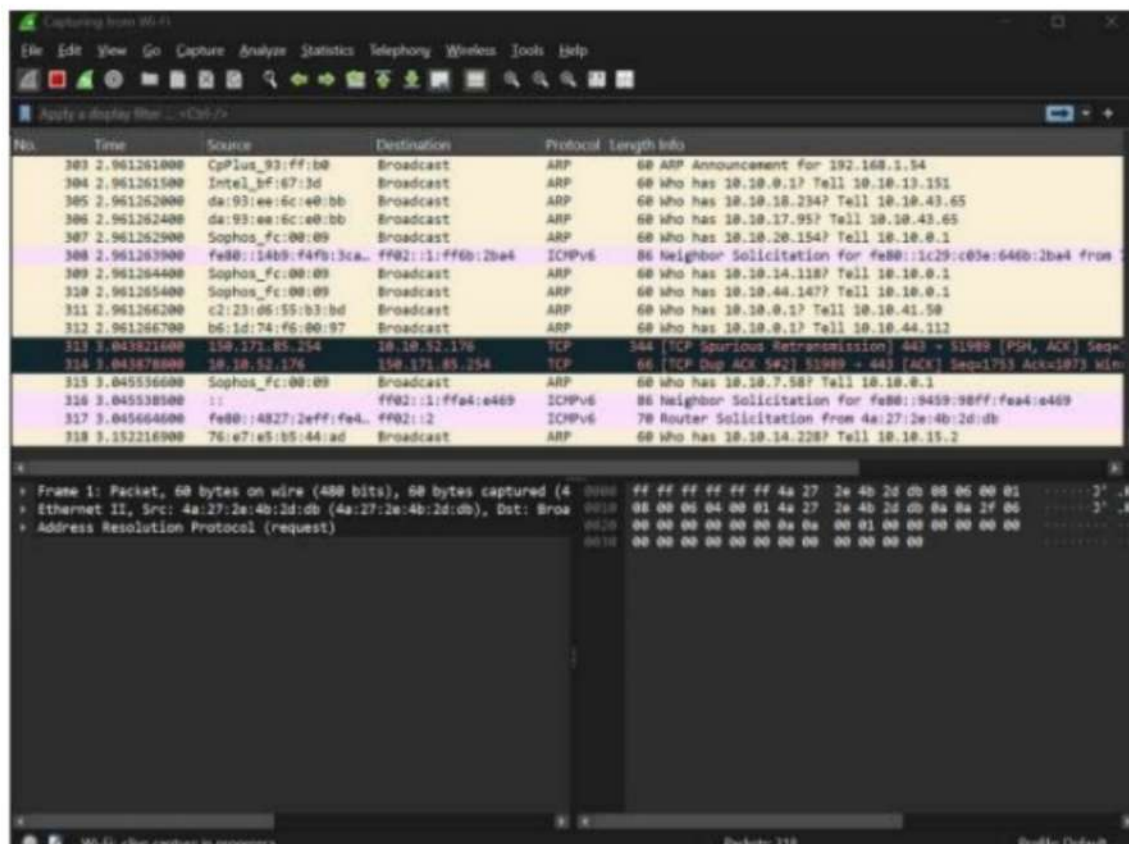

After starting the packet capturing we will go to the website and login the credential on that website as you can see in the image


Login Test

Username:

Password:


Step 3: Now after completing the login credential we will go and capture the password in Wireshark, for that we have to use some filter that helps to find the login credential through the packet capturing.

Step 4: Wireshark has captured some packets but we specifically looking for HTTP packets, so in the display filter bar we use some command to find all the captured HTTP packets, as you can http

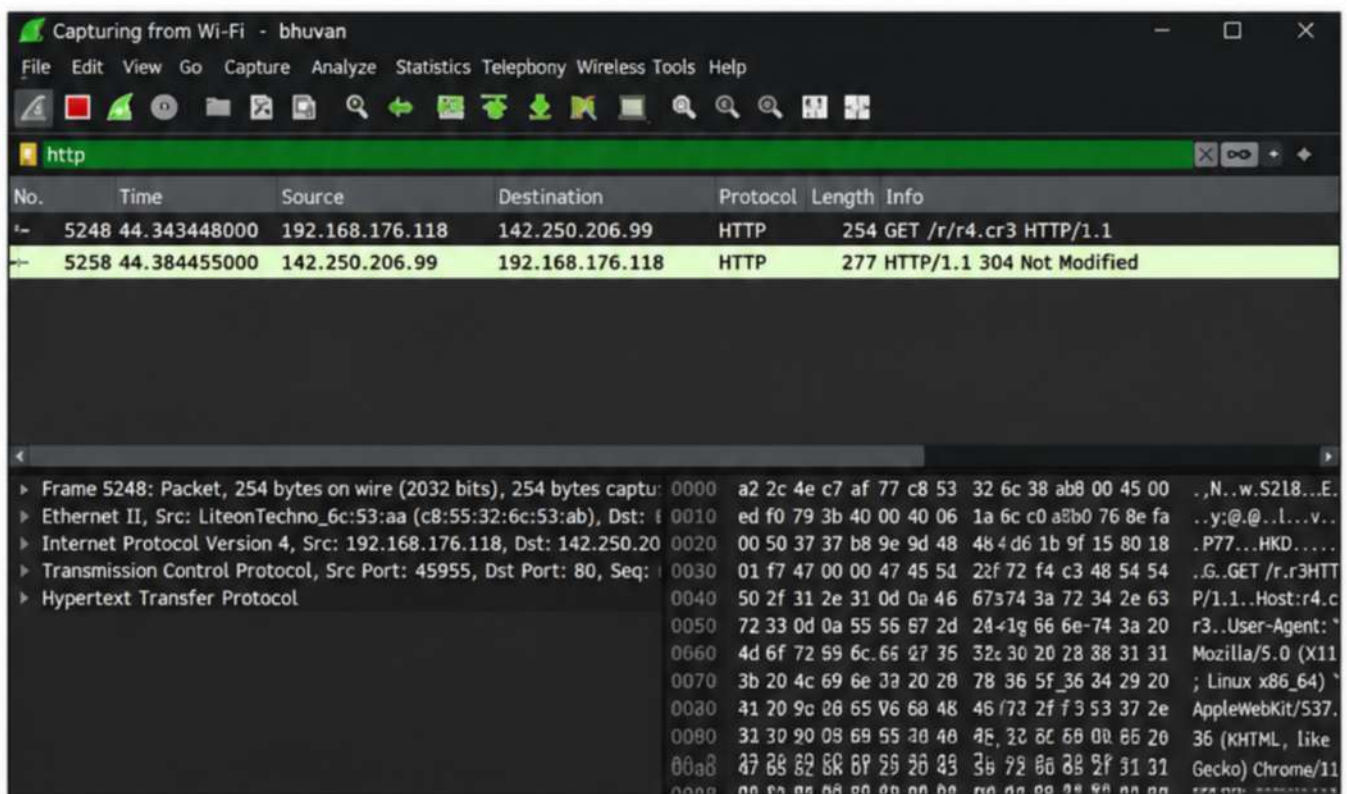

Step 5: So there are some HTTP packets are captured but we specifically looking for form data that the user submitted to the website, for that, we have a separate filter

As we know that there are main two methods used for submitting form data from web pages like login forms to the server, the methods are-GET

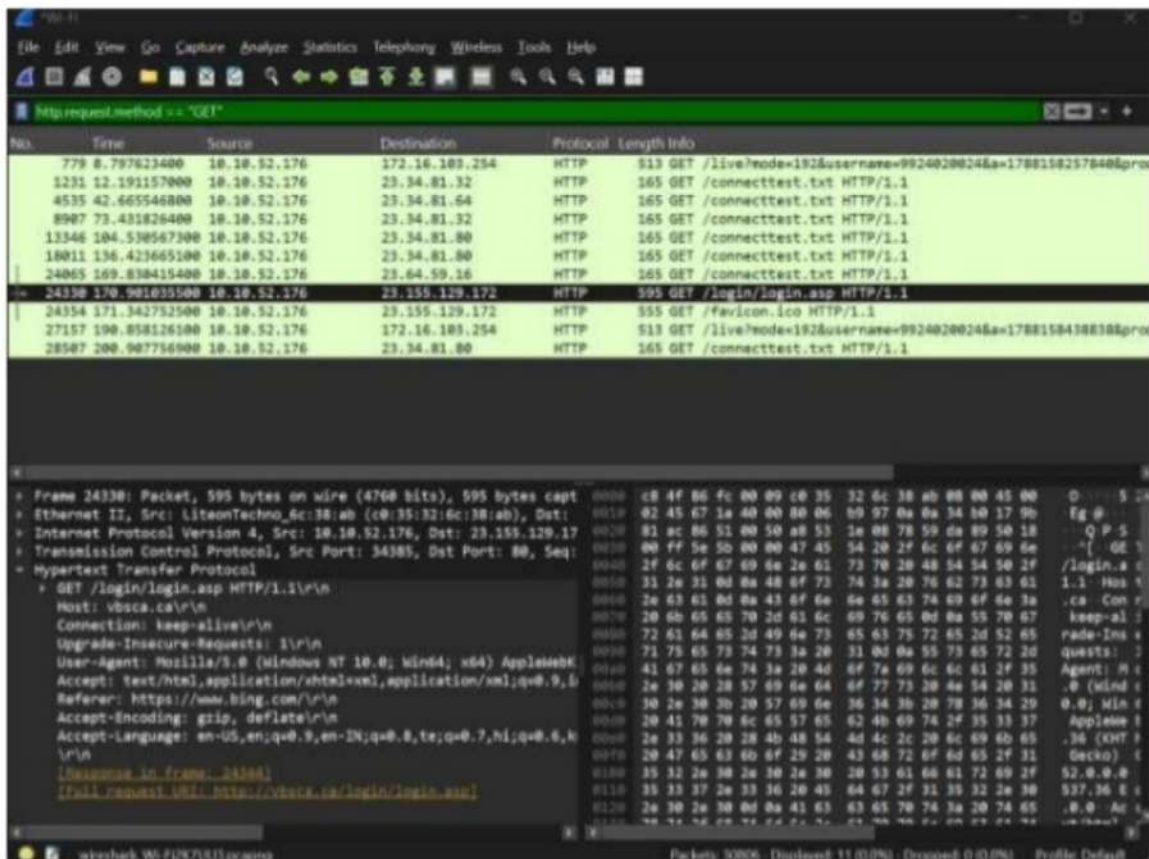

POST

Step 6: So firstly for knowing the credential we use the first method and apply the filter for the GET methods as you can see below.

http.request.method == "GET"

see in the below image the green bar where we apply the filter.


GET Method

As you can see in the image there are two packets where the login page was requested with a GET request as well, but

there is no form data submitted with a GET request.

Step 7: Now after checking the GET method if we didn't find the form data, then we will try the POST method for that we will apply the filter on Wireshark as you can see.

http.request.method == "POST"

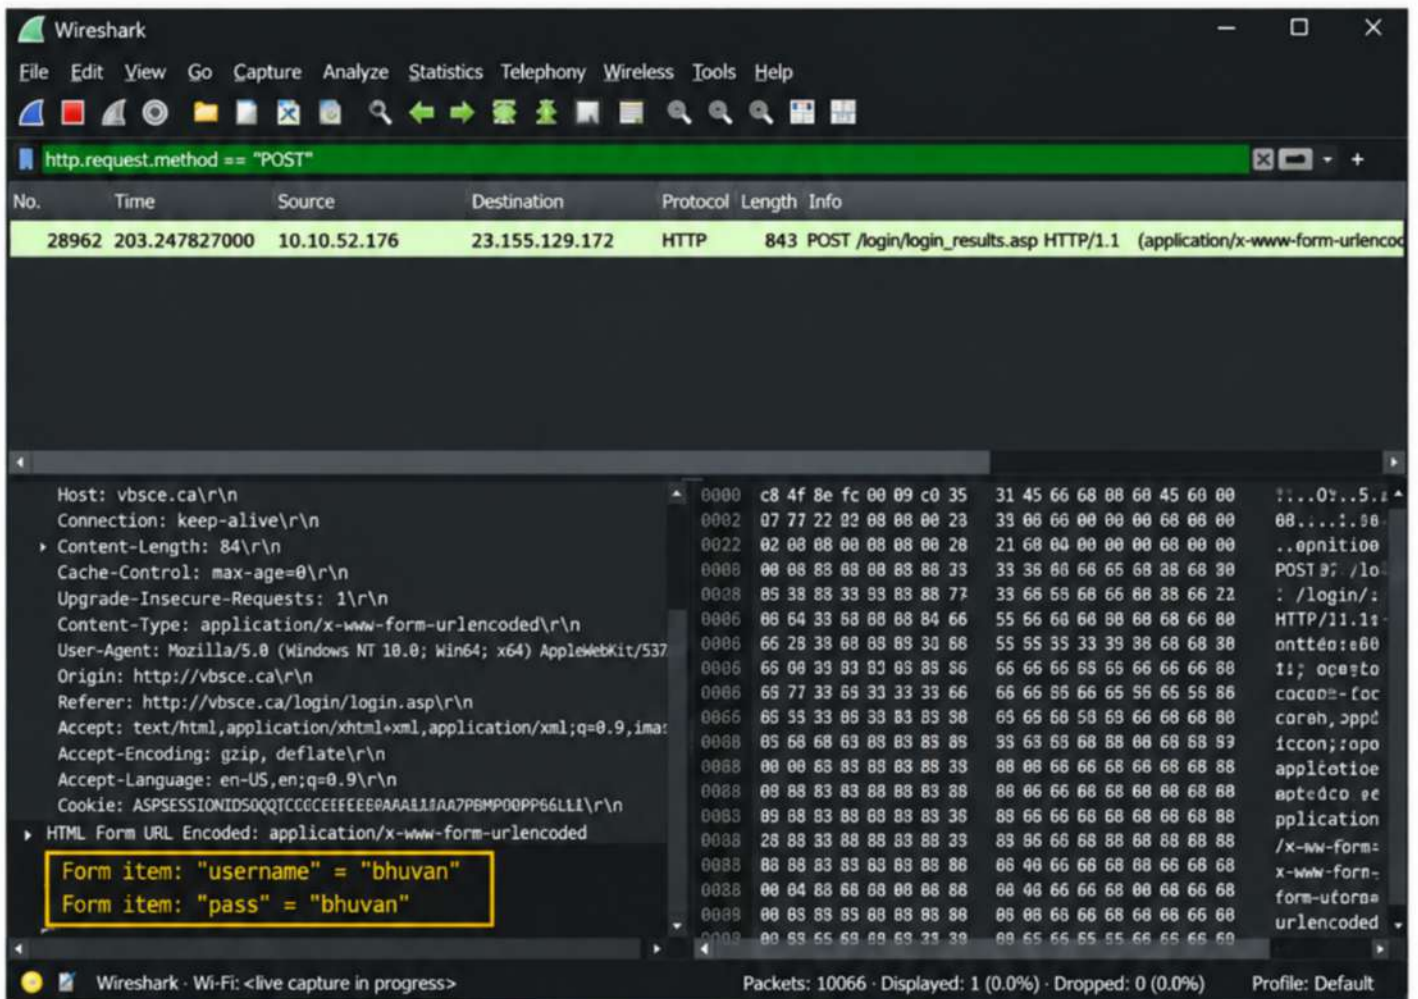

As you can see we have a packet with form data click on the packet with user info and the application URL encoded, and click on the down-

HTML form URL Encoded where the login credential is found. login credential as it is the same that we filed on the website in step 2.

Form item: "username" = "bhuvan"

Form item: "pass" = "bhuvan"

```

Cache-Control: max-age=0/*/*
Upgrade-Insecure-Requests: 1/*/*
Content-Type: application/x-www-form-urlencoded/*/*
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/102.0.0.0 Safari/537.36 http://102.0.0.0/*/*
Origin: http://vbsca.ca/*/*
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;vml;q=0.7/*/*
Referer: http://vbsca.ca/login/login.asp/*/*
Accept-encoding: gzip, deflate/*/*
Accept-language: en;q=0.9,en-US;q=0.8,fr;q=0.7,hi;q=0.6,de;q=0.5,es;q=0.4,el;q=0.3/*/*
Cookie: ASPSESSIONIDC9D7C-PCCE1F044AF696069F0/*/*
/*/*
[Session ID: 2024]
[Full request URI: http://vbsca.ca/login/login_msa/*/*]
File Data: 54 bytes
+ HTTP Form URL Encoded: application/x-www-form-urlencoded
+ Form Item: "ExtUserName" = "DADDY POTMAN"
  Key: ExtUserName
  Value: DADDY POTMAN
+ Form Item: "ExtPassword" = "SUGGESTION"
  Key: ExtPassword
  Value: SUGGESTION
0010  81 78 78 60 88 83 81 74  89 87 6a 2f 73 88 87 6a  application/signed
0020  85 84 10 60 78 83 88 81  8a 87 65 38 76 38 82 33  ed-exch ngs;vml
0030  38 71 38 38 2e 27 60 6a  52 45 66 83 72 45 72 3a  /q=0.7 Referer:
0040  38 68 78 14 78 3a 2f 2f  78 82 73 83 81 1e 83 61  http://vbsca.ca
0050  2f 81 6f 87 68 6a 2f 61  8f 87 68 6a 2e 81 73 78  /login/login.asp
0060  86 6a 41 83 83 85 78 74  2d 45 6a 63 6f 84 88 6a  Accept-encoding
0070  87 3a 38 87 7a 88 78 3c  38 84 83 88 81 74 85  g; gzip, deflate
0080  88 6a 41 83 83 85 78 74  2d 45 61 6a 67 75 81 67  Accept-language
0090  85 3a 38 65 6a 2d 53 53  3c 45 6a 78 76 38 38 2a  e; en-US, en;q=0.
0100  35 21 65 6a 1d 88 48 40  71 38 38 2a 38 31 76 83  ,en-US;q=0.5,fr
0110  38 71 3a 38 38 38 2e 27  2e 7a 81 76 72 38 2a  /q=0.7,hi;q=0.6
0120  88 6a 3a 71 3d 38 2a 53  2e 7a 81 76 72 38 2a  ,en;q=0.5,de;q=0.
0130  3a 2d 65 6a 38 71 38 38  38 53 88 6a 43 87 87 60  a,el;q=0.3 Cook
0140  88 65 1a 28 41 51 50 53  45 52 13 49 4f 4a 48 44  ie: ASPSESSIONID
0150  51 43 52 51 43 84 54 43  3d 58 43 83 45 48 44  H9G9D7C-vPCE1F0
0160  41 48 41 40 41 48 40 40  42 38 47 47 47 48 45 47  H6LAP0N-RP060P0
0170  4a 48 40 48 7a 79 14  85 73 45 72 46 81 68 61  t; text/Unspecie
0180  3a 44 10 44 44 52 2e 38  4f 3a 48 41 4a 7a 7a 78  -d883aUv-07068d8v
0190  7a 58 61 73 73 6f 72  8a 3d 53 51 4a 48 45 45  Password-d/0d8d8
0200  52 52 32 31 29 32 31 25  32 39 29 32 36  H51211N 10526

```