

Unblock Me Solver

API Documentation

July 27, 2017

Contents

Contents	1
1 Package UnblockMe	2
1.1 Modules	2
1.2 Variables	2
2 Package UnblockMe.Map	3
2.1 Modules	3
2.2 Variables	3
3 Module UnblockMe.Map.Map	4
3.1 Variables	4
3.2 Class Map	4
3.2.1 Methods	4
3.2.2 Properties	8
3.2.3 Class Variables	8
4 Module UnblockMe.Map.MapReader	9
4.1 Variables	9
4.2 Class MapReader	9
4.2.1 Methods	9
4.2.2 Properties	9
4.2.3 Class Variables	10
5 Module UnblockMe.Map.Move	11
5.1 Variables	11
5.2 Class Move	11
5.2.1 Methods	11
5.2.2 Properties	13
6 Module UnblockMe.Map.Piece	14
6.1 Variables	14
6.2 Class Piece	14
6.2.1 Methods	14
6.2.2 Properties	15
7 Package UnblockMe.PathFinder	16
7.1 Modules	16

7.2	Variables	16
8	Module UnblockMe.PathFinder.AStar	17
8.1	Variables	17
8.2	Class AStar	17
8.2.1	Methods	17
8.2.2	Properties	18
9	Module UnblockMe.PathFinder.AStarNode	19
9.1	Variables	19
9.2	Class AStarNode	19
9.2.1	Methods	19
9.2.2	Properties	20
9.2.3	Class Variables	20
10	Module UnblockMe.PathFinder.Heuristics	21
10.1	Functions	21
10.2	Variables	21
11	Module UnblockMe.PathFinder.Node	22
11.1	Variables	22
11.2	Class Node	22
11.2.1	Methods	22
11.2.2	Properties	23
12	Module UnblockMe.PathFinder.PathFinder	24
12.1	Variables	24
12.2	Class PathFinder	24
12.2.1	Methods	24
12.2.2	Properties	24
13	Module UnblockMe.PathFinder.Solver	26
13.1	Variables	26
14	Module UnblockMe.PathFinder.TreeSearch	27
14.1	Variables	27
14.2	Class TreeSearch	27
14.2.1	Methods	27
14.2.2	Properties	28
15	Package UnblockMe.Utility	29
15.1	Modules	29
15.2	Variables	29
16	Module UnblockMe.Utility.MovesTo	30
16.1	Functions	30
16.2	Variables	30
17	Module UnblockMe.Utility.Stack	31
17.1	Variables	31
17.2	Class Stack	31
17.2.1	Methods	31
17.2.2	Properties	32

18 Package UnblockMe.test	33
18.1 Modules	33
18.2 Variables	33
19 Package UnblockMe.test.MapTests	34
19.1 Modules	34
19.2 Variables	34
20 Module UnblockMe.test.MapTests.mapTests	35
20.1 Variables	35
20.2 Class FakeMapReader	35
20.2.1 Methods	35
20.2.2 Properties	35
20.3 Class TestMap	36
20.3.1 Methods	36
20.3.2 Properties	37
20.3.3 Class Variables	38
21 Module UnblockMe.test.MapTests.moveTests	39
21.1 Variables	39
21.2 Class TestMove	39
21.2.1 Methods	39
21.2.2 Properties	40
21.2.3 Class Variables	40
22 Module UnblockMe.test.MapTests.pieceTests	41
22.1 Variables	41
22.2 Class TestPiece	41
22.2.1 Methods	41
22.2.2 Properties	42
22.2.3 Class Variables	42
23 Module UnblockMe.test.MapTests.readerTests	43
23.1 Variables	43
23.2 Class TestReader	43
23.2.1 Methods	43
23.2.2 Properties	44
23.2.3 Class Variables	44
24 Package UnblockMe.test.PathFinding	45
24.1 Modules	45
24.2 Variables	45
25 Module UnblockMe.test.PathFinding.AStarNodeTests	46
25.1 Variables	46
25.2 Class NodeTest	46
25.2.1 Methods	46
25.2.2 Properties	46
25.2.3 Class Variables	47
26 Module UnblockMe.test.PathFinding.heuristicTests	48
26.1 Variables	48
26.2 Class TestMap	48

26.2.1	Methods	48
26.2.2	Properties	49
26.2.3	Class Variables	49
27	Module UnblockMe.test.PathFinding.nodeTests	50
27.1	Variables	50
27.2	Class NodeTest	50
27.2.1	Methods	50
27.2.2	Properties	50
27.2.3	Class Variables	51
28	Module UnblockMe.test.PathFinding.pathFindingTests	52
28.1	Functions	52
28.2	Variables	52
28.3	Class PathFindingTest	52
28.3.1	Methods	52
28.3.2	Properties	53
28.3.3	Class Variables	53
29	Module UnblockMe.test.files	55
29.1	Variables	55

1 Package UnblockMe

1.1 Modules

- **Map** (Section 2, p. 3)
 - **Map** (Section 3, p. 4)
 - **MapReader** (Section 4, p. 9)
 - **Move** (Section 5, p. 11)
 - **Piece** (Section 6, p. 14)
- **PathFinder** (Section 7, p. 16)
 - **AStar** (Section 8, p. 17)
 - **AStarNode** (Section 9, p. 19)
 - **Heuristics** (Section 10, p. 21)
 - **Node** (Section 11, p. 22)
 - **PathFinder** (Section 12, p. 24)
 - **Solver** (Section 13, p. 26)
 - **TreeSearch** (Section 14, p. 27)
- **Utility** (Section 15, p. 29)
 - **MovesTo** (Section 16, p. 30)
 - **Stack** (Section 17, p. 31)
- **test** (Section 18, p. 33)
 - **MapTests** (Section 19, p. 34)
 - * **mapTests** (Section 20, p. 35)
 - * **moveTests** (Section 21, p. 39)
 - * **pieceTests** (Section 22, p. 41)
 - * **readerTests** (Section 23, p. 43)
 - **PathFinding** (Section 24, p. 45)
 - * **AStarNodeTests** (Section 25, p. 46)
 - * **heuristicTests** (Section 26, p. 48)
 - * **nodeTests** (Section 27, p. 50)
 - * **pathFindingTests** (Section 28, p. 52)
 - **files** (Section 29, p. 55)

1.2 Variables

Name	Description
<code>--package--</code>	Value: None

2 Package UnBlockMe.Map

2.1 Modules

- **Map** (*Section 3, p. 4*)
- **MapReader** (*Section 4, p. 9*)
- **Move** (*Section 5, p. 11*)
- **Piece** (*Section 6, p. 14*)

2.2 Variables

Name	Description
<code>--package--</code>	Value: None

3 Module UnblockMe.Map.Map

3.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnblockMe.Map'</code>

3.2 Class Map



3.2.1 Methods

`__init__(self, graph, delimiter='\n', setUp=True)`

Initialize the class by setting the graph and delimiters variables.

Parameters

graph: Represents the board that the game will be played on
(*type=string | MapReader*)

delimiter: how to split the string
(*type=string*)

Overrides: `object.__init__`

`convertToMap(self)`

Convert the graph into a matrix that can be viewed and modified.

`setUpPieces(self)`

Find every piece available in the board and add it to an array to keep track of them for future use.

`setUp(self)`

Set up the Map class and set the graph by either getting a a string from either a map reader or string as the graph and breaking if not valid.

isWallOrGoal(*self, point, num_goals_found*)

This will check if the point is a wall or goal and if not return False. Additionally, it will update the number of goals that have been found.

Parameters

point: the point being checked in the graph.
(type=character)

num_goals_found: number of goals in the graph currently found
(type=integer)

Return Value

if the point is a wall or a goal and number of goals currently found
(type=boolean, integer)

largeRowValid(*self, row_index, num_goals_found*)

This will test on the larger rows to see if it is valid. A larger row indicates that it is either the top or the bottom of the graph.

Parameters

row_index: index for the row to be checked
(type=integer)

num_goals_found: the number of goals that have been found
(type=integer)

Return Value

If a large row provided is valid and number of goals currently found
(type=boolean, integer)

numColumnsMatch(*self*)

Ensure that the number of columns matches for each row.

Return Value

if the number of columns matches for each row
(type=boolean)

topBottomRowsValid(*self, num_goals_found*)

Make sure that both the top and bottom rows are valid according to the topBottomRowsValid function.

Parameters

num_goals_found: number of goals presently found
(type=integer)

Return Value

If the top and bottom rows are valid and number of goals currently found
(type=boolean, integer)

midRowsValid(*self*, *num_goals_found*)

Ensure that all the middle rows are valid entries with walls or a goal on both sides.

Parameters

num_goals_found: number of goals presently found
(*type=integer*)

Return Value

if the middle rows are valid and the number of goals currently found
(*type=boolean, integer*)

playerFound(*self*)

Check to see if the player, defined in Map.py, is in the map.

Return Value

player found in map
(*type=boolean*)

isValid(*self*)

Test if the graph in the map class is valid or not.

Return Value

graph is valid or not
(*type=boolean*)

validAdditionMoves(*self*, *move*)

This will handle move verificatin for moving to the right or down in the board. It will return an array of the the moves that can be made in the direction given.

Parameters

move: Array of moves in the direction of the move given
(*type=[Move]*)

validSubtractionMoves(*self*, *move*)

This will handle move verificatin for moving to the left or up in the board. It will return an array of the the moves that can be made in the direction given.

Parameters

move: Array of moves in the direction of the move given
(*type=[Move]*)

isValidMove(*self*, *move*)

Check if the move given is valid or not to make the move.

Return Value

if the move is valid or not
(*type=boolean*)

makeConfidentMove(*self*, *move*)

Make a move on the board without checking for its validity.

Parameters

move: move to make on the board
(*type=Move*)

makeMove(*self*, *move*)

Make a move on the board. Raise syntax error on bad move given

Parameters

move: move to make on the board
(*type=Move*)

getMoves(*self*)

Get the moves available on the board.

Return Value

Array of moves available
(*type=[Move]*)

isSolved(*self*)

If there is a goal found then the board is not solved. Complete checking is done as there may be a goal in any location.

Return Value

if the game has been solved or not
(*type=boolean*)

copy(*self*)

Create a copy of this map and return it

Return Value

Copy of this map
(*type=Map*)

copyMove(*self*, *move*)

Create a copy of the map and make a move on it; return the result.

Parameters

move: move to be made on copied board
(*type=Move*)

Return Value

The new map with the move made on it
(*type=Map*)

copyConfidentMove(*self*, *move*)

Create a copy of the map and make a move on it without checking for its validity. Return the result.

Parameters

move: move to be bade on copied board
(*type=Move*)

Return Value

The new map with the move made on it
(*type=Map*)

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

3.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

3.2.3 Class Variables

Name	Description
wall	Value: ' '
goal	Value: '\$'
empty	Value: '0'
player	Value: '**'
playerPiece	Value: '*'

4 Module UnblockMe.Map.MapReader

4.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnblockMe.Map'</code>

4.2 Class MapReader



4.2.1 Methods

<code>--init--(self)</code>
Initialize MapReader class
Overrides: <code>object.--init--</code>

<code>load(self, file_name)</code>
Set flags and test if the file given exists. Throws IOError on file not existing.
Parameters
<code>file_name</code>: Name of the file that contains definition of the map.
<i>(type=string)</i>

<code>get(self)</code>
Read the file and return the string inside
Return Value
string inside of the specified file
<i>(type=string)</i>

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--hash--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,
`--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

4.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

4.2.3 Class Variables

Name	Description
loaded	Value: False
file_found	Value: False

5 Module UnblockMe.Map.Move

5.1 Variables

Name	Description
<code>--package--</code>	Value: None

5.2 Class Move



5.2.1 Methods

<code>--init--</code> (<i>self</i> , <i>piece</i> , <i>right</i> , <i>up</i>)
Initialize data structure with required variables. Throws an error on incorrect value ranges and types given
Parameters
<i>piece</i> : The piece to be moved (<i>type=character</i>)
<i>right</i> : If the piece should be to the right by a space (<i>type=integer</i>)
<i>up</i> : If the piece should be moved up by a space (<i>type=integer</i>)
Overrides: <code>object.--init--</code>

<code>isValid</code> (<i>self</i>)
Ensure that the move is valid for the board and the piece is a character.

equals(*self*, *move*)

Test whether the two moves are equal.

Parameters

move: Move being tested for equality
(*type=Move*)

Return Value

Whether the two moves are equal
(*type=boolean*)

toStr(*self*)

Convert self to string.

Return Value

String representation of the move
(*type=str*)

left(*piece*, *size=1*)

Instantiate a move that will go left

Parameters

piece: Character that represents the piece to be moved
(*type=character*)

right(*piece*, *size=1*)

Instantiate a move that will go right

Parameters

piece: Character that represents the piece to be moved
(*type=character*)

up(*piece*, *size=1*)

Instantiate a move that will go up

Parameters

piece: Character that represents the piece to be moved
(*type=character*)

down (<i>piece</i> , <i>size=1</i>)
--

Instantiate a move that will go down

Parameters

<p>piece: Character that represents the piece to be moved <i>(type=character)</i></p>

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,
`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

5.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

6 Module UnblockMe.Map.Piece

6.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnblockMe.Map'</code>

6.2 Class Piece



6.2.1 Methods

<code>--init--</code> <i>(self, x, y, vertical)</i>
Initialize piece class
Parameters
x: x coordinate <i>(type=integer)</i>
y: y coordinate <i>(type=integer)</i>
vertical: marks whether this piece can move vertically or not <i>(type=boolean)</i>
Overrides: <code>object.--init--</code>

<code>move</code> <i>(self, move)</i>
Move the piece if the given move is valid
Parameters
move: Move that will change the location of the piece <i>(type=Move)</i>

copy (<i>self</i>)

Create a copy of self.

Return Value

Copy of this piece

<i>(type=Piece)</i>

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
 __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

6.2.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

7 Package UnblockMe.PathFinder

7.1 Modules

- **AStar** (*Section 8, p. 17*)
- **AStarNode** (*Section 9, p. 19*)
- **Heuristics** (*Section 10, p. 21*)
- **Node** (*Section 11, p. 22*)
- **PathFinder** (*Section 12, p. 24*)
- **Solver** (*Section 13, p. 26*)
- **TreeSearch** (*Section 14, p. 27*)

7.2 Variables


Name	Description
<code>--package--</code>	Value: None

8 Module UnblockMe.PathFinder.AStar

8.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnblockMe.PathFinder'</code>

8.2 Class AStar

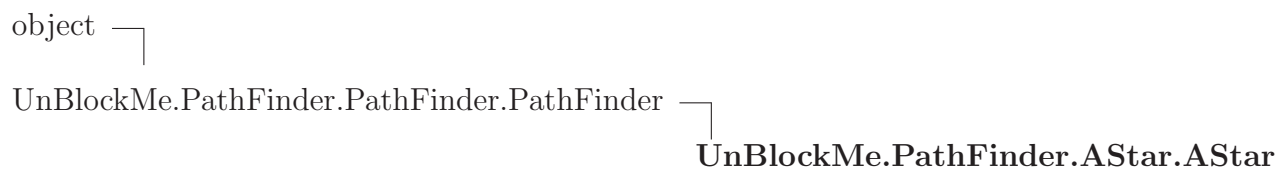

8.2.1 Methods

populateQueue (<i>self</i> , <i>graph</i> , <i>queue</i> , <i>parent</i>)
Populate the priority queue with nodes and their cost.
Parameters
graph: Graph to get moves from to populate queue (<i>type</i> = <i>Map</i>)
queue: Queue with nodes being added to it with the cost (<i>type</i> = <i>Queue</i>)
parent: Parent for the nodes that will be created (<i>type</i> = <i>AStarNode</i>)
getPath (<i>self</i> , <i>heuristic</i>)
Get the best path to solve the given graph.
Return Value
Array of moves which represent the path found to solve the puzzle (<i>type</i> = <i>[Move]</i>)
Overrides: <code>UnblockMe.PathFinder.PathFinder.PathFinder.getPath</code>

Inherited from UnblockMe.PathFinder.PathFinder.PathFinder(Section 12.2)

`--init--()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

8.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

9 Module UnblockMe.PathFinder.AStarNode

9.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnblockMe.PathFinder'</code>

9.2 Class AStarNode



9.2.1 Methods

<code>--init--</code> <i>(self, graph, move, parent, g, h)</i>
Initialize AStarNode class
Parameters
graph: Map that moves can be made on <i>(type=Map)</i>
move: Move that resulted in the above graph <i>(type=Move)</i>
parent: Parent node of this. Contains previous moves to get the current board. <i>(type=AStarNode)</i>
g: Step cost for this node <i>(type=number)</i>
h: Heuristic cost for this node <i>(type=number)</i>
Overrides: <code>object.__init__</code>

cost(<i>self</i>) <hr/> Cost for this node. Return Value The cost to get to this state (<i>type=number</i>)

Inherited from UnblockMe.PathFinder.Node.Node(Section 11.2)

reconstructPath()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

9.2.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

9.2.3 Class Variables

Name	Description
g	Value: 0
h	Value: 0

10 Module `UnBlockMe.PathFinder.Heuristics`

10.1 Functions

<code>manhattan(<i>x1</i>, <i>y1</i>, <i>x2</i>, <i>y2</i>)</code>
--

<code>euclidian(<i>x1</i>, <i>y1</i>, <i>x2</i>, <i>y2</i>)</code>
--

10.2 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.PathFinder'</code>

11 Module UnblockMe.PathFinder.Node

11.1 Variables

Name	Description
<code>--package--</code>	Value: None

11.2 Class Node



Known Subclasses: UnblockMe.PathFinder.AStarNode.AStarNode

11.2.1 Methods

<code>--init--(self, graph, move, parent)</code> Initialize AStarNode class Parameters graph: Map that moves can be made on (<i>type=Map</i>) move: Move that resulted in the above graph (<i>type=Move</i>) parent: Parent node of this. Contains previous moves to get the current board. (<i>type=Node</i>) Overrides: object. <code>--init--</code>
<code>reconstructPath(self)</code> Construct the path from here that it took to make it here. Return Value array of moves to get to this point from the root node (<i>type=[Move]</i>)

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,
`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

11.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

12 Module *UnBlockMe.PathFinder.PathFinder*

12.1 Variables

Name	Description
<code>--package--</code>	Value: None

12.2 Class *PathFinder*

object └─ ***UnBlockMe.PathFinder.PathFinder.PathFinder***

Known Subclasses: *UnBlockMe.PathFinder.TreeSearch.TreeSearch*, *UnBlockMe.PathFinder.AStar.AStar*

12.2.1 Methods

<code>--init--(self, board)</code>
Initialize Pathfinder class instance.
Parameters
board: board to be solved
<i>(type=Map)</i>
Overrides: <i>object.--init--</i>

<code>getPath(self)</code>
Get the best path to solve the given graph.
Return Value
Array of moves which represent the path found to solve the puzzle
<i>(type=[Move])</i>

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--hash--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,
`--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

12.2.2 Properties

Name	Description
<i>Inherited from object</i>	

continued on next page

Name	Description
__class__	

13 Module `UnBlockMe.PathFinder.Solver`

13.1 Variables

Name	Description
<code>--package--</code>	Value: None

14 Module **UnBlockMe.PathFinder.TreeSearch**

14.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.PathFinder'</code>

14.2 Class **TreeSearch**

object

UnBlockMe.PathFinder.PathFinder.PathFinder

UnBlockMe.PathFinder.TreeSearch.TreeSearch

14.2.1 Methods

<code>--init--</code> (<i>self</i> , <i>board</i> , <i>bfs</i> = True)
Initialize TreeSearch class.
Parameters
board: Map to be solved (<i>type</i> = <i>Map</i>)
bfs: Whether this class will use breadth-first search or depth-first search (<i>type</i> = <i>boolean</i>)
Return Value
Initialized TreeSearch class (<i>type</i> = <i>TreeSearch</i>)
Overrides: object. <code>--init--</code>

populateQueue(*self*, *graph*, *move*, *queue*, *parent*)

Populate the queue with nodes and their cost.

Parameters

graph: Graph to get moves from to populate queue
(type=Map)

move: Move to get to the
(type=Move)

queue: Stack with nodes being added to it with the cost
(type=Queue)

parent: Parent for the nodes that will be created
(type=Node)

getPath(*self*)

Get the best path to solve the given graph.

Return Value

Array of moves which represent the path found to solve the puzzle
(type=[Move])

Overrides: *UnBlockMe.PathFinder.PathFinder.PathFinder.getPath*

Inherited from object

__delattr__(), *__format__()*, *__getattr__()*, *__hash__()*, *__new__()*, *__reduce__()*, *__reduce_ex__()*,
__repr__(), *__setattr__()*, *__sizeof__()*, *__str__()*, *__subclasshook__()*

14.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<i>__class__</i>	

15 Package UnblockMe.Utility

15.1 Modules

- **MovesTo** (*Section 16, p. 30*)
- **Stack** (*Section 17, p. 31*)

15.2 Variables

Name	Description
--package--	Value: None

16 Module UnBlockMe.Utility.MovesTo

16.1 Functions

toGraphs(*board*, *path*)

Get a list of all the board positions that result in a solved board.

Parameters

board: Board to run path on

(*type*=*Map*)

path: Array of moves to generate boards

(*type*=*[Move]*)

Return Value

Array of string representation of boards

(*type*=*[string]*)

16.2 Variables

Name	Description
--package--	Value: None

17 Module UnblockMe.Utility.Stack

17.1 Variables

Name	Description
<code>--package--</code>	Value: None

17.2 Class Stack



17.2.1 Methods

`--init--`(*self*)

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature

Overrides: `object.__init__` `extit`(inherited documentation)

`put`(*self*, *obj*)

Put object into stack.

Parameters

`obj`: object to be placed into the stack

(*type=any type*)

`get`(*self*)

Gets the most recent item and pops it.

rtype: any type

Return Value

Object from stack that was popped.

empty(*self*)

Checks whether this stack is empty or not

Return Value

Stack is empty

*(type=boolean)****Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,
`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**17.2.2 Properties**

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

18 Package UnblockMe.test

18.1 Modules

- **MapTests** (*Section 19, p. 34*)
 - **mapTests** (*Section 20, p. 35*)
 - **moveTests** (*Section 21, p. 39*)
 - **pieceTests** (*Section 22, p. 41*)
 - **readerTests** (*Section 23, p. 43*)
- **PathFinding** (*Section 24, p. 45*)
 - **AStarNodeTests** (*Section 25, p. 46*)
 - **heuristicTests** (*Section 26, p. 48*)
 - **nodeTests** (*Section 27, p. 50*)
 - **pathFindingTests** (*Section 28, p. 52*)
- **files** (*Section 29, p. 55*)

18.2 Variables

Name	Description
--package--	Value: None

19 Package UnBlockMe.test.MapTests

19.1 Modules

- **mapTests** (*Section 20, p. 35*)
- **moveTests** (*Section 21, p. 39*)
- **pieceTests** (*Section 22, p. 41*)
- **readerTests** (*Section 23, p. 43*)

19.2 Variables

Name	Description
<code>--package--</code>	Value: None

20 Module UnblockMe.test.MapTests.mapTests

20.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'UnblockMe.test.MapTests'</code>

20.2 Class FakeMapReader

object —
UnblockMe.test.MapTests.mapTests.FakeMapReader

Fake object with method and member similar to mapreader class that the map class relies on

20.2.1 Methods

```
__init__(self)
x.__init__(...) initializes x; see help(type(x)) for signature
Overrides: object.__init__ extit(inherited documentation)
```

```
get(self)
```


Inherited from object

```
__delattr__(), __format__(), __getattribute__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()
```

20.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

20.3 Class *TestMap*

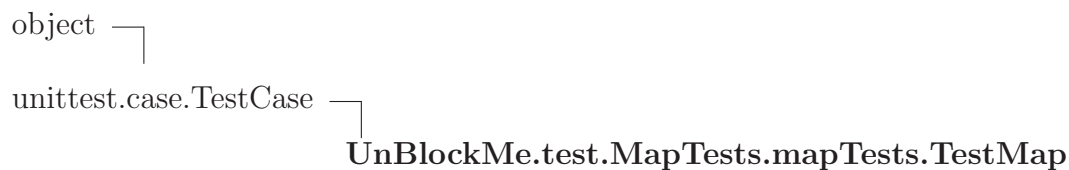

20.3.1 Methods

test_setUpPieces(*self*)

test_init(*self*)

test_convertToMap(*self*)

test_setUp(*self*)

test_isWallOrGoal(*self*)

test_largeRowValid(*self*)

test_numColumnsMatch(*self*)

test_topBottomRowsValid(*self*)

test_midRowsValid(*self*)

test_playerFound(*self*)

test_isValid(*self*)

validate_move(*self*, *move1*, *move2*)

validate_moves(*self*, *moves1*, *moves2*)

test_isValidMove(*self*)

test_makeConfidentMove(*self*)

`test_makeMove(self)``test_getMoves(self)``test_isSolved(self)``test_copy(self)``test_copyMove(self)``test_copyConfidentMove(self)``test_validSubractionMoves(self)``test_validAdditionMoves(self)`***Inherited from unittest.case.TestCase***

`__call__()`, `__eq__()`, `__hash__()`, `__init__()`, `__ne__()`, `__repr__()`, `__str__()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__setattr__()`, `__sizeof__()`, `__subclasshook__()`

20.3.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

20.3.3 Class Variables

Name	Description
sample_string	Value: ' \n 000 \n **0\$\n ',
default_delimeter	Value: '\n'
new_delimeter	Value: ', '
<i>Inherited from unittest.case.TestCase</i> longMessage, maxDiff	

21 Module *UnBlockMe.test.MapTests.moveTests*

21.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.test.MapTests'</code>

21.2 Class *TestMove*



21.2.1 Methods

<code>test_init(self)</code>

<code>test_isValid(self)</code>

<code>test_equals(self)</code>

<code>test_toStr(self)</code>

<code>test_left(self)</code>

<code>test_right(self)</code>

<code>test_up(self)</code>

<code>test_down(self)</code>

Inherited from unittest.case.TestCase

`--call--()`, `--eq--()`, `--hash--()`, `--init--()`, `--ne--()`, `--repr--()`, `--str--()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`,

assertLessEqual(), assertListEqual(), assertMultiLineEqual(), assertNotAlmostEqual(), assertNotAlmostEquals(), assertNotEqual(), assertNotEquals(), assertNotIn(), assertNotIsInstance(), assertNotRegexpMatches(), assertRaises(), assertRaisesRegexp(), assertRegexpMatches(), assertSequenceEqual(), assertSetEqual(), assertTrue(), assertTupleEqual(), assert_(), countTestCases(), debug(), defaultTestResult(), doCleanups(), fail(), failIf(), failIfAlmostEqual(), failIfEqual(), failUnless(), failUnlessAlmostEqual(), failUnlessEqual(), failUnlessRaises(), id(), run(), setUp(), setUpClass(), shortDescription(), skipTest(), tearDown(), tearDownClass()

Inherited from object

__delattr__(), __format__(), __getattr__(), __new__(), __reduce__(), __reduce_ex__(), __setattr__(), __sizeof__(), __subclasshook__()

21.2.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

21.2.3 Class Variables


Name	Description
<i>Inherited from unittest.case.TestCase</i>	
longMessage, maxDiff	

22 Module `UnBlockMe.test.MapTests.pieceTests`

22.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'UnBlockMe.test.MapTests'</code>

22.2 Class `TestPiece`

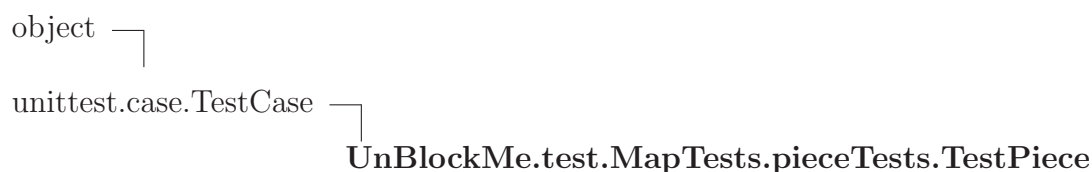

22.2.1 Methods

<code>test_init(self)</code>

<code>test_move(self)</code>

Inherited from `unittest.case.TestCase`

`__call__()`, `__eq__()`, `__hash__()`, `__init__()`, `__ne__()`, `__repr__()`, `__str__()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__setattr__()`, `__sizeof__()`, `__subclasshook__()`

22.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

22.2.3 Class Variables

Name	Description
<i>Inherited from unittest.case.TestCase</i> longMessage, maxDiff	

23 Module `UnBlockMe.test.MapTests.readerTests`

23.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.test.MapTests'</code>

23.2 Class `TestReader`



23.2.1 Methods

<code>test_is_loaded(self)</code>

<code>test_is_found(self)</code>

<code>test_get(self)</code>

Inherited from `unittest.case.TestCase`

`--call--()`, `--eq--()`, `--hash--()`, `--init--()`, `--ne--()`, `--repr--()`, `--str--()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from `object`

`--delattr--()`, `--format--()`, `--getattrattribute--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,

`__setattr__()`, `__sizeof__()`, `__subclasshook__()`

23.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

23.2.3 Class Variables

Name	Description
<i>Inherited from unittest.case.TestCase</i>	
<code>longMessage</code> , <code>maxDiff</code>	

24 Package UnBlockMe.test.PathFinding

24.1 Modules

- **AStarNodeTests** (*Section 25, p. 46*)
- **heuristicTests** (*Section 26, p. 48*)
- **nodeTests** (*Section 27, p. 50*)
- **pathFindingTests** (*Section 28, p. 52*)

24.2 Variables

Name	Description
<code>--package--</code>	Value: None

25 Module `UnBlockMe.test.PathFinding.AStarNodeTests`

25.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.test.PathFinding'</code>

25.2 Class `NodeTest`



25.2.1 Methods

<code>test_cost(self)</code>

Inherited from `unittest.case.TestCase`

`--call--()`, `--eq--()`, `--hash--()`, `--init--()`, `--ne--()`, `--repr--()`, `--str--()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from `object`

`--delattr--()`, `--format--()`, `--getattrattribute--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`, `--setattr--()`, `--sizeof--()`, `--subclasshook--()`

25.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

25.2.3 Class Variables

Name	Description
<i>Inherited from unittest.case.TestCase</i> longMessage, maxDiff	

26 Module `UnBlockMe.test.PathFinding.heuristicTests`

26.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'UnBlockMe.test.PathFinding'</code>

26.2 Class `TestMap`



26.2.1 Methods

<code>test_manhattan(self)</code>

<code>test_euclidian(self)</code>

Inherited from `unittest.case.TestCase`

`__call__()`, `__eq__()`, `__hash__()`, `__init__()`, `__ne__()`, `__repr__()`, `__str__()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__setattr__()`, `__sizeof__()`, `__subclasshook__()`

26.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

26.2.3 Class Variables

Name	Description
<i>Inherited from unittest.case.TestCase</i> longMessage, maxDiff	

27 Module `UnBlockMe.test.PathFinding.nodeTests`

27.1 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.test.PathFinding'</code>

27.2 Class `NodeTest`



27.2.1 Methods

<code>test_reconstructPath(self)</code>

Inherited from `unittest.case.TestCase`

`--call--()`, `--eq--()`, `--hash--()`, `--init--()`, `--ne--()`, `--repr--()`, `--str--()`, `addCleanup()`, `addTypeEqualityFunc()`, `assertAlmostEqual()`, `assertAlmostEquals()`, `assertDictContainsSubset()`, `assertDictEqual()`, `assertEqual()`, `assertEquals()`, `assertFalse()`, `assertGreater()`, `assertGreaterEqual()`, `assertIn()`, `assertIs()`, `assertIsInstance()`, `assertIsNone()`, `assertIsNot()`, `assertIsNotNone()`, `assertItemsEqual()`, `assertLess()`, `assertLessEqual()`, `assertListEqual()`, `assertMultiLineEqual()`, `assertNotAlmostEqual()`, `assertNotAlmostEquals()`, `assertNotEqual()`, `assertNotEquals()`, `assertNotIn()`, `assertNotIsInstance()`, `assertNotRegexpMatches()`, `assertRaises()`, `assertRaisesRegexp()`, `assertRegexpMatches()`, `assertSequenceEqual()`, `assertSetEqual()`, `assertTrue()`, `assertTupleEqual()`, `assert_()`, `countTestCases()`, `debug()`, `defaultTestResult()`, `doCleanups()`, `fail()`, `failIf()`, `failIfAlmostEqual()`, `failIfEqual()`, `failUnless()`, `failUnlessAlmostEqual()`, `failUnlessEqual()`, `failUnlessRaises()`, `id()`, `run()`, `setUp()`, `setUpClass()`, `shortDescription()`, `skipTest()`, `tearDown()`, `tearDownClass()`

Inherited from `object`

`--delattr--()`, `--format--()`, `--getattrattribute--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`, `--setattr--()`, `--sizeof--()`, `--subclasshook--()`

27.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

27.2.3 Class Variables

Name	Description
<i>Inherited from unittest.case.TestCase</i> longMessage, maxDiff	

28 Module `UnBlockMe.test.PathFinding.pathFindingTests`

28.1 Functions

```
testPaths(self, solver, isBFS=False, checkLength=True)
```

28.2 Variables

Name	Description
<code>--package--</code>	Value: <code>'UnBlockMe.test.PathFinding'</code>

28.3 Class `PathFindingTest`



28.3.1 Methods

```
solve(self, board, moves)
```

```
test_pathFinder(self)
```

```
test_dfs(self)
```

```
test_bfs(self)
```

heuristic (<i>self</i> , <i>board</i>)

Calculate heuristic cost for the given board.

Parameters

board: Board being analyzed <i>(type=Map)</i>

Return Value

Heuristic cost <i>(type=number)</i>
--

test_AStar (<i>self</i>)

Inherited from *unittest.case.TestCase*

__call__(), __eq__(), __hash__(), __init__(), __ne__(), __repr__(), __str__(), addCleanup(), addTypeEqualityFunc(), assertAlmostEqual(), assertAlmostEquals(), assertDictContainsSubset(), assertDictEqual(), assertEquals(), assertEquals(), assertFalse(), assertGreater(), assertGreaterEqual(), assertIn(), assertIs(), assertIsInstance(), assertIsNone(), assertIsNot(), assertIsNotNone(), assertItemsEqual(), assertLess(), assertLessEqual(), assertListEqual(), assertMultiLineEqual(), assertNotAlmostEqual(), assertNotAlmostEquals(), assertNotEqual(), assertNotEquals(), assertNotIn(), assertNotIsInstance(), assertNotRegexpMatches(), assertRaises(), assertRaisesRegexp(), assertRegexpMatches(), assertSequenceEqual(), assertSetEqual(), assertTrue(), assertTupleEqual(), assert_(), countTestCases(), debug(), defaultTestResult(), doCleanups(), fail(), failIf(), failIfAlmostEqual(), failIfEqual(), failUnless(), failUnlessAlmostEqual(), failUnlessEqual(), failUnlessRaises(), id(), run(), setUp(), setUpClass(), shortDescription(), skipTest(), tearDown(), tearDownClass()

Inherited from *object*

__delattr__(), __format__(), __getattr__(), __new__(), __reduce__(), __reduce_ex__(), __setattr__(), __sizeof__(), __subclasshook__()

28.3.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

28.3.3 Class Variables

continued on next page

Name	Description
Name	Description
<i>Inherited from unittest.case.TestCase</i>	
longMessage, maxDiff	

29 Module UnBlockMe.test.files

29.1 Variables

Name	Description
good	Value: 'test/Maps/good_map.map'
not_real	Value: 'test/Maps/doesnt_exist.map'
sample	Value: 'test/Maps/sample.string.map'
no_player	Value: 'test/Maps/no_player.map'
empty	Value: 'test/Maps/empty_map.map'
bad_col	Value: 'test/Maps/bad_map.map'
impossible	Value: 'test/Maps/impossible.map'
right	Value: 'test/Maps/right.map'
left	Value: 'test/Maps/left.map'
up	Value: 'test/Maps/up.map'
down	Value: 'test/Maps/down.map'
no_move	Value: 'test/Maps/no_move.map'
bad_mid_row	Value: 'test/Maps/bad_mid_row.map'
multiple_goals	Value: 'test/Maps/multiple_goals.map'
no_goals	Value: 'test/Maps/no_goals.map'
top_row_bad	Value: 'test/Maps/top_row_bad.map'
bottom_row_bad	Value: 'test/Maps/bottom_row_bad.map'
quick_solve	Value: 'test/Maps/solve.map'
simple_solve	Value: 'test/Maps/simple.map'
easy_solve	Value: 'test/Maps/easy.map'
left_goal	Value: 'test/Maps/left_goal.map'
__package__	Value: None

Index

- UnBlockMe (*package*), 2
 - UnBlockMe.Map (*package*), 3
 - UnBlockMe.Map.Map (*module*), 4–8
 - UnBlockMe.Map.MapReader (*module*), 9–10
 - UnBlockMe.Map.Move (*module*), 11–13
 - UnBlockMe.Map.Piece (*module*), 14–15
 - UnBlockMe.PathFinder (*package*), 16
 - UnBlockMe.PathFinder.AStar (*module*), 17–18
 - UnBlockMe.PathFinder.AStarNode (*module*), 19–20
 - UnBlockMe.PathFinder.Heuristics (*module*), 21
 - UnBlockMe.PathFinder.Node (*module*), 22–23
 - UnBlockMe.PathFinder.PathFinder (*module*), 24–25
 - UnBlockMe.PathFinder.Solver (*module*), 26
 - UnBlockMe.PathFinder.TreeSearch (*module*), 27–28
 - UnBlockMe.test (*package*), 33
 - UnBlockMe.test.files (*module*), 55
 - UnBlockMe.test.MapTests (*package*), 34
 - UnBlockMe.test.PathFinding (*package*), 45
 - UnBlockMe.Utility (*package*), 29
 - UnBlockMe.Utility.MovesTo (*module*), 30
 - UnBlockMe.Utility.Stack (*module*), 31–32