

# **OpenO&M Common Interoperability Registry (CIR) Specification v1.0 RC3**

This document defines the OpenO&M Common Interoperability Registry (CIR). The CIR specification is a standards-based, vendor-neutral approach for the construction of an object registration server. The specification defines an underlying logical data model, the web services for the registry, and a normative XML Schema/WSDL specification for the web services.

OpenO&M™ Common Interoperability Registry (CIR)

Copyright 2011. MIMOSA

All Rights Reserved. <http://www.mimosa.org>

Parts derived from WBF B2MML-V0401

"The Business To Manufacturing Markup Language (B2MML) is used courtesy of WBF."

Copyright © MIMOSA 2011. All Rights Reserved.

*All capitalized terms in the following text have the meanings assigned to them in the MIMOSA Intellectual Property Rights Policy (the "MIMOSA IPR Policy"). The full Policy may be found at the MIMOSA website.*

*This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to MIMOSA, except as needed for the purpose of developing any document or deliverable produced by a MIMOSA Technical Committee (in which case the rules applicable to copyrights, as set forth in the MIMOSA IPR Policy, must be followed) or as required to translate it into languages other than English.*

*The limited permissions granted above are perpetual and will not be revoked by MIMOSA or its successors or assigns.*

*This document and the information contained herein is provided on an "AS IS" basis and MIMOSA DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.*

*MIMOSA requests that any MIMOSA Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this MIMOSA Final Deliverable, to notify MIMOSA TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the MIMOSA Technical Committee that produced this deliverable.*

*MIMOSA invites any party to contact the MIMOSA TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this MIMOSA Final Deliverable by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the MIMOSA Technical Committee that produced this MIMOSA Final Deliverable. MIMOSA may include such claims on its website, but disclaims any obligation to do so.*

*MIMOSA takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this MIMOSA Final Deliverable or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on MIMOSA' procedures with respect to rights in any document or deliverable produced by a MIMOSA Technical Committee can be found on the MIMOSA website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this MIMOSA Final Deliverable, can be obtained from the MIMOSA TC Administrator. MIMOSA makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.*

## Table of Contents

1	Common Interoperability Registry .....	4
2	Logical Data Model .....	4
2.1	Primitive Data Types .....	4
2.1.1	XML Schema Types .....	4
2.1.2	Core Component Types .....	4
2.2	UML Model .....	5
2.3	Registry .....	5
2.4	Category .....	6
2.5	Entry .....	7
2.6	Property .....	8
2.7	PropertyValue .....	8
3	Service Definitions .....	9
3.1	CIR Command Services .....	9
3.1.1	Create Registry .....	9
3.1.2	Create Equivalent Entry .....	9
3.1.3	Update Registry .....	10
3.1.4	Update Entry CIRID .....	11
3.1.5	Delete Registry .....	11
3.1.6	Delete Category .....	11
3.1.7	Delete Entries .....	12
3.1.8	Delete Properties .....	12
3.2	CIR Query Services .....	13
3.2.1	Get Registry .....	13
3.2.2	Get Equivalent Entries .....	<b>Error! Bookmark not defined.</b>
3.2.3	Get Equivalent Entries By CIRID .....	13
3.2.4	Wildcard Specification .....	14
	Appendix A: OpenO&M Defined Properties .....	16
	ParentEntityID .....	16
	ChildEntityID .....	16
	PossibleEquivalentEntryID .....	16

# 1 Common Interoperability Registry

The Common Interoperability Registry (CIR) Specification provides a normative specification for the implementation of an object registry for operations and maintenance. It consists of:

- A functional specification (this document)
- WSDL service definitions (with associated XML Schema definitions)

The specification should be sufficiently detailed so that an implementation of the CIR server can be developed unambiguously.

## 2 Logical Data Model

This section presents the data model used within the CIR specification as part of its conceptual design. A CIR server implementation can use this data model (but is not restricted to<sup>1</sup>) as a physical data model for data persistence.

### 2.1 Primitive Data Types

#### 2.1.1 XML Schema Types

As the CIR Services use XML Schema for schema definitions in the WSDL services, all primitive types used in the CIR model are derived from XML Schema primitive types.

The namespace prefix “xs” is used to denote the XML Schema types in any UML diagrams.

#### 2.1.2 Core Component Types

The UN/CEFACT Core Component Types v2.0, which derive from XML Schema primitive types and define basic data element types for semantic interoperability, are used in place of most primitive types in the data model. For most attributes, the usage of the Core Component Types is not explicitly addressed by this CIR specification, and their inclusion is for future versions of the CIR specification. However, there are two locations within the data model that immediately necessitate their inclusion: (1) the use of the language/locale attribute on TextType for Registry/Category/Entry Description attributes, and (2) the code list metadata on CodeType for the Property UnitOfMeasure attribute.

The namespace prefix “cct” is used to denote the Core Component Types in any UML diagrams.

---

<sup>1</sup> Alternatively, a CIR implementation can use its own physical data model (with appropriate optimizations) for data persistence.

## 2.2 UML Model

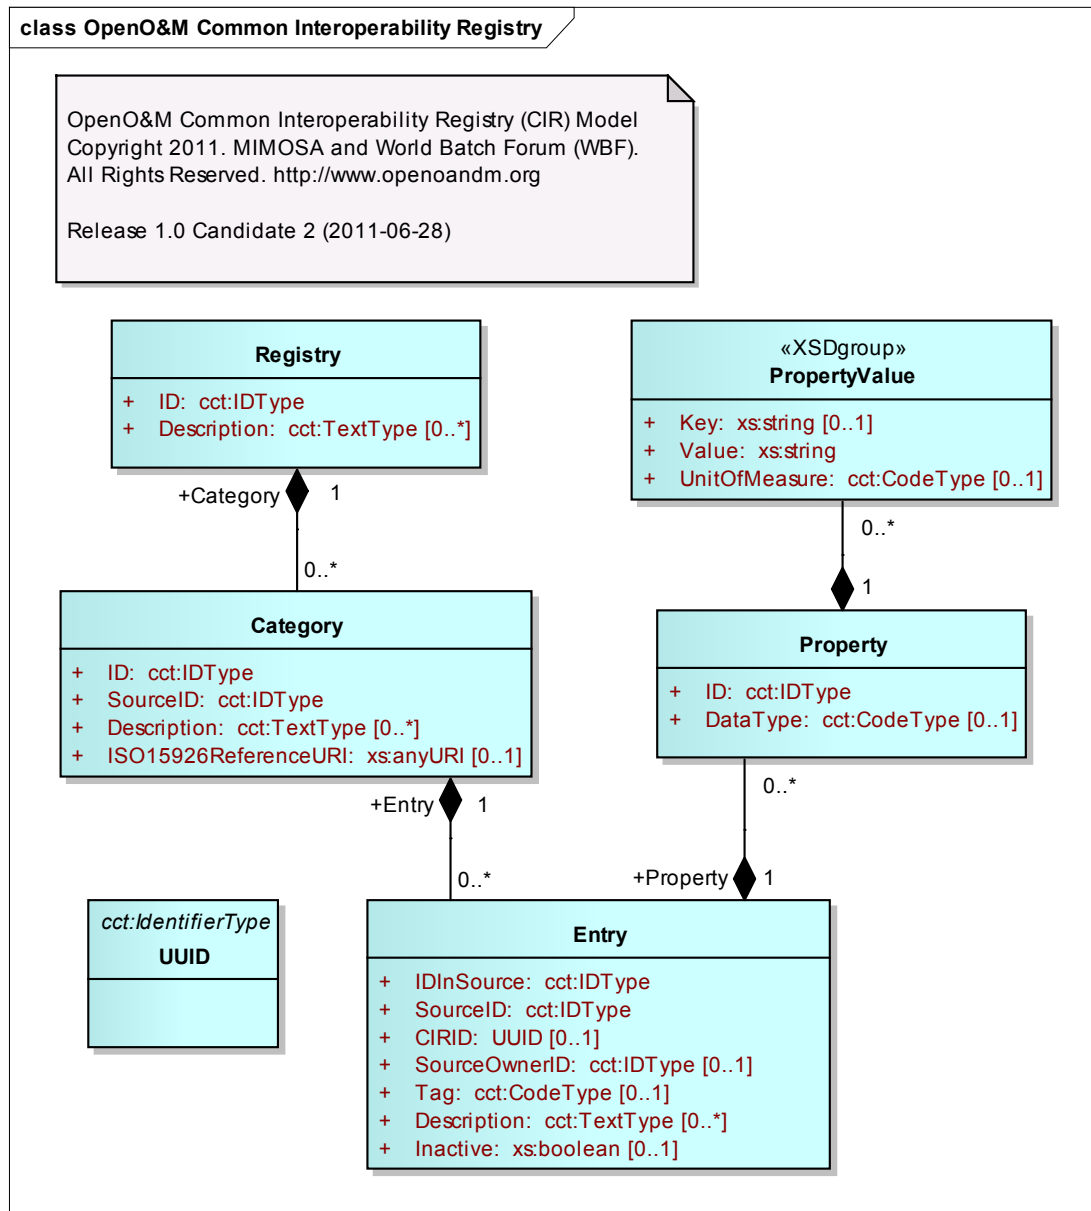


Figure 1 - Common Interoperability Registry data model

## 2.3 Registry

A Registry is the container object for a set of Categories. Examples of multiple registries include: test registry, active registry, local site registry, global corporate registry.

Attribute	Description	Cardinality
ID	User defined identifier of the registry. This must be unique within the CIR server. For example: <ul style="list-style-type: none"> <li>Registration Server A</li> <li>Test Registry</li> </ul>	1

	<ul style="list-style-type: none"> <li>Finance System Registry</li> </ul> A value based on ISO/IEC 9834-8 UUID may be used to ensure global uniqueness.	
Description	Description and expected use of the registry. Multiple values are allowed for multiple languages or alternate descriptions. The language/locale is specified through the UN/CEFACT TextType metadata attributes.	0..*

**Primary Key:** Registry ID

## 2.4 Category

A Category object is the container object for a set of Entries. Categories define sets of related or potentially related Entries. For example, a Category may be defined for equipment hierarchy level names (Enterprise, Site, Area, Work Center, Work Unit), which have alternate names on different systems. The combination of ID and SourceID must be unique within a Registry.

Attribute	Description	Cardinality
ID	User defined identifier of the category. For example: <ul style="list-style-type: none"> <li>Asset</li> <li>Asset_Type</li> <li>Segment</li> <li>Segment_Type</li> <li>Meas_Location</li> <li>Meas_Loc_Type</li> <li>Network</li> <li>Network_Type</li> <li>P&amp;ID Diagram Object</li> <li>Batch Status</li> <li>Production Status</li> <li>Equipment Status</li> </ul>	1
SourceID	Identification of the category. May define the organization and specification name for the category. For example: <ul style="list-style-type: none"> <li>MIMOSA OSA-EAI V3</li> <li>ISA 88 BatchStatus</li> <li>ISA 95-2000 EquipmentModel</li> <li>B2MML.EquipmentModel</li> <li>ISA88.RecipeModel1995</li> <li>BatchML.RecipeModelV4.04.01</li> <li>ChemCompany.RefineryModelV2.1</li> <li>ShippingCompany.TransportCode</li> </ul>	1
Description	Description and expected use of the category. Multiple values are allowed for multiple languages or alternate descriptions. The language/locale is specified through the UN/CEFACT TextType metadata attributes.	0..*
ISO15926 ReferenceURI	Defines the associated concept from the ISO 15926 Reference Data Library that is equivalent to the Category.	0..1

**Primary Key:** Registry ID, Category ID, Category SourceID

## 2.5 Entry

Entries define named element and properties with an identifier local to the owning application and a possible global ID (CIRID) that defined equivalent Entries in other applications. For example, the tag TC101 in System A may be the equivalent of tag UNIT101.TOP\_TEMP in System B. The combination of IDInSource and SourceID must be unique within a Category.

Attribute	Description	Cardinality
IDInSource	User defined identification of the entry in the source system. This may be the primary key within the source system or another unique value that can be used to distinguish objects within the source system.	1
SourceID	Identification of the source system. For example: <ul style="list-style-type: none"> <li>Engineering DB #234</li> <li>Supplier A MIMOSA CRIS Registry Database #1</li> <li>EAM/CMMS System B</li> </ul>	1
CIRID	System-assigned globally unique ID for the entry based on ISO/IEC 9834-8 UUID. Used to correlate multiple entries to identify logical equivalent entries (i.e. multiple entries with the same CIRID are equivalent objects).	0..1
SourceOwnerID	Organization that has responsibility for the source system or entity namespace. For example: <ul style="list-style-type: none"> <li>Oil Company A</li> <li>Chem Company B</li> <li>System Supplier A</li> <li>System Supplier B</li> </ul>	0..1
Tag	Shortcut identification of the entry. This is the source system's external identification of the entry. It is often what the user will see on a screen for this object in the source system. Usually locally unique for the user, but may not be the source system's internal primary key/unique identifier.	0..1
Description	Description of the entry. Multiple values are allowed for multiple languages or alternate descriptions. The language/locale is specified through the UN/CEFACT TextType metadata attributes.	0..*
Inactive	Boolean flag where FALSE or absent indicates the entry is active and available for use while TRUE indicates the entry is inactive. Examples of inactive entries may be data that is entered but the source system is not yet available or in use.	0..1

**Primary Key:** Registry ID, Category ID, Category SourceID, Entity IDInSource, Entity SourceID

Entries with the same CIRID are considered equivalent objects. For example, for the following set of Entries (not all columns are shown), the first three Entries are equivalent.

IDInSource	SourceID	CIRID	Tag
234443	System A	550e8400-e29b-41d4-a716-446655440000	Loop 106
423ABC	System B	550e8400-e29b-41d4-a716-446655440000	Cmn Loop 106
TIC-106	System C	550e8400-e29b-41d4-a716-446655440000	Top Temp Control
TIC-8106	System C	550e8400-e29b-41d4-a716-446655448778	Top Temp Control

## 2.6 Property

A Property defines an attribute or characteristic of an Entry. Properties may be used to help identify equivalent Entries. The Properties should be a small set of attributes that may be needed to link systems together, and are not intended to be a global property master registry.

Attribute	Description	Cardinality
ID	User defined identification of the property. This must be unique for a registry entry.	1
PropertyValue	Value of the property. See Section 2.7.	0..*
DataType	Data type of the value.	0..1

**Primary Key:** Registry ID, Category ID, Category SourceID, Entity IDInSource, Entity SourceID, Property ID

## 2.7 PropertyValue

A PropertyValue is a group of attributes that form the value of an Entry Property. The PropertyValue can be a key-value pair or a single value with or without a unit of measure.

Attribute	Description	Cardinality
Key	String-serialized key for the key-value pair of the property. Is not required if the value is not a key-value pair.	0..1
Value	String-serialized value of the property. Multiple values are allowed to provide for alternate values for identification.	1
UnitOfMeasure	Unit of measure of the value. The code list is specified through the UN/CEFACT CodeType list metadata attributes.	0..1



### 3 Service Definitions

This section defines the detailed format for the *CIR Service* definitions.

#### 3.1 CIR Command Services

The Command Services exposed by the CIR allow a client to create/update/delete registry data. All operations should be atomic, and there should be no partial creates/updates/deletions if a fault is thrown during the invocation of a service.

##### 3.1.1 Create Registry

<b>Name</b>	CreateRegistry
<b>Description</b>	Creates a new Registry, new Category in a Registry, new Entries in a Category, and Properties with Values in an Entry.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>Registry (<i>Registry</i>) [1..*] <ul style="list-style-type: none"> <li>The Registry/Category/Entry/Property structure to create within the CIR server.</li> </ul> </li> <li>CreateCIRID (<i>Boolean</i>) [1] <ul style="list-style-type: none"> <li>This flag indicates whether CIRIDs are created and allocated to the supplied Entries.</li> </ul> </li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>If the CIR server is configured to not allow new Registry objects and a new RegistryID is supplied, then the CIR server will throw a CreateRegistryFault.</li> <li>If the CIR server is configured to not allow new Category objects and a new CategoryID and SourceID are supplied, then the CIR server will throw a CreateCategoryFault.</li> <li>If there is a duplicate Entry (same primary key as an existing Entry), then the CIR server will throw a DuplicateEntryFault.</li> <li>If there is a duplicate Property (same primary key as an existing Property), then the CIR server will throw a DuplicatePropertyFault.</li> <li>If CreateCIRID is TRUE, then new UUIDs are generated for any Entries supplied without a CIRID. If CreateCIRID is FALSE, then the CIRID field is not supplemented with UUIDs.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>CreateRegistryFault</li> <li>CreateCategoryFault</li> <li>DuplicateEntryFault</li> <li>DuplicatePropertyFault</li> </ul>

##### 3.1.2 Create Equivalent Entry

<b>Name</b>	CreateEquivalentEntry
<b>Description</b>	Creates a single Entry and associated Properties, and links the new Entry to an existing equivalent Entry.
<b>Input</b>	<ul style="list-style-type: none"> <li>EquivalentEntry (<i>EquivalentEntry</i>) [1..*], where <i>EquivalentEntry</i> is</li> </ul>

<b>Parameters</b>	composed of: <ul style="list-style-type: none"> <li>○ ExistingIDInSource (<i>IDType</i>) [1]</li> <li>○ ExistingSourceID (<i>IDType</i>) [1]</li> <li>○ RegistryID (<i>IDType</i>) [1]</li> <li>○ CategoryID (<i>IDType</i>) [1]</li> <li>○ CategorySourceID (<i>IDType</i>) [1]</li> <li>○ Entry (<i>Entry</i>) [1]             <ul style="list-style-type: none"> <li>▪ The Entry/Property structure to create within the CIR server.</li> </ul> </li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>• If the Entry identified by the ExistingIDInSource and ExistingSourceID is not found, then the CIR server will throw an EntryNotFoundFault.</li> <li>• If the Registry identified by the RegistryID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> <li>• If the Category identified by the CategoryID and CategorySourceID is not found, then the CIR server will throw a CategoryNotFoundFault.</li> <li>• If there is a duplicate Entry (same primary key as an existing Entry), then the CIR server will throw a DuplicateEntryFault.</li> <li>• If only the existing Entry or both the existing Entry and supplied Entry have a CIRID, the existing Entry CIRID will be applied to both Entries. If the existing Entry does not have a CIRID but the supplied Entry does, the supplied Entry CIRID will be applied to both Entries. If neither Entry has a CIRID specified, then a new CIRID is created and applied to both Entries.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>• N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>• EntryNotFoundFault</li> <li>• RegistryNotFoundFault</li> <li>• CategoryNotFoundFault</li> <li>• DuplicateEntryFault</li> </ul>

### 3.1.3 Update Registry

<b>Name</b>	UpdateRegistry
<b>Description</b>	Updates the attributes of existing Registries, Categories, Entries or Properties.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>• Registry (<i>Registry</i>) [1..*]</li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>• All attributes of a Registry/Category/Entry/Property object apart from its primary key are updated based on the supplied objects.</li> <li>• If a Registry identified by the ID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> <li>• If a Category identified by the ID and SourceID is not found, then the CIR server will throw a CategoryNotFoundFault.</li> <li>• If an Entry identified by the IDInSource and SourceID is not found, then the CIR server will throw an EntryNotFoundFault.</li> <li>• If a Property identified by the ID is not found, then the CIR server will throw a PropertyNotFoundFault.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>• N/A</li> </ul>

<b>Faults</b>	<ul style="list-style-type: none"> <li>RegistryNotFoundFault</li> <li>CategoryNotFoundFault</li> <li>EntryNotFoundFault</li> <li>PropertyNotFoundFault</li> </ul>
---------------	---

### 3.1.4 Update Entry CIRID

<b>Name</b>	UpdateEntryCIRID
<b>Description</b>	Replaces the CIRID field on matching Entries with a new CIRID value.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>OldCIRID (<i>IDType</i>) [1..*]</li> <li>NewCIRID (<i>IDType</i>) [1]</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>

### 3.1.5 Delete Registry

<b>Name</b>	DeleteRegistry
<b>Description</b>	Deletes the specified Registry along with its Categories, Entries and Properties.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>RegistryID (<i>IDType</i>) [1]</li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>If the Registry identified by the RegistryID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>RegistryNotFoundFault</li> </ul>

### 3.1.6 Delete Category

<b>Name</b>	DeleteCategory
<b>Description</b>	Deletes the specified Category along with its Entries and Properties.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>RegistryID (<i>IDType</i>) [1]</li> <li>CategoryID (<i>IDType</i>) [1]</li> <li>CategorySourceID (<i>IDType</i>) [1]</li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>If the Registry identified by the RegistryID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> <li>If the Category identified by the CategoryID and CategorySourceID is not found, then the CIR server will throw a CategoryNotFoundFault.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>RegistryNotFoundFault</li> <li>CategoryNotFoundFault</li> </ul>

### 3.1.7 Delete Entries

<b>Name</b>	DeleteEntries
<b>Description</b>	Deletes the specified Entries along with its Properties.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>Entry (<i>EntryIdentifier</i>) [1..*], where <i>EntryIdentifier</i> is composed of: <ul style="list-style-type: none"> <li>Registry ID (<i>IDType</i>) [1]</li> <li>Category ID (<i>IDType</i>) [1]</li> <li>Category SourceID (<i>IDType</i>) [1]</li> <li>Entry IDInSource (<i>IDType</i>) [1]</li> <li>Entry SourceID (<i>IDType</i>) [1]</li> </ul> </li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>If a Registry identified by the ID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> <li>If a Category identified by the ID and SourceID is not found, then the CIR server will throw a CategoryNotFoundFault.</li> <li>If an Entry identified by the IDInSource and SourceID is not found, then the CIR server will throw an EntryNotFoundFault.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Faults</b>	<ul style="list-style-type: none"> <li>RegistryNotFoundFault</li> <li>CategoryNotFoundFault</li> <li>EntryNotFoundFault</li> </ul>

### 3.1.8 Delete Properties

<b>Name</b>	DeleteProperties
<b>Description</b>	Deletes the specified Properties.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>Property (<i>PropertyIdentifier</i>) [1..*], where <i>PropertyIdentifier</i> is composed of: <ul style="list-style-type: none"> <li>Registry ID (<i>IDType</i>) [1]</li> <li>Category ID (<i>IDType</i>) [1]</li> <li>Category SourceID (<i>IDType</i>) [1]</li> <li>Entry IDInSource (<i>IDType</i>) [1]</li> <li>Entry SourceID (<i>IDType</i>) [1]</li> <li>Property ID (<i>IDType</i>) [1]</li> </ul> </li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>If a Registry identified by the ID is not found, then the CIR server will throw a RegistryNotFoundFault.</li> <li>If a Category identified by the ID and SourceID is not found, then the CIR server will throw a CategoryNotFoundFault.</li> <li>If an Entry identified by the IDInSource and SourceID is not found, then the CIR server will throw an EntryNotFoundFault.</li> <li>If a Property identified by the ID is not found, then the CIR server will throw a PropertyNotFoundFault.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>

<b>Faults</b>	<ul style="list-style-type: none"> <li>• RegistryNotFoundFault</li> <li>• CategoryNotFoundFault</li> <li>• EntryNotFoundFault</li> <li>• PropertyNotFoundFault</li> </ul>
---------------	---

## 3.2 CIR Query Services

The Query Services exposed by the CIR allow a client to retrieve registry data. The client can use the Wildcard Specification defined in Section 3.2.2 in designated fields to identify multiple objects to be returned by a service.

### 3.2.1 Get Registry

<b>Name</b>	GetRegistry
<b>Description</b>	Returns all Registries, Categories, Entries and Properties filtered by the specified conditions.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>• Filter (<i>Filter</i>) [0..*], where <i>Filter</i> is composed of: <ul style="list-style-type: none"> <li>○ Registry Filter (<i>RegistryFilter</i>) [0..1]</li> <li>○ Category Filter (<i>CategoryFilter</i>) [0..1]</li> <li>○ Entry Filter (<i>EntryFilter</i>) [0..1]</li> <li>○ Property Filter (<i>PropertyFilter</i>) [0..1]</li> </ul> </li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>• Each filter type within a Filter (i.e. RegistryFilter, CategoryFilter, EntryFilter, PropertyFilter) acts as a logical AND filter. For example, if the Registry ID value is “Test”, Category ID is “Asset”, and Property ID “Length” then only Entries (and associated Registry, Category and Properties) of the “Asset” Category in the “Test” Registry that have a Property of “Length” are returned.</li> <li>• The absence of an input parameter type indicates that the data is not filtered by this facet (i.e. logical TRUE) and that all data elements are valid.</li> <li>• Multiple filters of the same filter type are supported and act as a logical OR filter. For example, if the EntryFilter 1 Tag is “P101” and the EntryFilter 2 Tag is “P102”, then the Entries with a Tag of “P101” or “P102” are returned.</li> <li>• Wildcards are supported on all fields within each filter type.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>• Registry (<i>Registry</i>) [0..*]</li> </ul>

### 3.2.2 Get Equivalent Entries

<b>Name</b>	GetEquivalentEntries
<b>Description</b>	Returns any equivalent Entries to the specified existing Entries (i.e. by identifying all Entries with the same CIRID to the existing Entries). Multiple entries are specified by IDInSource and SourceID pairs. A TargetSourceID or list of TargetSourceIDs can be specified to filter returned Entries.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>• EntrySourceIdentifier (<i>EntrySourceIdentifier</i>) [1..*] where <i>EntrySourceIdentifier</i> is composed of: <ul style="list-style-type: none"> <li>○ IDInSource (<i>IDType</i>) [1]</li> </ul> </li> </ul>

	<ul style="list-style-type: none"> <li>○ SourceID (<i>IDType</i>) [1]</li> <li>• TargetSourceID (<i>IDType</i>) [0..*]</li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>• If the existing Entry does not have a CIRID, nothing is returned.</li> <li>• Both the existing Entry and other Entries are returned to allow correlation (via CIRID) by the client.</li> <li>• The TargetSourceID filter only filters the other Entries and not the specified Entries.</li> <li>• If no TargetSourceID is specified, all Entries with the same CIRID are returned.</li> <li>• Multiple TargetSourceIDs are supported and act as a logical OR filter.</li> <li>• Wildcards are only supported on the TargetSourceID field.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>• Registry (<i>Registry</i>) [0..*]</li> </ul>

### 3.2.3 Get Equivalent Entries By CIRID

<b>Name</b>	GetEquivalentEntryByCIRID
<b>Description</b>	Returns any equivalent Entries to the specified existing Entry (i.e. by identifying all other Entries with the same CIRID to the existing Entry). An Entry is specified by CIRID. A Target SourceID or list of SourceIDs can be specified to filter returned Entries.
<b>Input Parameters</b>	<ul style="list-style-type: none"> <li>• Existing CIRID (<i>IDType</i>) [1]</li> <li>• Target SourceID Filter (<i>IDType</i>) [0..*]</li> </ul>
<b>Behavior</b>	<ul style="list-style-type: none"> <li>• If there is no existing Entry with the specified CIRID, nothing is returned.</li> <li>• Only <b>other</b> Entries are returned – the existing Entry is not returned as part of the result set.</li> <li>• If no Target SourceID is specified, all Entries with the same CIRID are returned.</li> <li>• Multiple Target SourceIDs are supported and act as a logical OR filter.</li> <li>• Wildcards are only supported on the Target SourceID field.</li> </ul>
<b>Returns</b>	<ul style="list-style-type: none"> <li>• Registry (<i>Registry</i>) [0..*]</li> </ul>

### 3.2.4 Wildcard Specification

Services utilizing RegistryFilter, CategoryFilter, EntryFilter or PropertyFilter can utilize wildcards when specifying filter parameters to identify multiple objects. The convention for specifying wildcards in text strings is through limited regular expressions. In a limited regular expression a wildcard value can have the following special characters:

“\*” – Indicates zero or more characters, any character is acceptable

Example 1: The wildcard “ABC\*” would match “ABC”, “ABCD”, “ABCDEF”, “ABC@4!\*”, but not “ABDDEF”

“%” – Indicates one or more characters, any character is acceptable

Example 2: The wildcard “ABC%” would match “ABCD”, “ABCDEF”, “ABC^4^\*”, but not “ABC”

“?” – Indicates zero or one characters at the specified position, any character is acceptable

Example 3: The wildcard “ABC?” would match “ABCX”, “ABCD”, “ABC!“, “ABC”, but not “ABCDE” or “ABDC”

The character following a “\” is considered a literal character, not a wildcard character.

Example 4: An object ID of “ABC\\*” defines the object ID as “ABC\*”.

Example 5: A property ID of “\\USM 123” defines the property ID “\USM 123”.

Two consecutive backslash characters, i.e. “\\” are interpreted to be a single backslash character “\”.

## Appendix A: OpenO&M Defined Properties

There are predefined OpenO&M properties that should be used to identify commonly understood relationships between entities.

### ***ParentEntityID***

The ParentEntityID contains the set of IDInSource IDs for parent object of the entity in the source's hierarchy. Multiple parent objects are specified by multiple PropertyValues.

### ***ChildEntityID***

The ChildEntityID contains the set of IDInSource IDs for child objects of the entity in the source's hierarchy. Multiple child objects are specified by multiple PropertyValues.

### ***PossibleEquivalentEntryID***

The PossibleEquivalentEntryID contains a set of target entities which are possibly equivalent to the entity. This allows for automated equivalency determination. Each returned target entry contains the following set of information:

1. IDInSource
2. SourceID
3. PercentLikelihood [Optional]

The property value should follow the JSON format for the array of objects or equivalent IDs.

Examples:

```
[ {"IDInSource": "TIC101", "SourceID": "Thor"} ]
```

```
[ {"IDInSource": "TIC101", "SourceID": "Thor", "PercentLikelihood": 20} ]
```

```
[ {"IDInSource": "TIC101", "SourceID": "Thor", "PercentLikelihood": 20},  
  {"IDInSource": "T101", "SourceID": "Apollo"} ]
```