


Description | Accepted | Editorial | Solutions | Submissions | All Submissions

Accepted 31 / 31 testcases passed
CLGBosiggy submitted at Oct 01, 2026 19:27
Analysis Solution

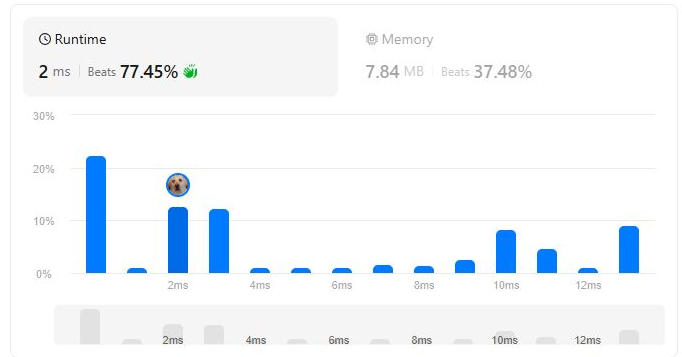

Code | C++

```
1 #include <iostream>
2 using namespace std;
3
4 class Solution {
5 public:
6     int fib(int n) {
7         if (n <= 1) return n;
8         int a = 0, b = 1;
```

View more

More challenges

Code

```
1 #include <iostream>
2 using namespace std;
3
4 class Solution {
5 public:
6     int fib(int n) {
7         if (n <= 1) return n;
8         int a = 0, b = 1;
9         for (int i = 2; i <= n; i++) {
10             int c = a + b;
11             a = b;
12             b = c;
13         }
14         return b;
15     }
16 };
17
```

Saved | Ln 7, Col 30

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

n = 23

Output

28657


Expected

28657

Contribute a testcase

Accepted 103 / 103 testcases passed
CLGBosiggy submitted at Oct 01, 2026 20:05

One More Day. One More Leet.
Your Back to School student deal just got a little longer.

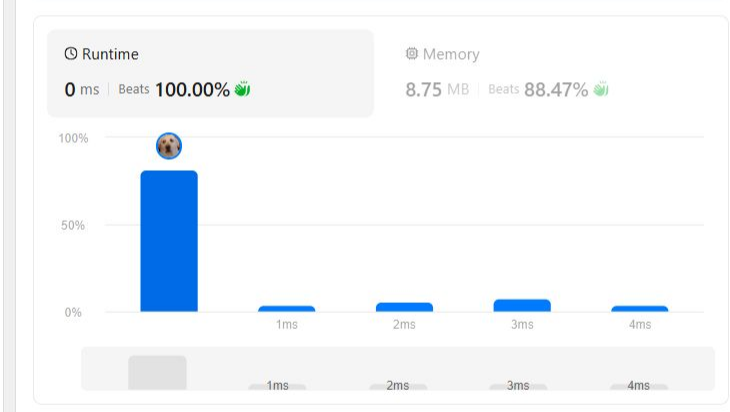

```
1 class Solution {
2 public:
3     bool isValid(string s) {
4         stack<char> st;
5         for (char c : s) {
6             if (c == '(' || c == '{' || c == '[') {
7                 st.push(c);
8             } else {
```

```
</> Code
C++ v Auto
1 class Solution {
2 public:
3     bool isValid(string s) {
4         stack<char> st;
5         for (char c : s) {
6             if (c == '(' || c == '{' || c == '[') {
7                 st.push(c);
8             } else {
9                 if (st.empty()) return false;
10                char top = st.top();
11                st.pop();
12                if ((c == ')' && top != '(') ||
13                    (c == '}' && top != '{') ||
14                    (c == ']' && top != '[')) {
15                    return false;
16                }
17            }
18        }
19        return true;
20    }
21 }
```

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3 Case 4 Case 5

Input

s =
"()"

Output

true

Expected

true

top()

在 C++ 的 **stack** 裡，**top()** 是用來 取出堆疊頂端元素 的函式。

用法範例

```
Cpp
#include <iostream>
#include <stack>
using namespace std;

int main() {
    stack<int> st;
    st.push(10);
    st.push(20);
    st.push(30);

    cout << st.top(); // 輸出 30
}
```

- push() : 把元素放進 stack。
- top() : 讀取最上面 (最後放進去) 的元素，但不刪除。
- pop() : 刪除最上面元素。