


LAB 5: USE of Trigger


A. Create database Lab5.

Query: CREATE DATABASE LAB5

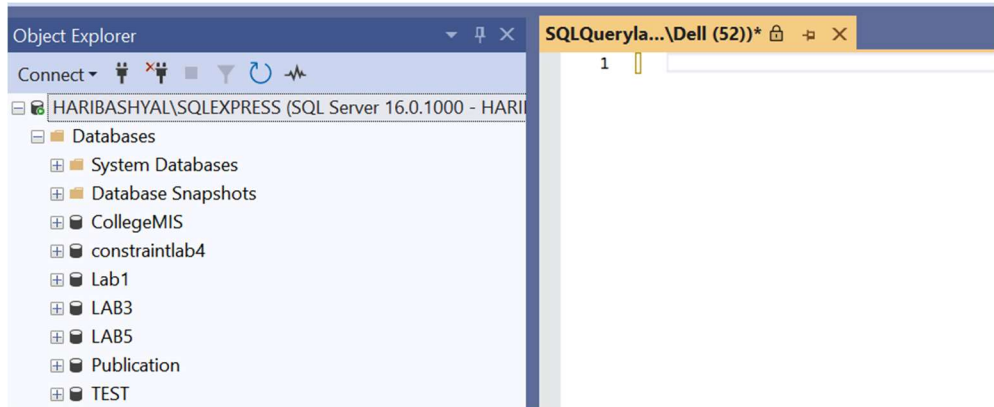

1. Create a table student (sid, sname, marks, address) and studentlog (logid, sid, actiontype, actiontime)


Query: CREATE TABLE student(
 sid int primary key,
 sname varchar(30),
 marks int,
 saddress varchar(40)
)
Select * from student

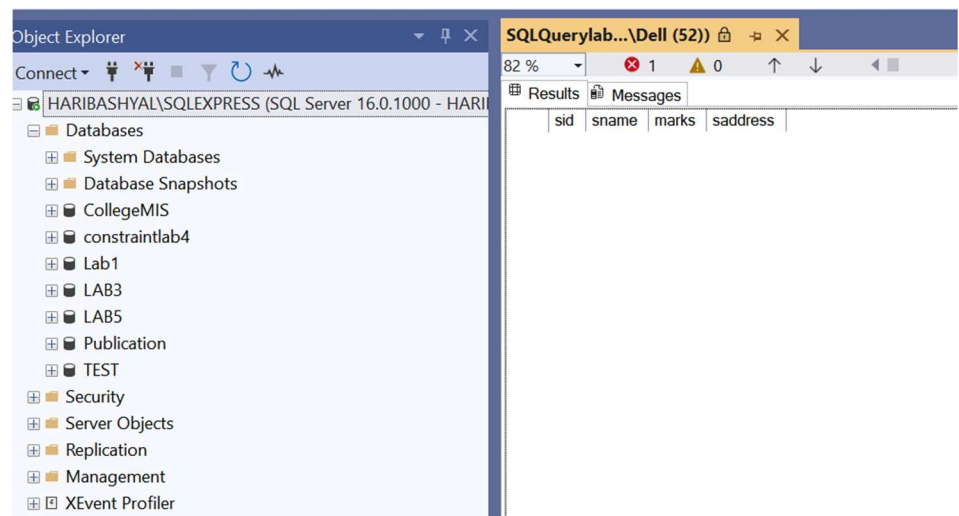

```

CREATE TABLE studentlog(
logid int identity(1,1),
sid int ,
actiontype varchar(30),
actiontime date
foreign key(sid) references student(sid)
)
select * from studentlog

```

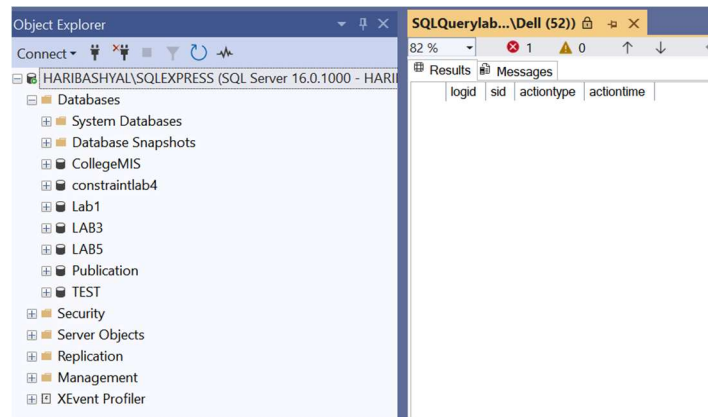


2. Create a trigger studentlog trigger in which log of student table inserted automatically when new data inserted to student table


```

Query:CREATE TRIGGER studentlog_trigger
ON student
AFTER INSERT
AS
BEGIN
INSERT INTO studentlog (sid, actiontype, actiontime)
SELECT sid, 'INSERT', GETDATE()
FROM inserted;
END;


```

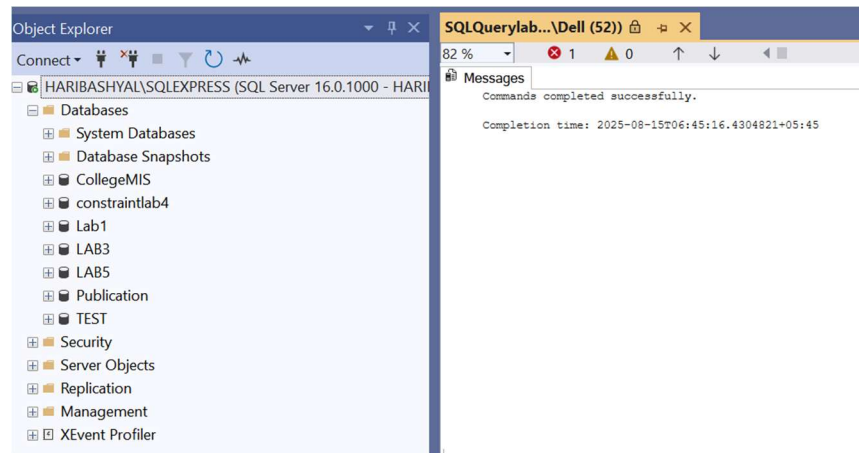

INSERT INTO student (sid, sname, marks, saddress)
VALUES (2, 'Roshan', 98, 'Kathmandu');
Select * from studentlog

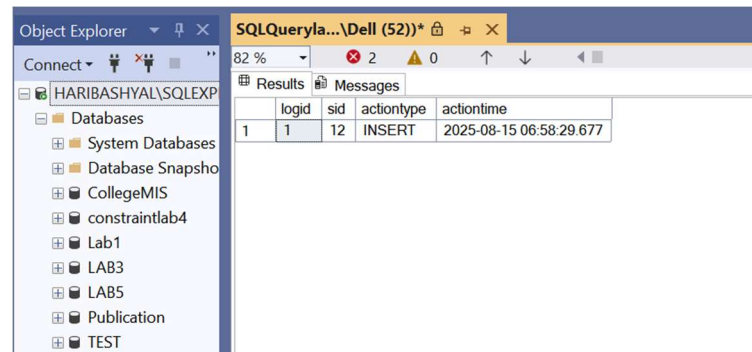

Select * from student

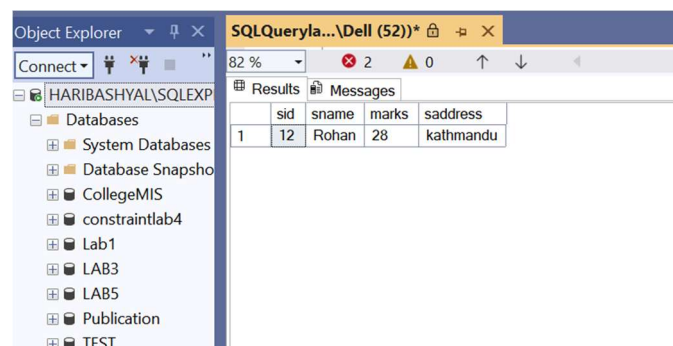

3. Create a trigger 'student_message' after inserting dates to student table.

Query: CREATE TRIGGER student_message
ON student


AFTER INSERT

AS

BEGIN

PRINT 'New student record has been inserted into the student table.';

END;

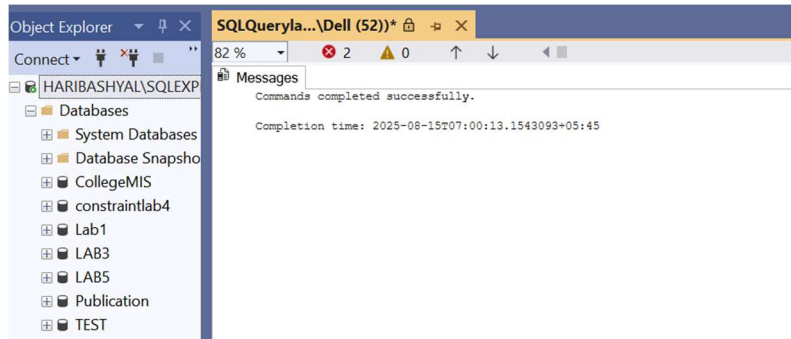

4. Create a trigger 'student_totalmarks' to find total marks and display it.

Query: CREATE TRIGGER student_totalmarks

ON student

AFTER INSERT

AS

BEGIN

DECLARE @total DECIMAL(10,2);

SELECT @total = SUM(marks)

FROM student;

PRINT 'Total marks of all students: ' + CAST(@total AS
VARCHAR(20));

END;

INSERT INTO student (sid, sname, marks, saddress)

VALUES (10, 'Ram', 91, 'Kathmandu');

Object Explorer

Connect

HARIBASHYAL\SQLEXP

Databases

System Databases

Database Snapsho

CollegeMIS

constraintlab4

Lab1

LAB3

LAB5

Publication

TEST

SQLQueryla...\Dell (52))*

82 %

2

0

↑

↓

◀

▶

Messages

Commands completed successfully.

Completion time: 2025-08-15T07:00:13.1543093+05:45