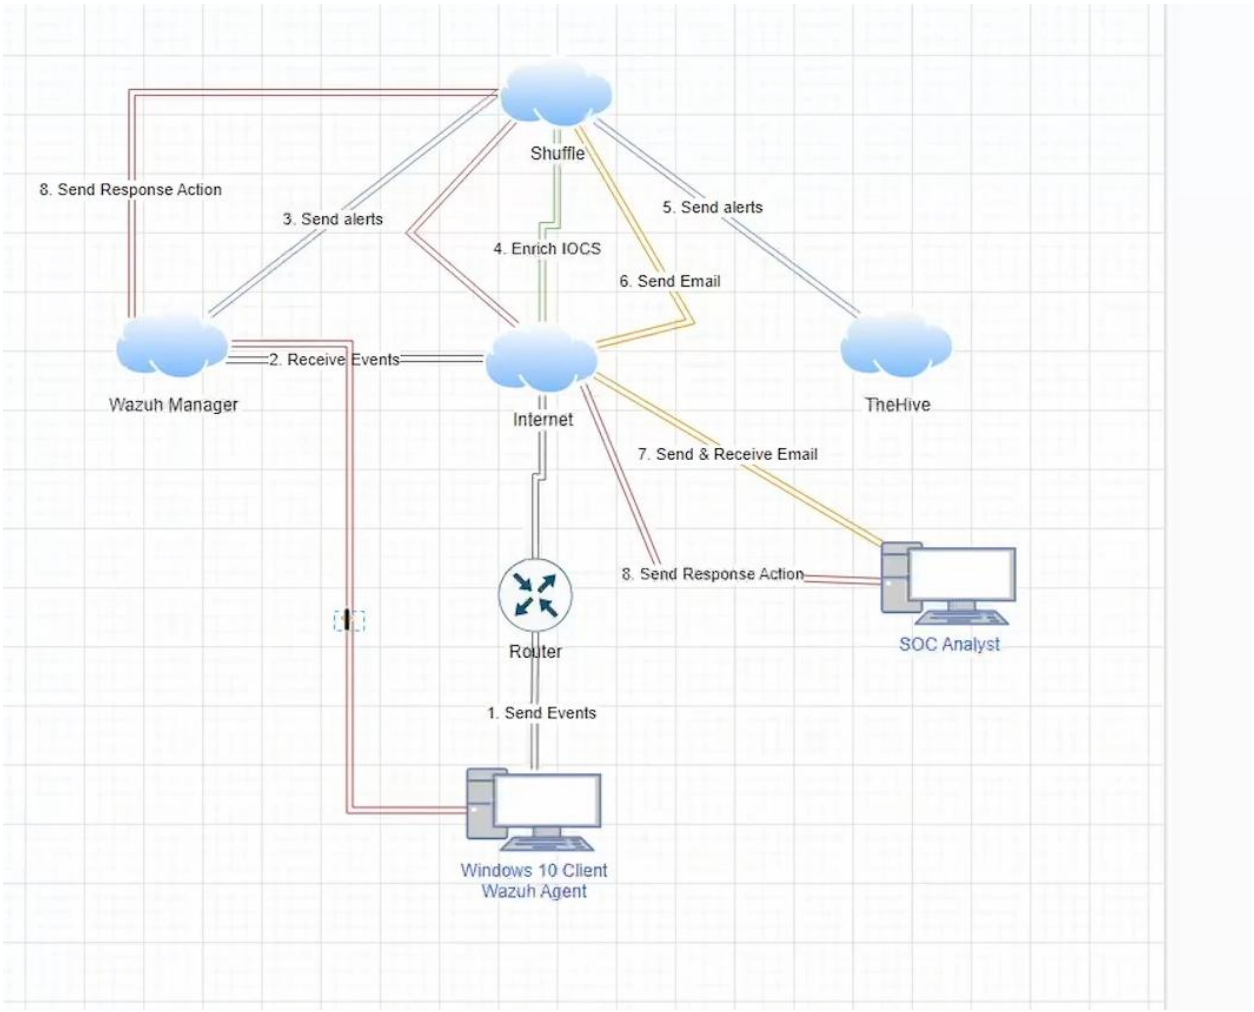
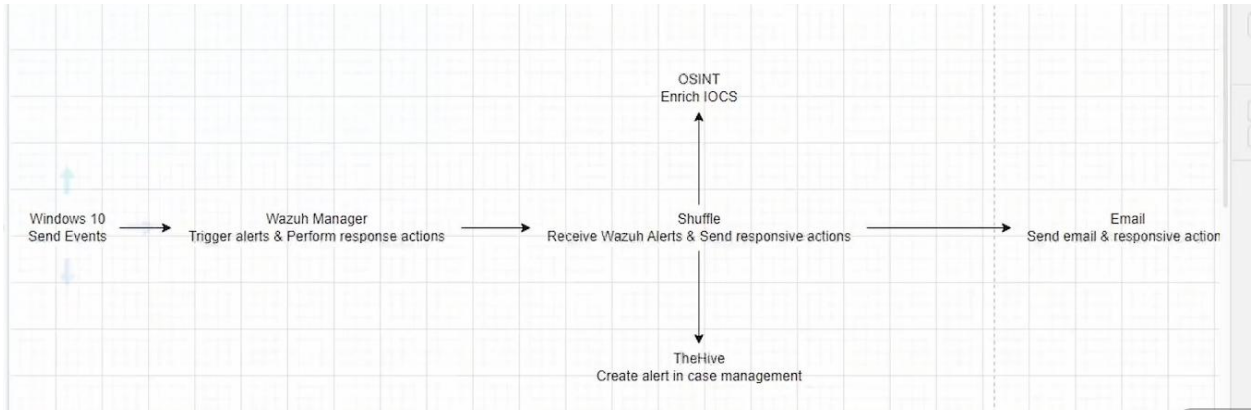
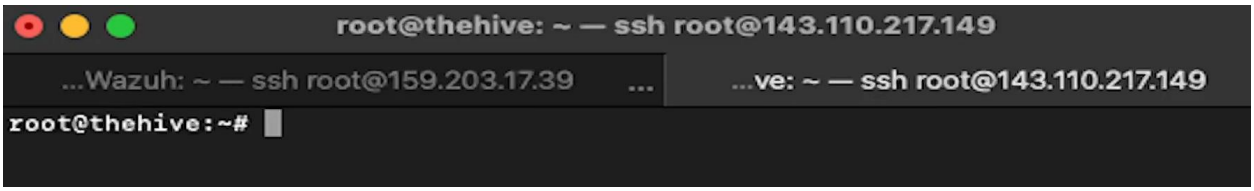
SOC AUTOMATION PROJECT

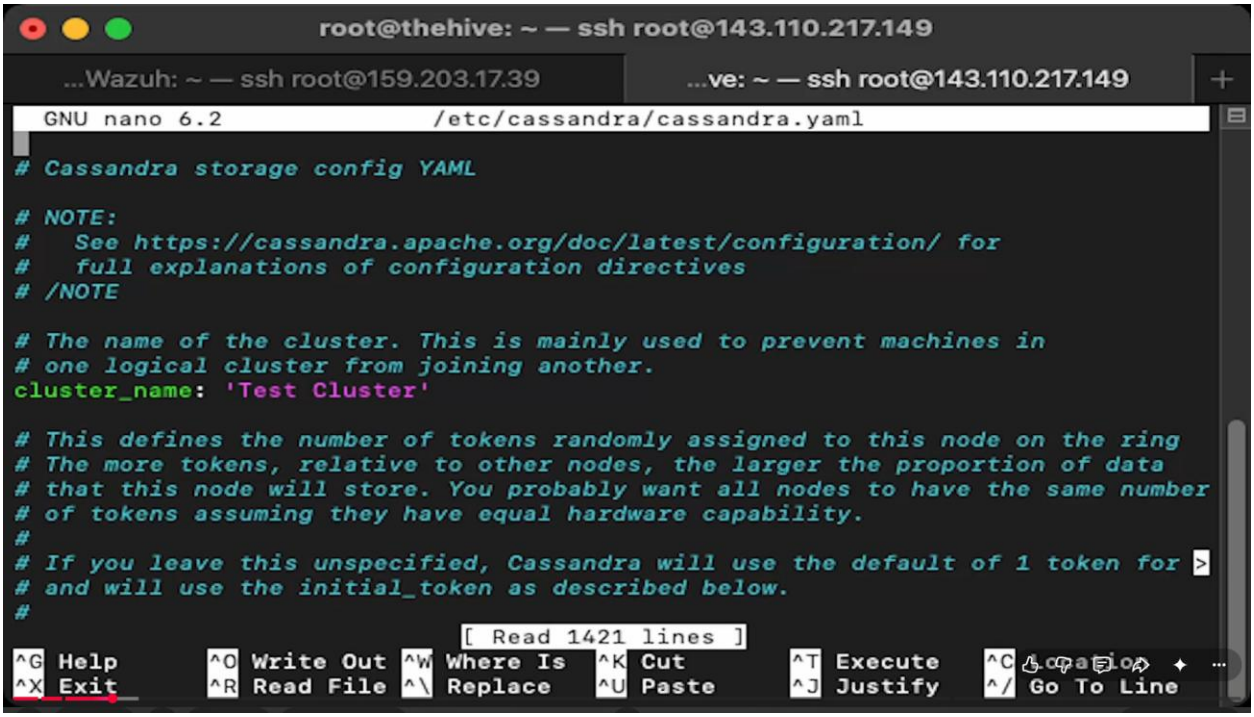
Part 1: design/diagram

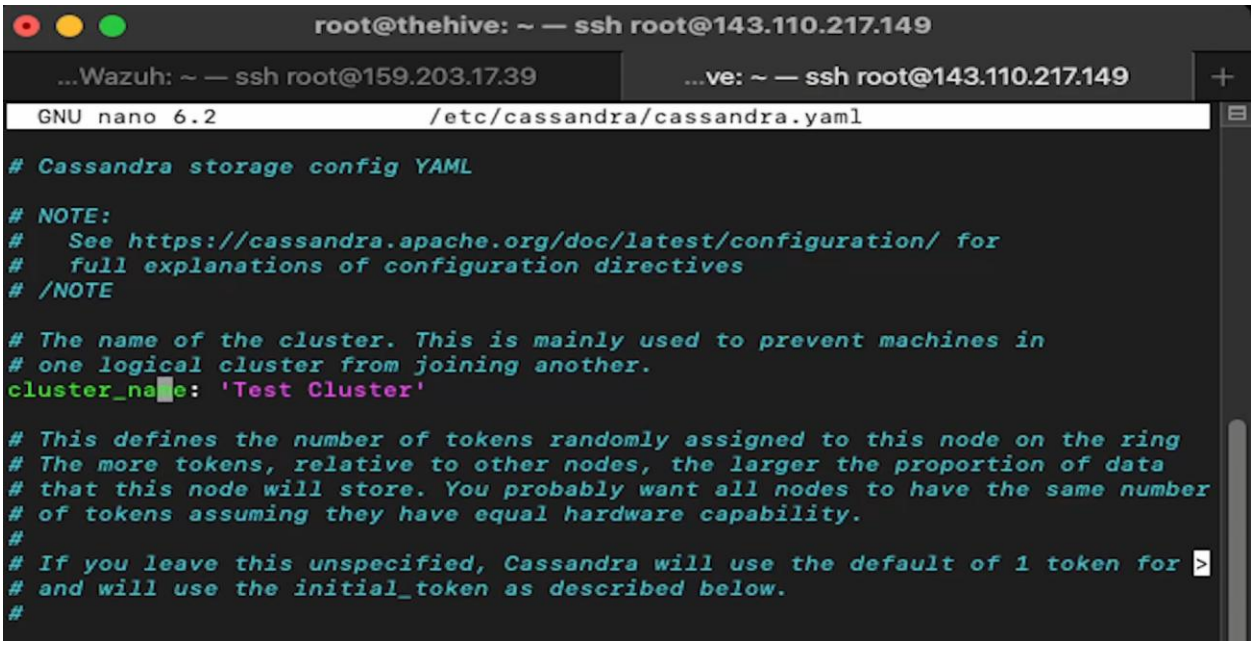




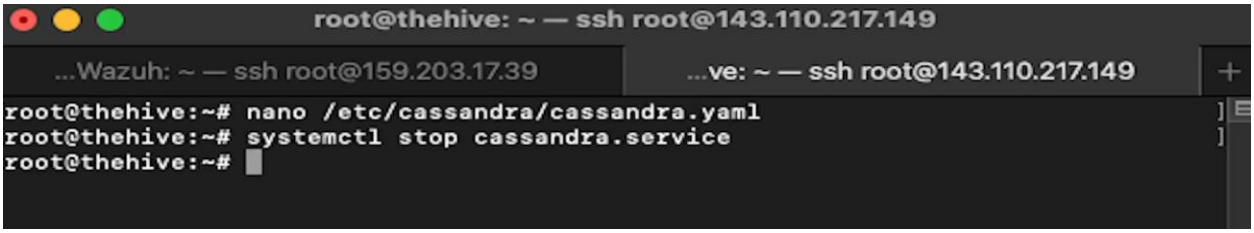
Part 2:

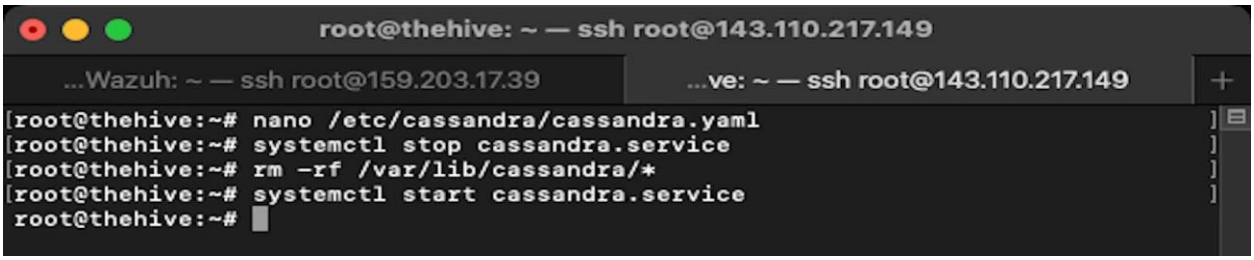

root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
root@thehive:~#


root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
GNU nano 6.2 /etc/cassandra/cassandra.yaml
Cassandra storage config YAML
NOTE:
See https://cassandra.apache.org/doc/latest/configuration/ for
full explanations of configuration directives
/NOTE
The name of the cluster. This is mainly used to prevent machines in
one logical cluster from joining another.
cluster_name: 'Test Cluster'
This defines the number of tokens randomly assigned to this node on the ring
The more tokens, relative to other nodes, the larger the proportion of data
that this node will store. You probably want all nodes to have the same number
of tokens assuming they have equal hardware capability.
#
If you leave this unspecified, Cassandra will use the default of 1 token for
and will use the initial_token as described below.
#
[Read 1421 lines]
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line

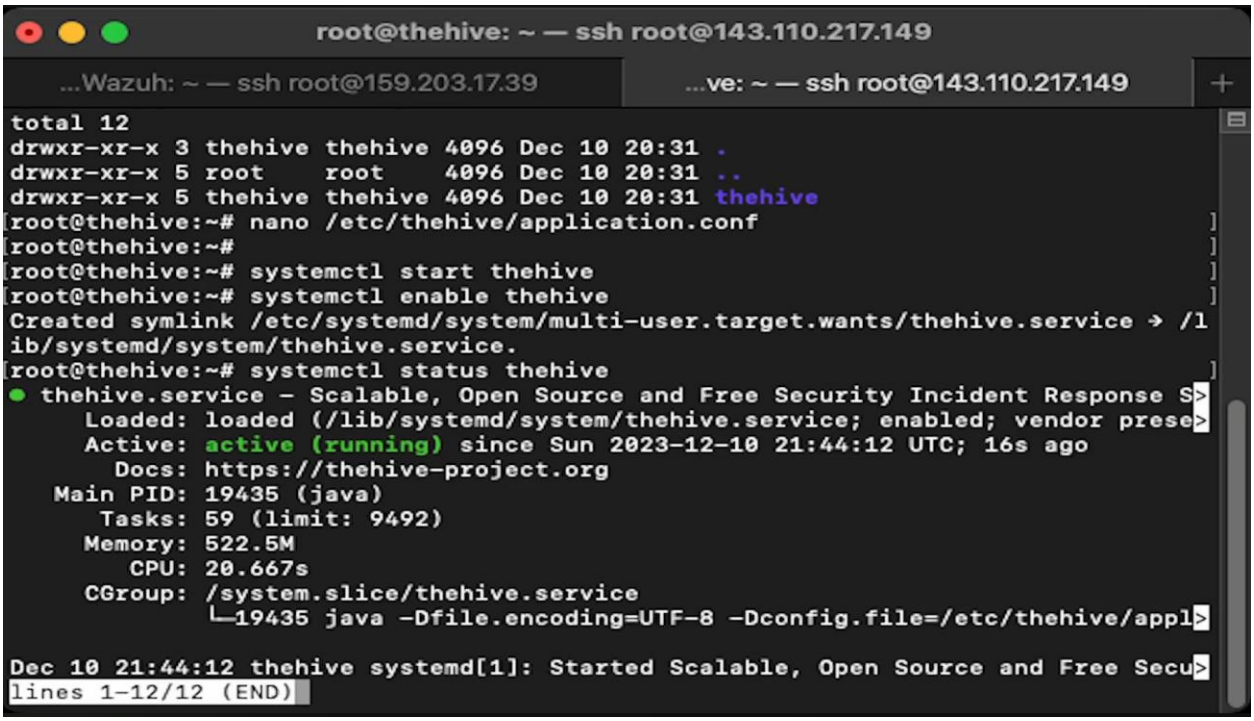

root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
GNU nano 6.2 /etc/cassandra/cassandra.yaml
Cassandra storage config YAML
NOTE:
See https://cassandra.apache.org/doc/latest/configuration/ for
full explanations of configuration directives
/NOTE
The name of the cluster. This is mainly used to prevent machines in
one logical cluster from joining another.
cluster_name: 'Test Cluster'
This defines the number of tokens randomly assigned to this node on the ring
The more tokens, relative to other nodes, the larger the proportion of data
that this node will store. You probably want all nodes to have the same number
of tokens assuming they have equal hardware capability.
#
If you leave this unspecified, Cassandra will use the default of 1 token for
and will use the initial_token as described below.
#

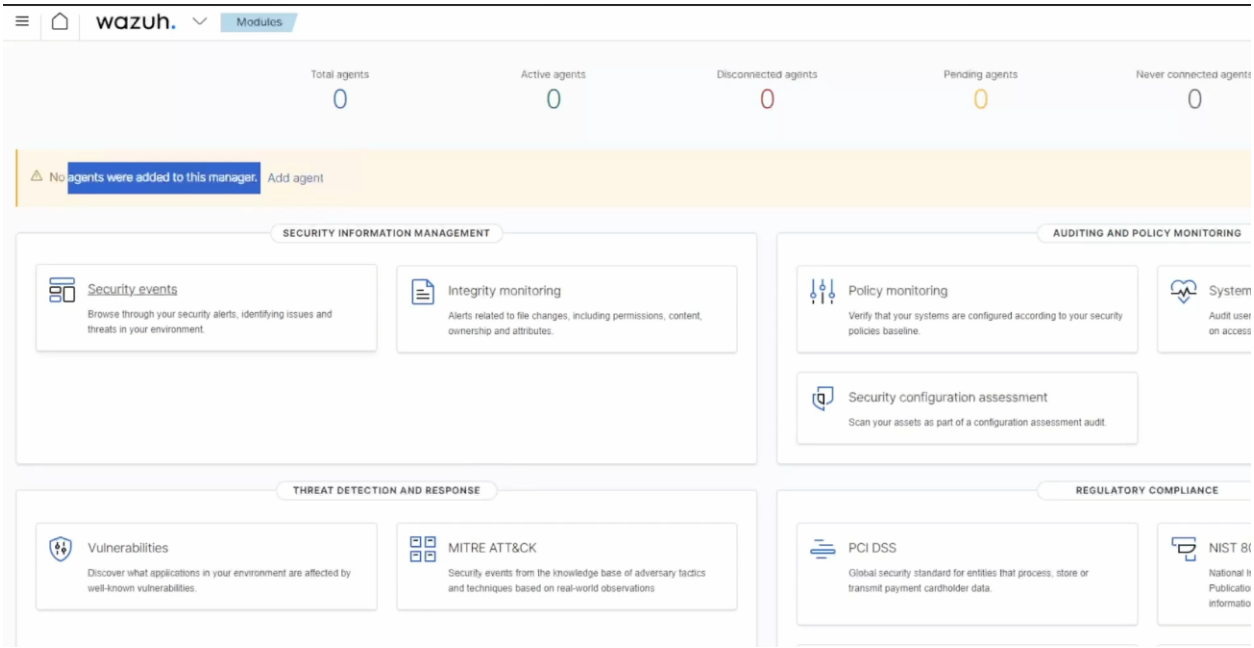

root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
GNU nano 6.2 /etc/cassandra/cassandra.yaml *
Address or interface to bind to and tell other Cassandra nodes to connect to.
You _must_ change this if you want multiple nodes to be able to communicate!
#
Set listen_address OR listen_interface, not both.
#
Leaving it blank leaves it up to InetAddress.getLocalHost(). This
will always do the Right Thing _if_ the node is properly configured
(hostname, name resolution, etc), and the Right Thing is to use the
address associated with the hostname (it might not be). If unresolvable
it will fall back to InetAddress.getLoopbackAddress(), which is wrong for pro
#
Setting listen_address to 0.0.0.0 is always wrong.
#
listen_address: 143.110.217.149
Set listen_address OR listen_interface, not both. Interfaces must correspond
to a single address, IP aliasing is not supported.
listen_interface: eth0
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line

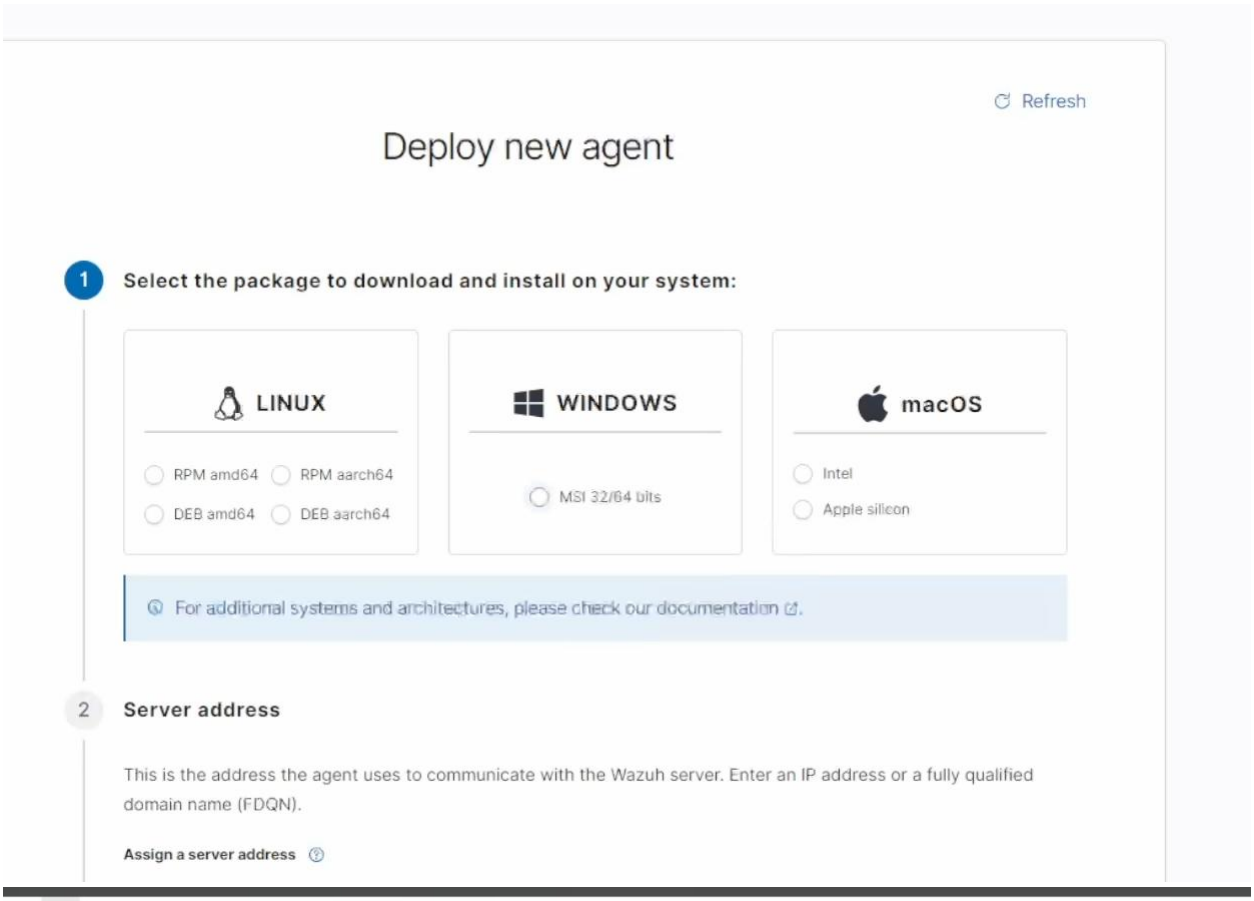

root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
root@thehive:~# nano /etc/cassandra/cassandra.yaml
root@thehive:~# systemctl stop cassandra.service
root@thehive:~#

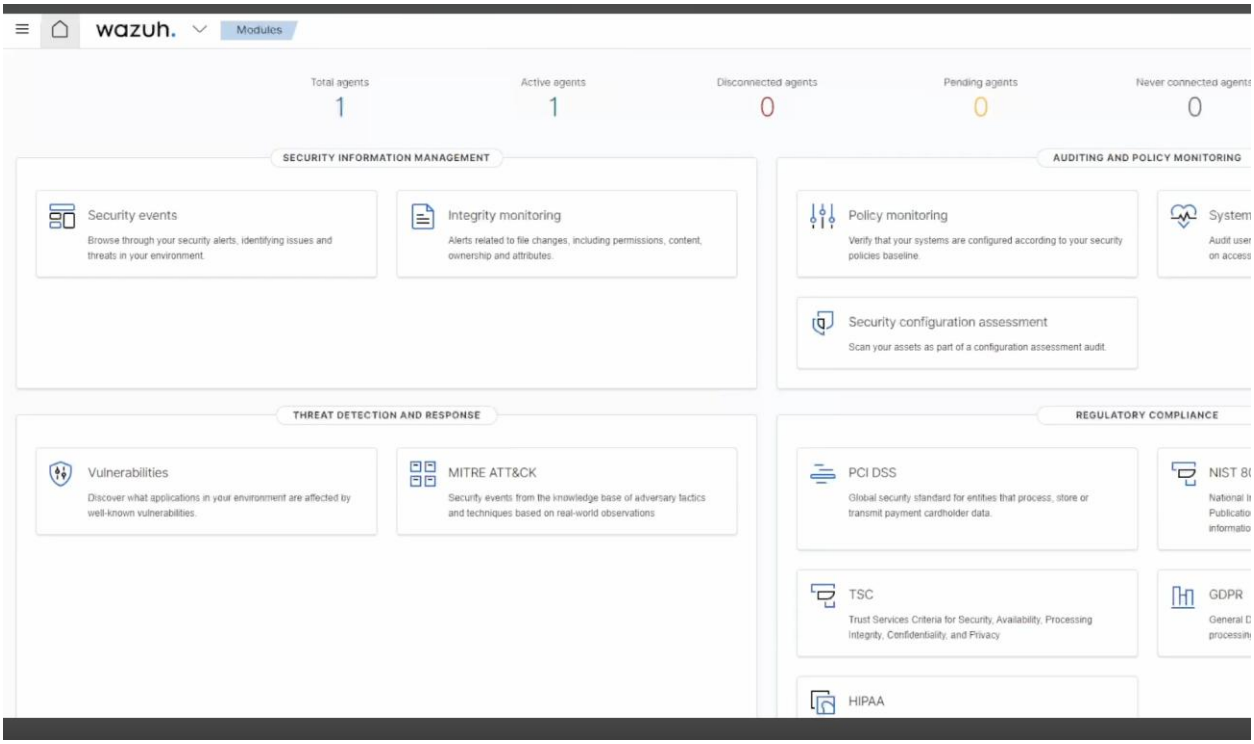

root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
root@thehive:~# nano /etc/cassandra/cassandra.yaml
root@thehive:~# systemctl stop cassandra.service
root@thehive:~# rm -rf /var/lib/cassandra/*
root@thehive:~# systemctl start cassandra.service
root@thehive:~#


...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
GNU nano 6.2 /etc/elasticsearch/elasticsearch.yml *
By default Elasticsearch listens for HTTP traffic on the first free port it
finds starting at 9200. Set a specific HTTP port here:
#
http.port: 9200
#
For more information, consult the network module documentation.
#
---------------------------------- Discovery -----------------------------------
#
Pass an initial list of hosts to perform discovery when this node is started:
The default list of hosts is ["127.0.0.1", "[::1]"]
#
#discovery.seed_hosts: ["host1", "host2"]
#
Bootstrap the cluster using an initial set of master-eligible nodes:
#
cluster.initial_master_nodes: ["node-1"
#
For more information, consult the discovery and cluster formation module docu>
#
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line
GNU nano 6.2 /etc/thehive/application.conf *
By default, TheHive is configured to connect to local Cassandra 4.x and a
local Elasticsearch services without authentication.
db.janusgraph {
storage {
backend = cql
hostname = ["143.110.217.149"]
Cassandra authentication (if configured)
username = "thehive"
password = "password"
cql {
cluster-name = mydfir
keyspace = thehive
}
}
index.search {
backend = elasticsearch
hostname = ["12"]
index-name = thehive
}
}
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location


root@thehive: ~ — ssh root@143.110.217.149
...Wazuh: ~ — ssh root@159.203.17.39
...ve: ~ — ssh root@143.110.217.149
total 12
drwxr-xr-x 3 thehive thehive 4096 Dec 10 20:31 .
drwxr-xr-x 5 root root 4096 Dec 10 20:31 ..
drwxr-xr-x 5 thehive thehive 4096 Dec 10 20:31 thehive
[root@thehive:~# nano /etc/thehive/application.conf
[root@thehive:~#
[root@thehive:~# systemctl start thehive
[root@thehive:~# systemctl enable thehive
Created symlink /etc/systemd/system/multi-user.target.wants/thehive.service → /lib/systemd/system/thehive.service.
[root@thehive:~# systemctl status thehive
● thehive.service - Scalable, Open Source and Free Security Incident Response S
Loaded: loaded (/lib/systemd/system/thehive.service; enabled; vendor prese
Active: active (running) since Sun 2023-12-10 21:44:12 UTC; 16s ago
Docs: https://thehive-project.org
Main PID: 19435 (java)
Tasks: 59 (limit: 9492)
Memory: 522.5M
CPU: 20.667s
CGroup: /system.slice/thehive.service
└─19435 java -Dfile.encoding=UTF-8 -Dconfig.file=/etc/thehive/appl
Dec 10 21:44:12 thehive systemd[1]: Started Scalable, Open Source and Free Secu
lines 1-12/12 (END)


wazuh.
Modules
Total agents
0
Active agents
0
Disconnected agents
0
Pending agents
0
Never connected agents
0
No agents were added to this manager.
Add agent
SECURITY INFORMATION MANAGEMENT
Security events
Browse through your security alerts, identifying issues and threats in your environment.
Integrity monitoring
Alerts related to file changes, including permissions, content, ownership and attributes.
AUDITING AND POLICY MONITORING
Policy monitoring
Verify that your systems are configured according to your security policies baseline.
Security configuration assessment
Scan your assets as part of a configuration assessment audit.
THREAT DETECTION AND RESPONSE
Vulnerabilities
Discover what applications in your environment are affected by well-known vulnerabilities.
MITRE ATT&CK
Security events from the knowledge base of adversary tactics and techniques based on real-world observations
REGULATORY COMPLIANCE
PCI DSS
Global security standard for entities that process, store or transmit payment cardholder data.


Refresh
Deploy new agent
1
Select the package to download and install on your system:
LINUX
RPM amd64
RPM aarch64
DEB amd64
DEB aarch64
WINDOWS
MSI 32/64 bits
macOS
Intel
Apple silicon
For additional systems and architectures, please check our documentation.
2
Server address
This is the address the agent uses to communicate with the Wazuh server. Enter an IP address or a fully qualified domain name (FDQN).
Assign a server address


wazuh.
Modules
Total agents
1
Active agents
1
Disconnected agents
0
Pending agents
0
Never connected agents
0
SECURITY INFORMATION MANAGEMENT
Security events
Browse through your security alerts, identifying issues and threats in your environment.
Integrity monitoring
Alerts related to file changes, including permissions, content, ownership and attributes.
AUDITING AND POLICY MONITORING
Policy monitoring
Verify that your systems are configured according to your security policies baseline.
Security configuration assessment
Scan your assets as part of a configuration assessment audit.
THREAT DETECTION AND RESPONSE
Vulnerabilities
Discover what applications in your environment are affected by well-known vulnerabilities.
MITRE ATT&CK
Security events from the knowledge base of adversary tactics and techniques based on real-world observations
REGULATORY COMPLIANCE
PCI DSS
Global security standard for entities that process, store or transmit payment cardholder data.
TSC
Trust Services Criteria for Security, Availability, Processing Integrity, Confidentiality, and Privacy
GDPR
HIPAA

```
  <queue_size>5000</queue_size>
  <events_per_second>500</events_per_second>
</client_buffer>

<!-- Log analysis -->
<localfile>
  <location>Application</location>
  <log_format>eventchannel</log_format>
</localfile>

<localfile>
  <location>Security</location>
  <log_format>eventchannel</log_format>
  <query>Event/System[EventID != 5145 and EventID != 5156 and EventID != 5447 and
    EventID != 4656 and EventID != 4658 and EventID != 4663 and EventID != 4660 and
    EventID != 4670 and EventID != 4690 and EventID != 4703 and EventID != 4907 and
    EventID != 5152 and EventID != 5157]</query>
</localfile>

<localfile>
  <location>System</location>
  <log_format>eventchannel</log_format>
```

ossec - Notepad

Edit Format View Help

```
/client>


!-- Agent buffer options -->
:lient_buffer>
 <disabled>no</disabled>
 <queue_size>5000</queue_size>
 <events_per_second>500</events_per_second>
/client_buffer>

!-- Log analysis -->
localfile>
 <location>Application</location>
 <log_format>eventchannel</log_format>
/localfile>

localfile>
 <location>Security</location>
 <log_format>eventchannel</log_format>
 <query>Event/System[EventID != 5145 and EventID != 5156 and EventID != 5447 and
   EventID != 4656 and EventID != 4658 and EventID != 4663 and EventID != 4660 and
   EventID != 4670 and EventID != 4690 and EventID != 4703 and EventID != 4907 and
   EventID != 5152 and EventID != 5157]</query>
/localfile>

localfile>
 <location>System</location>
 <log_format>eventchannel</log_format>
/localfile>

localfile>
 <location>active-response\active-responses.log</location>
 <log_format>syslog</log_format>
/localfile>
```

*ossec - Notepad

File Edit Format View Help

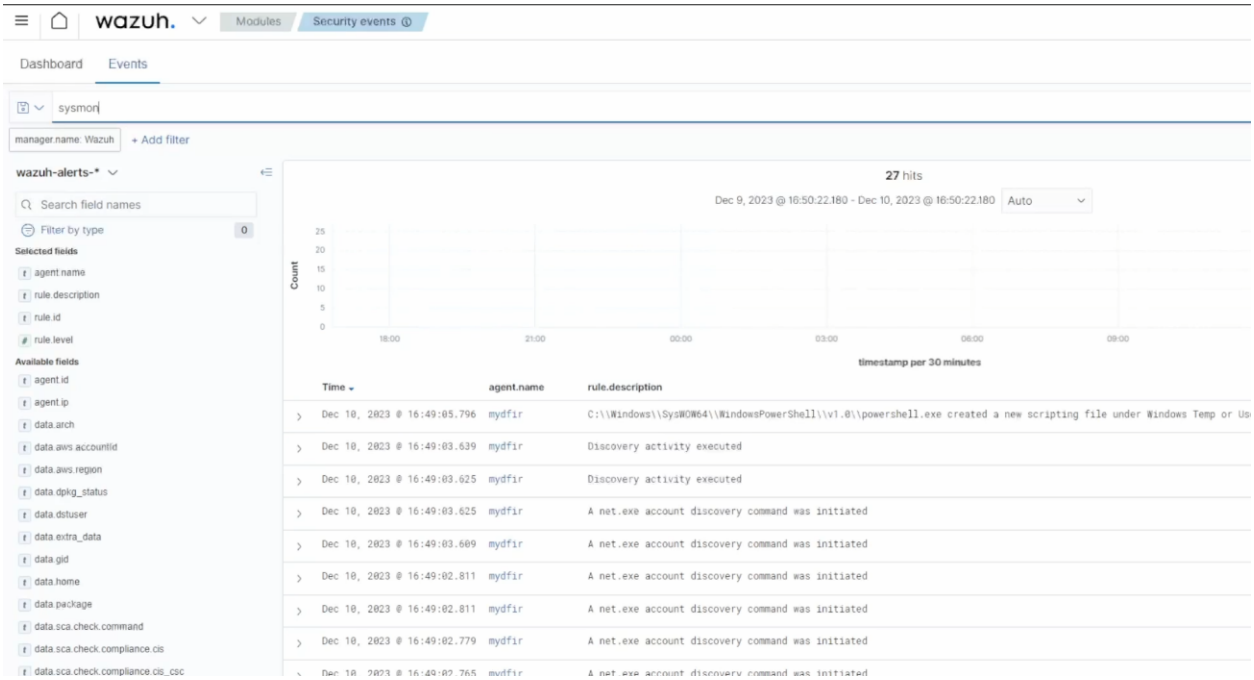
```
  </client>


  <!-- Agent buffer options -->
  <client_buffer>
    <disabled>no</disabled>
    <queue_size>5000</queue_size>
    <events_per_second>500</events_per_second>
  </client_buffer>

  <!-- Log analysis -->
  <localfile>
    <location>Application</location>
    <log_format>eventchannel</log_format>
  </localfile>

  <localfile>
    <location>Security</location>
    <log_format>eventchannel</log_format>
    <query>Event/System[EventID != 5145 and EventID != 5156 and EventID != 5447 and
      EventID != 4656 and EventID != 4658 and EventID != 4663 and EventID != 4660 and
      EventID != 4670 and EventID != 4690 and EventID != 4703 and EventID != 4907 and
      EventID != 5152 and EventID != 5157]</query>
  </localfile>

<localfile>
    <location>Security</location>
    <log_format>eventchannel</log_format>
    <query>Event/System[EventID != 5145 and EventID != 5156 and EventID != 5447 and
      EventID != 4656 and EventID != 4658 and EventID != 4663 and EventID != 4660 and
      EventID != 4670 and EventID != 4690 and EventID != 4703 and EventID != 4907 and
      EventID != 5152 and EventID != 5157]</query>
  </localfile>
```



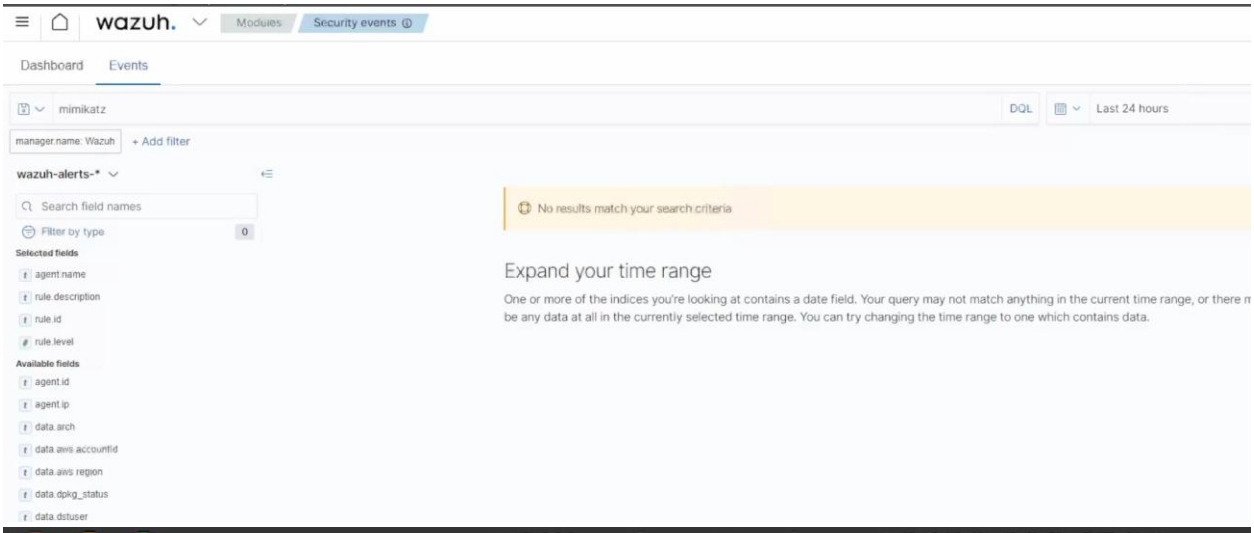
```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Try the new cross-platform PowerShell https://aka.ms/pscore6

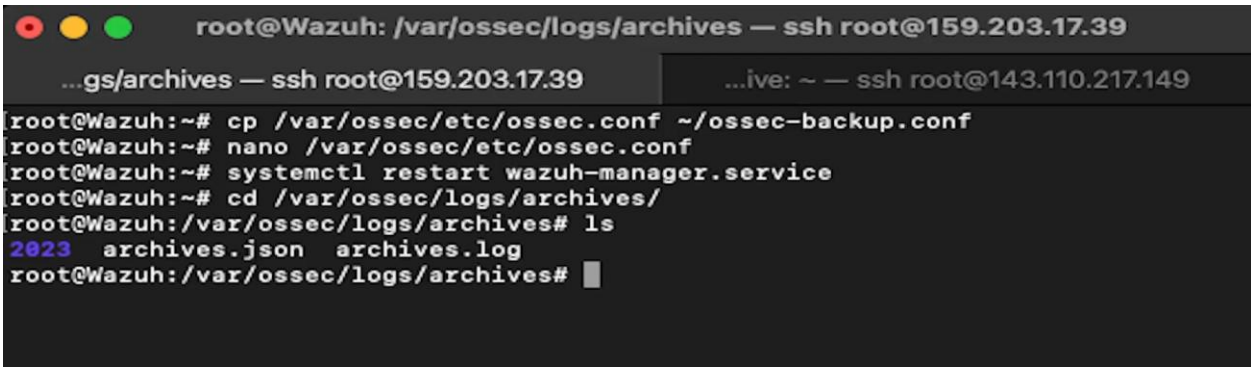
PS C:\Windows\system32> cd C:\Users\sally\Downloads\mimikatz_trunk\x64
PS C:\Users\sally\Downloads\mimikatz_trunk\x64> .\mimikatz.exe

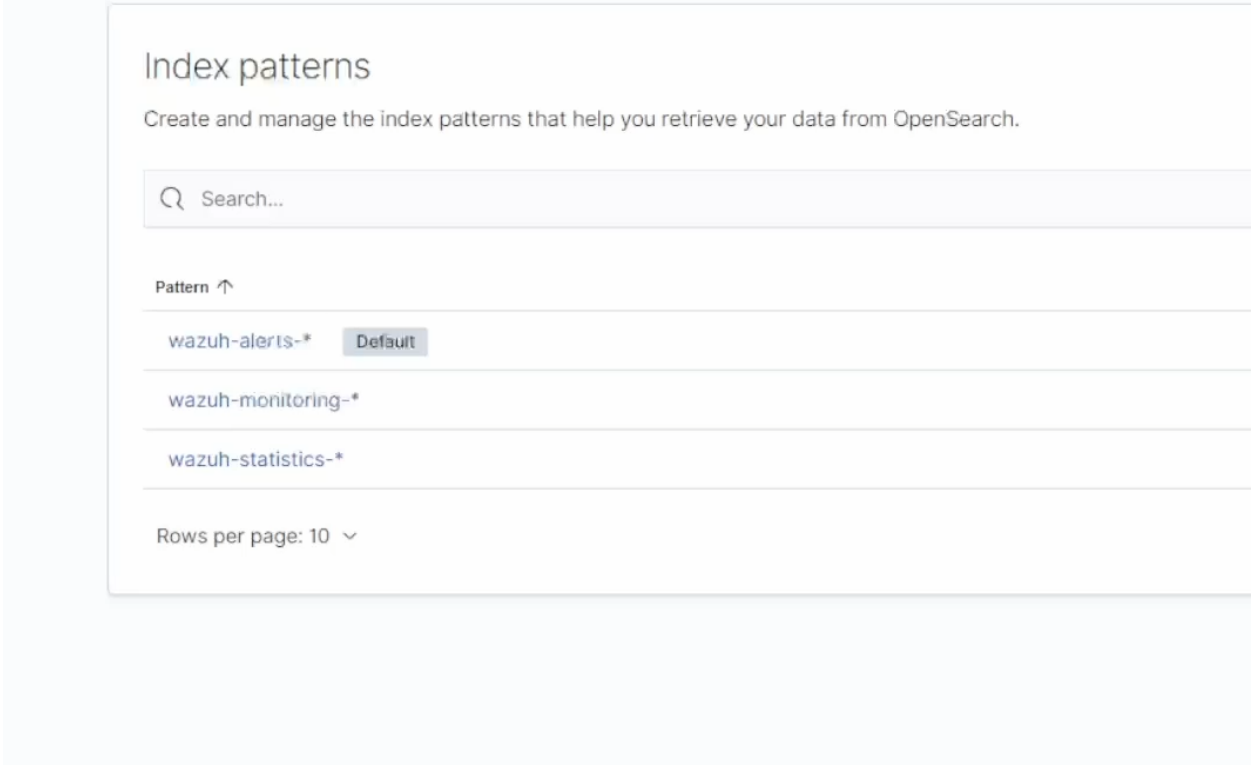
  .#####.   mimikatz 2.2.0 (x64) #19041 Sep 19 2022 17:44:08
 .## ^ ##.  "A La Vie, A L'Amour" - (oe.eo)
 ## / \ ##  /*** Benjamin DELPY `gentilkiwi` ( benjamin@gentilkiwi.com )
 ## \ / ##       > https://blog.gentilkiwi.com/mimikatz
 '## v ##'       Vincent LE TOUX             ( vincent.letoux@gmail.com )
  '#####'        > https://pingcastle.com / https://mysmartlogon.com ***/

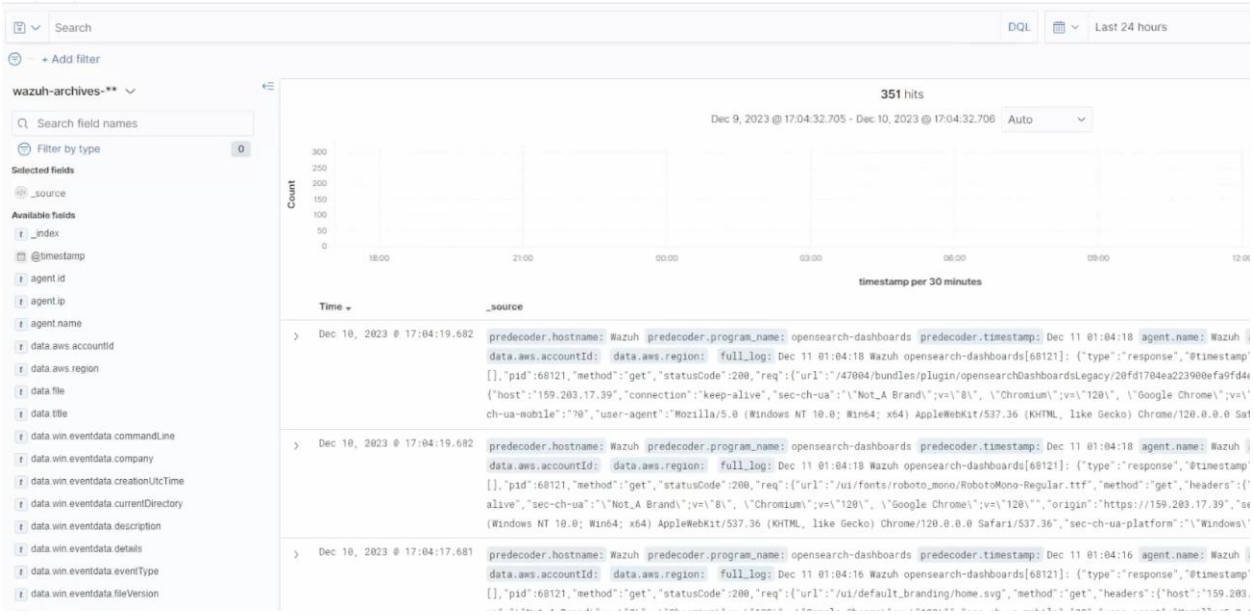
mimikatz # _
```






root@Wazuh: /var/ossec/logs/archives — ssh root@159.203.17.39
...gs/archives — ssh root@159.203.17.39
...ive: ~ — ssh root@143.110.217.149
root@Wazuh:~# cp /var/ossec/etc/ossec.conf ~/ossec-backup.conf
root@Wazuh:~# nano /var/ossec/etc/ossec.conf
root@Wazuh:~# systemctl restart wazuh-manager.service
root@Wazuh:~# cd /var/ossec/logs/archives/
root@Wazuh:/var/ossec/logs/archives# ls
2023 archives.json archives.log
root@Wazuh:/var/ossec/logs/archives#


Index patterns
Create and manage the index patterns that help you retrieve your data from OpenSearch.
Search...
Pattern
wazuh-alerts-*
Default
wazuh-monitoring-*
wazuh-statistics-*
Rows per page: 10




```
<!-- Local rules -->

<!-- Modify it at your will. -->
<!-- Copyright (C) 2015, Wazuh Inc. -->

<!-- Example -->
<group name="local,syslog,sshd,">

  <!--
  Dec 10 01:02:02 host sshd[1234]: Failed none for root from 1.1.1.1 port 1066 ssh2
  -->
  <rule id="100001" level="5">
    <if_sid>5716</if_sid>
    <srcip>1.1.1.1</srcip>
    <description>sshd: authentication failed from IP 1.1.1.1.</description>
    <group>authentication_failed,pci_dss_10.2.4,pci_dss_10.2.5,</group>
  </rule>

  <rule id="100002" level="15">
    <if_group>sysmon_event1</if_group>
    <field name="win.eventdata.originalFileName" type="pcre2">(?i)mim\.exe</field>
    <options>no_full_log</options>
    <description>Scripting interpreter spawned a new process</description>
    <mitre>
      <id>T1059.005</id>
    </mitre>
```

local_rules.xml

Changes will not take effect until a restart is performed.

```
<!-- Local rules -->

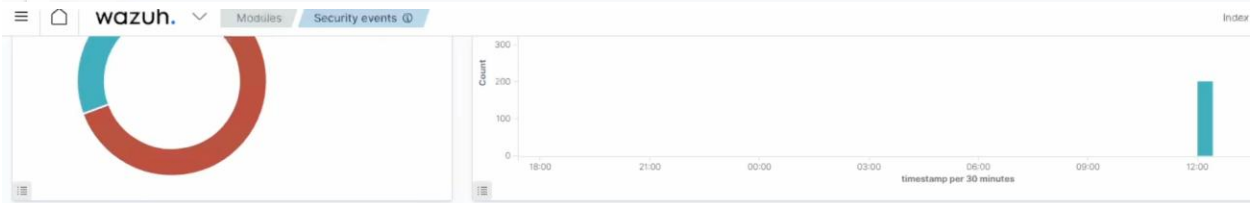
<!-- Modify it at your will. -->
<!-- Copyright (C) 2015, Wazuh Inc. -->

<!-- Example -->
<group name="local,syslog,sshd,">

  <!--
  Dec 10 01:02:02 host sshd[1234]: Failed none for root from 1.1.1.1 port 1066 ssh2
  -->
  <rule id="100001" level="5">
    <if_sid>5716</if_sid>
    <srcip>1.1.1.1</srcip>
    <description>sshd: authentication failed from IP 1.1.1.1.</description>
    <group>authentication_failed,pci_dss_10.2.4,pci_dss_10.2.5,</group>
  </rule>

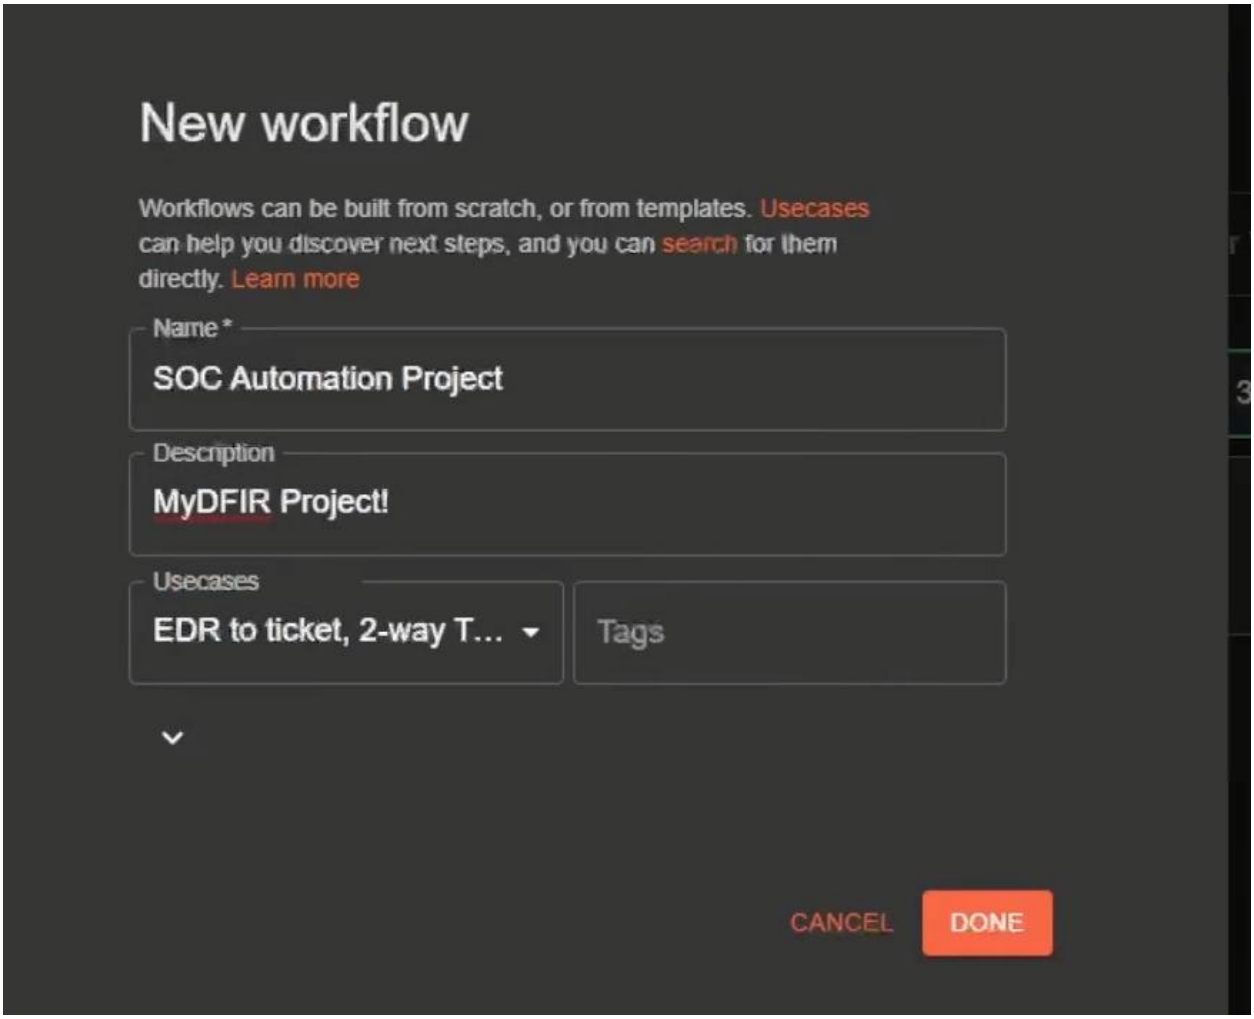
  <rule id="100002" level="15">
    <if_group>sysmon_event1</if_group>
    <field name="win.eventdata.originalFileName" type="pcre2">(?i)mimikatz\.exe</field>
    <description>Mimikatz Usage Detected</description>
    <mitre>
      <id>T1003</id>
    </mitre>
  </rule>

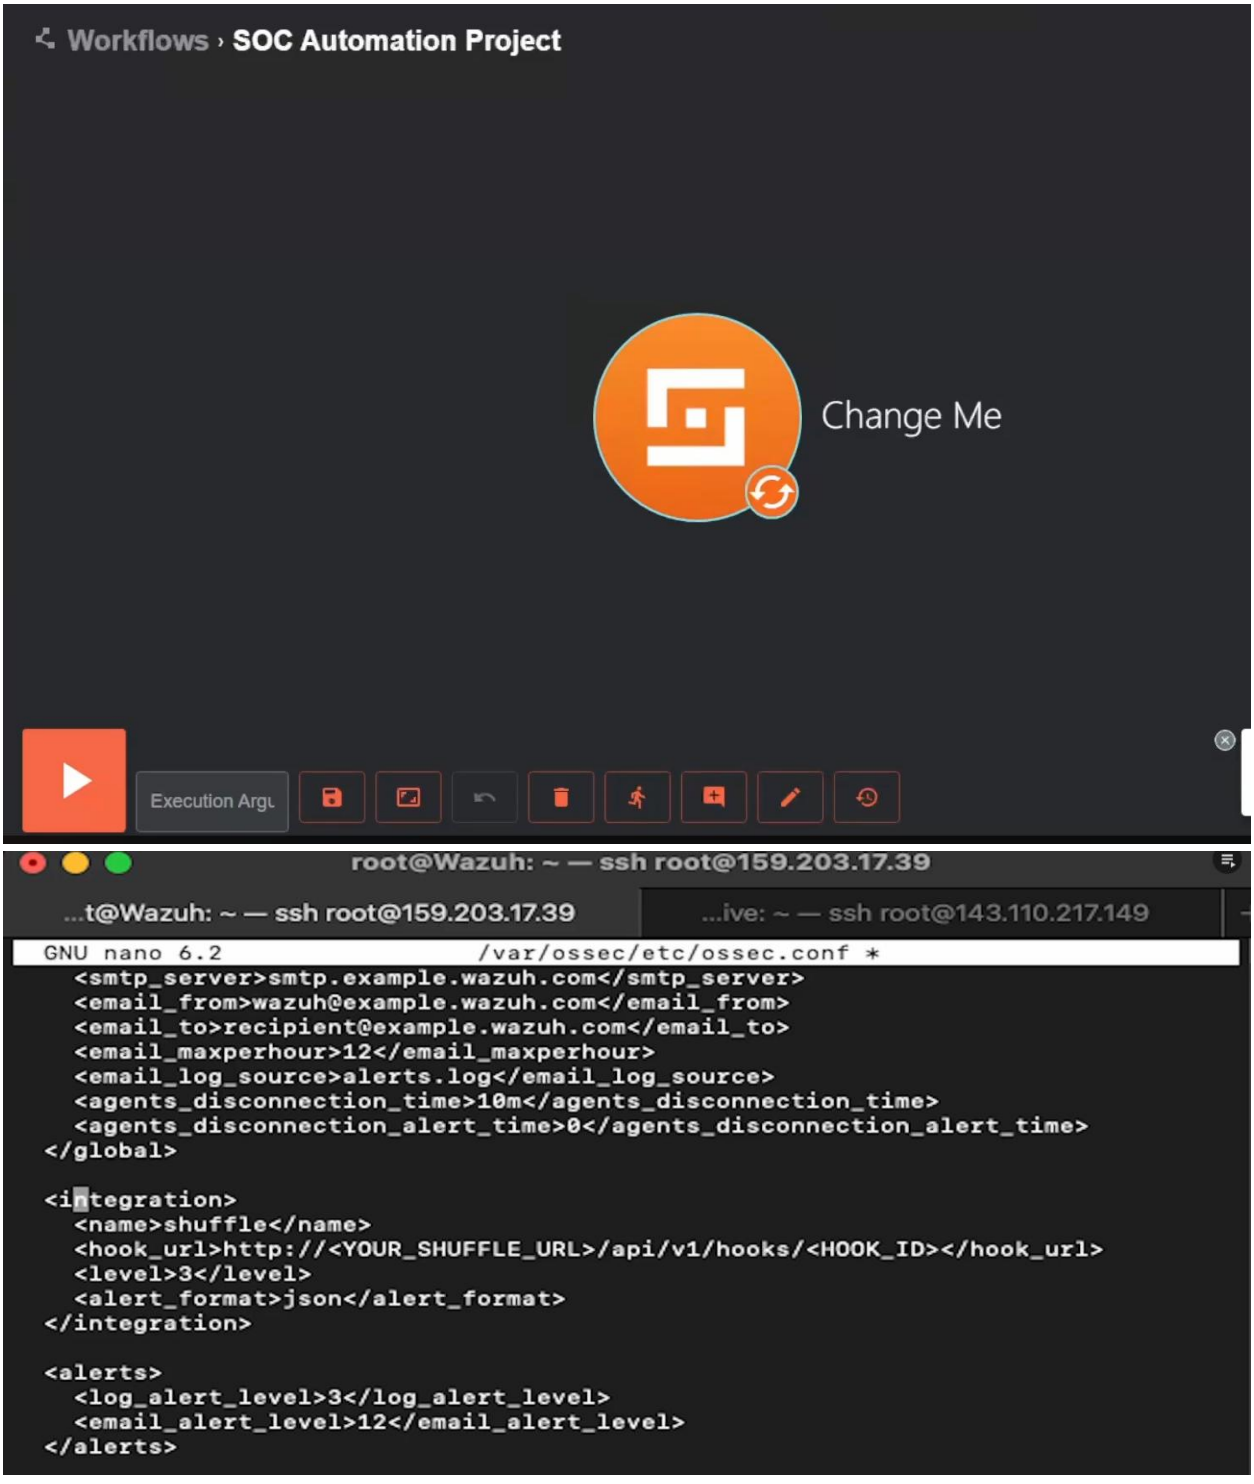
</group>
```

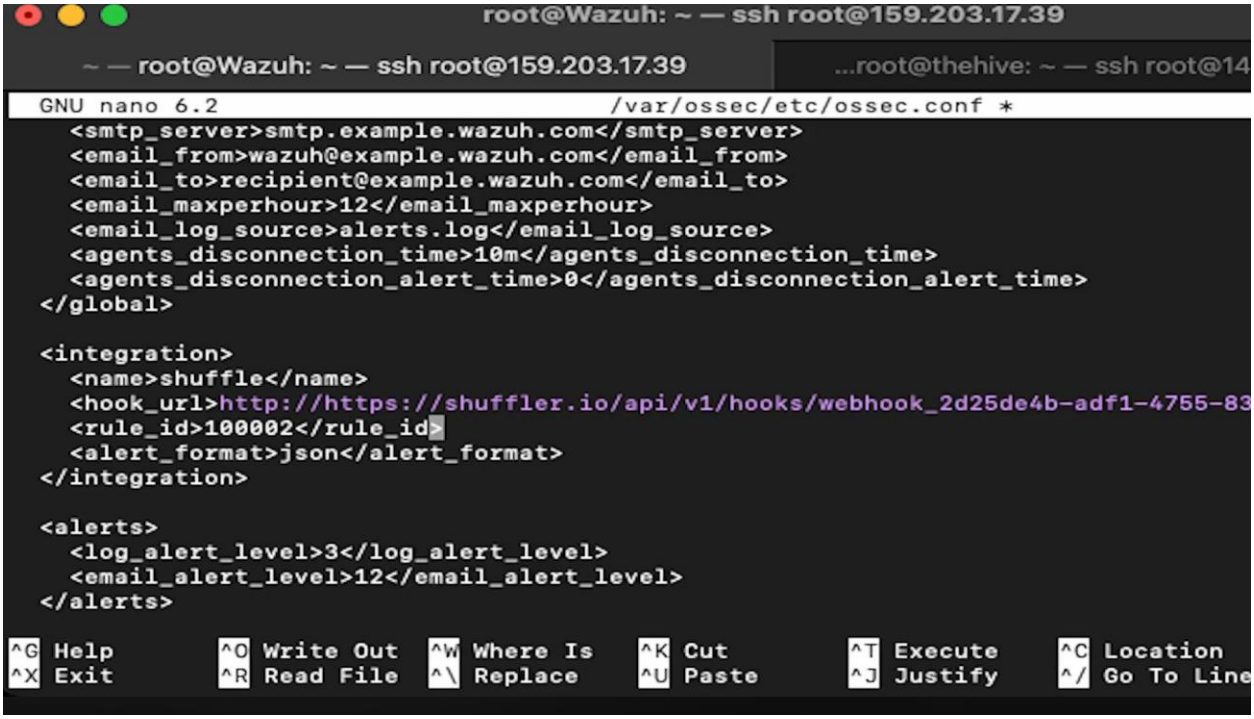


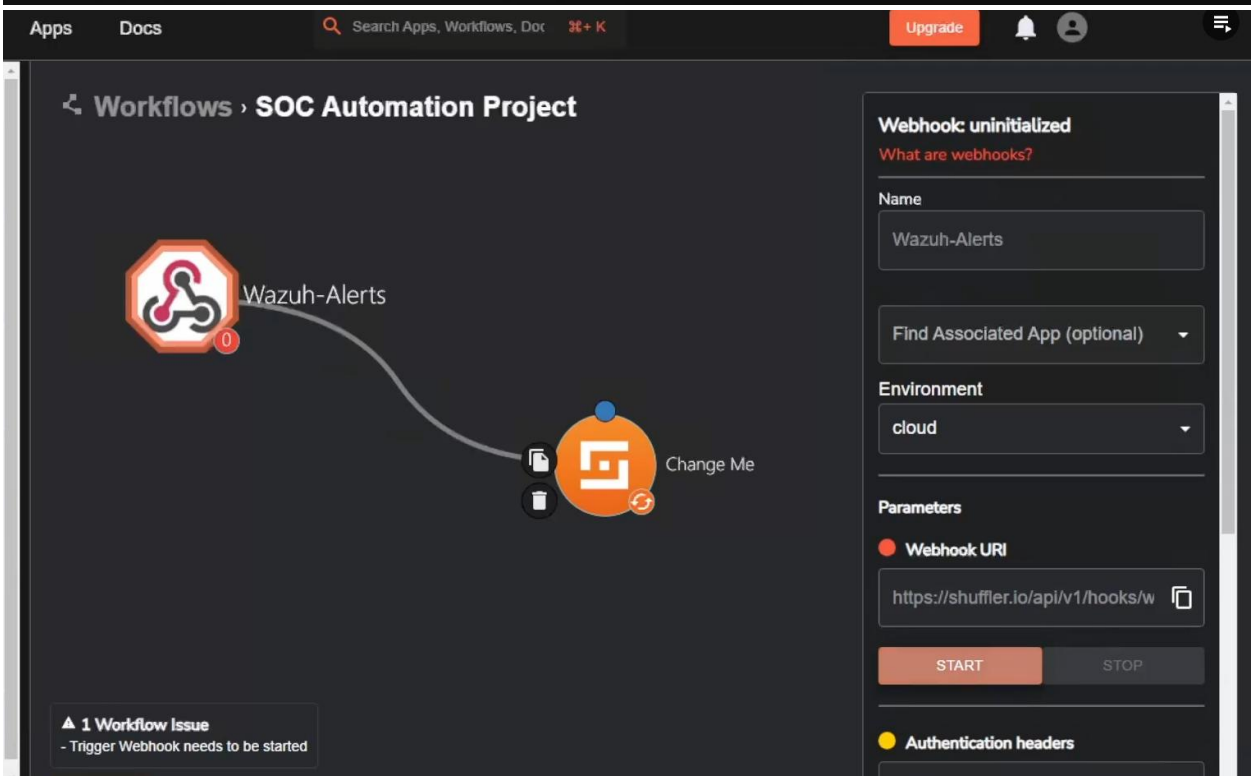
Security Alerts

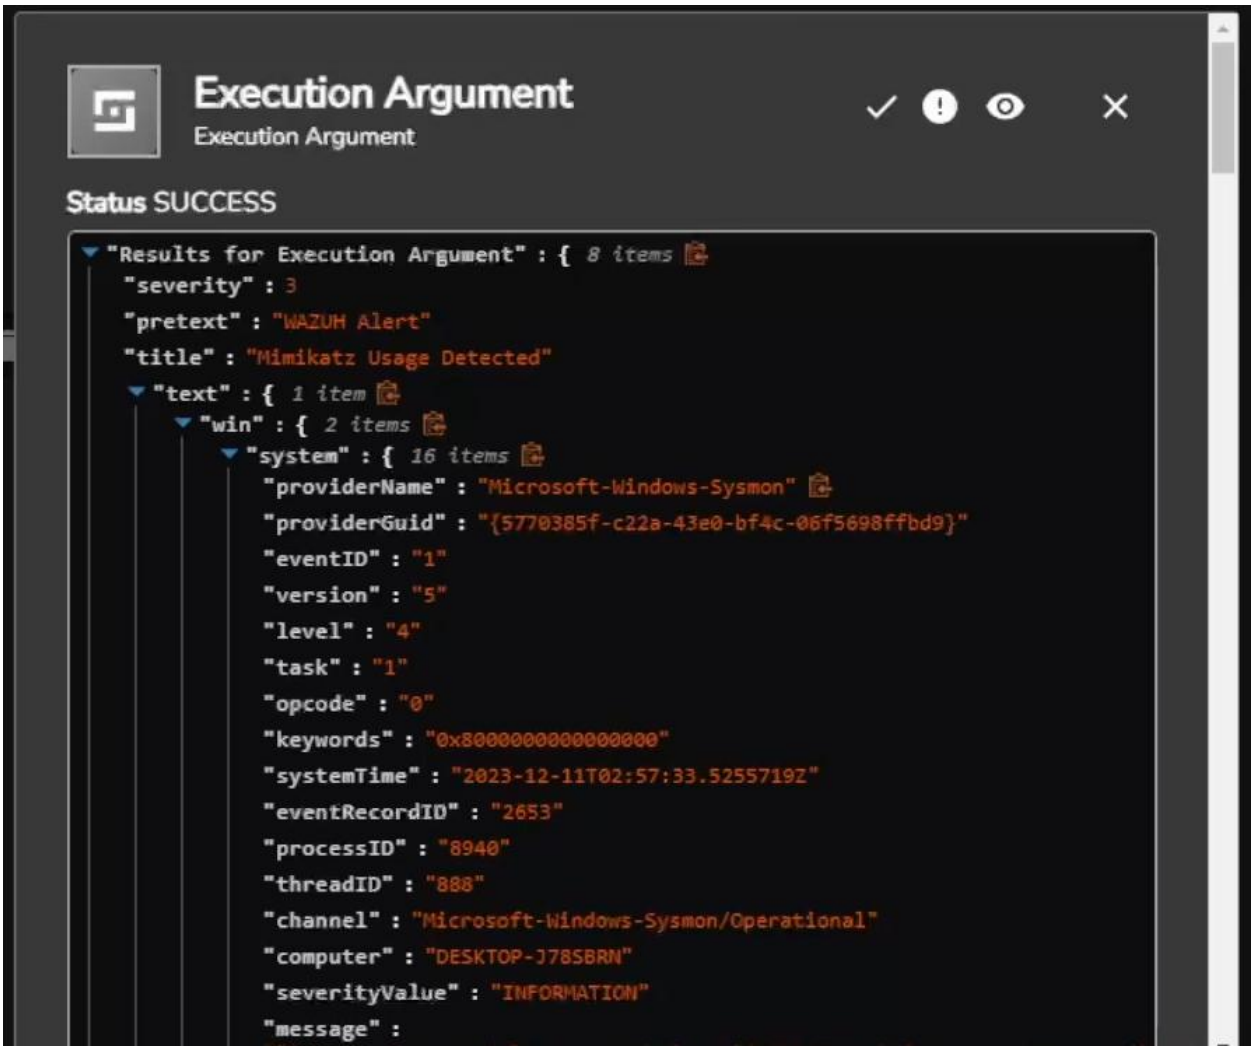
Time	Agent	Agent name	Technique(s)	Tactic(s)	Description
Dec 10, 2023 @ 17:22:56.386	001	mydfir			Windows Sysmon error event
Dec 10, 2023 @ 17:21:21.054	000	Wazuh			Wazuh server started.
Dec 10, 2023 @ 17:21:08.966	000	Wazuh			Host-based anomaly detection event (rootcheck).
Dec 10, 2023 @ 17:21:08.966	000	Wazuh			Host-based anomaly detection event (rootcheck).
Dec 10, 2023 @ 17:12:31.165	001	mydfir	T1053.005	Execution, Persistence, Privilege Escalation	Process loaded taskschd.dll module. May be used to create delayed malware executior
Dec 10, 2023 @ 17:02:28.959	001	mydfir	T1570	Lateral Movement	Executable dropped in Windows root folder
Dec 10, 2023 @ 17:02:28.926	001	mydfir	T1570	Lateral Movement	Executable dropped in Windows root folder

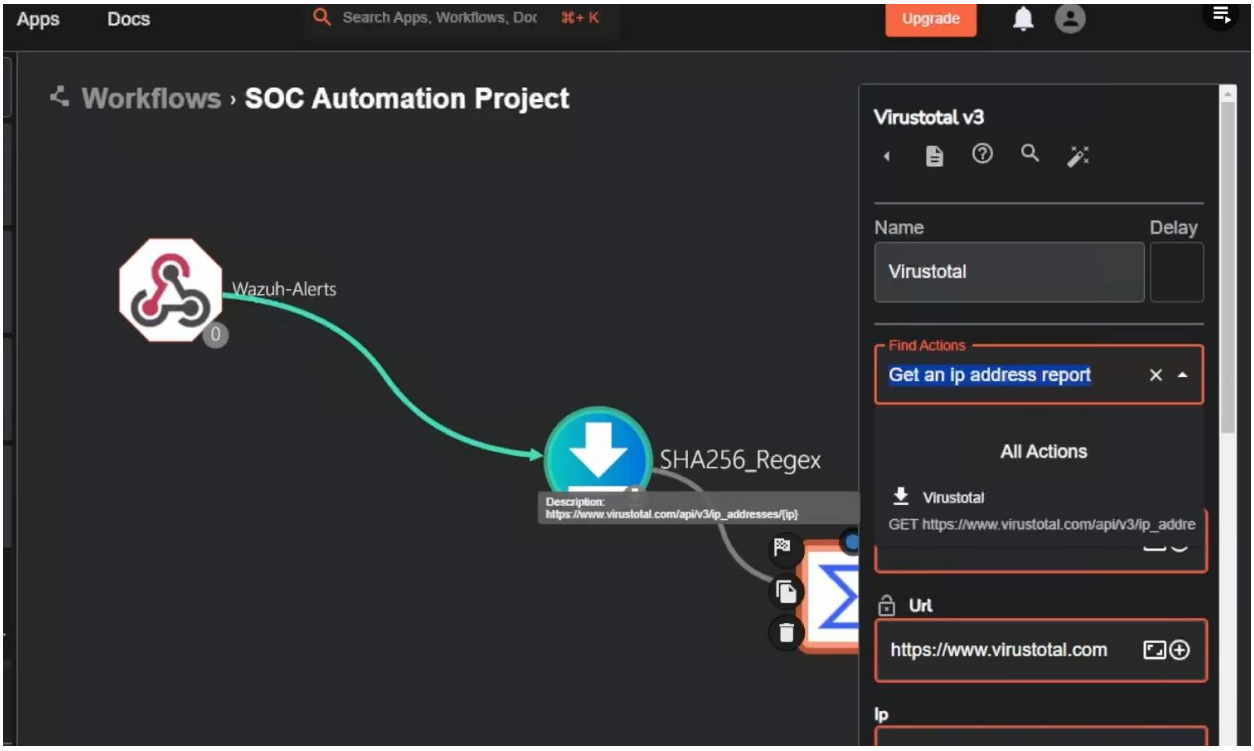

New workflow
Workflows can be built from scratch, or from templates. Usecases can help you discover next steps, and you can search for them directly. Learn more
Name *
SOC Automation Project
Description
MyDFIR Project!
Usecases
EDR to ticket, 2-way T...
Tags
CANCEL
DONE

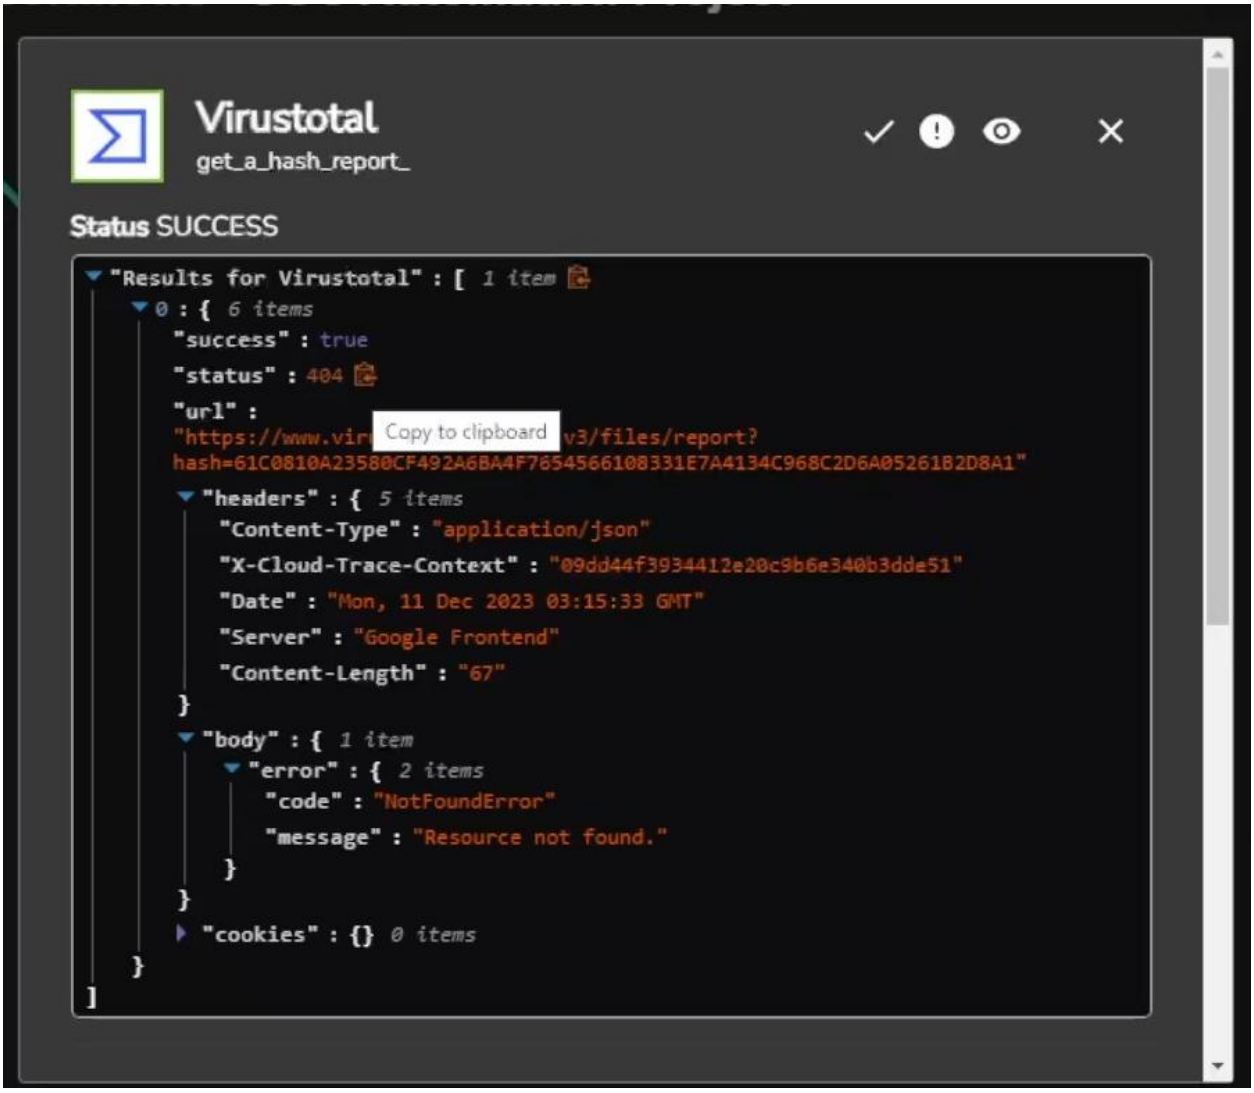

Workflows › SOC Automation Project
Change Me
Execution Argu
root@Wazuh: ~ — ssh root@159.203.17.39
...t@Wazuh: ~ — ssh root@159.203.17.39
...ive: ~ — ssh root@143.110.217.149
GNU nano 6.2 /var/ossec/etc/ossec.conf *
<smtp_server>smtp.example.wazuh.com</smtp_server>
<email_from>wazuh@example.wazuh.com</email_from>
<email_to>recipient@example.wazuh.com</email_to>
<email_maxperhour>12</email_maxperhour>
<email_log_source>alerts.log</email_log_source>
<agents_disconnection_time>10m</agents_disconnection_time>
<agents_disconnection_alert_time>0</agents_disconnection_alert_time>
</global>
<integration>
<name>shuffle</name>
<hook_url>http://<YOUR_SHUFFLE_URL>/api/v1/hooks/<HOOK_ID></hook_url>
<level>3</level>
<alert_format>json</alert_format>
</integration>
<alerts>
<log_alert_level>3</log_alert_level>
<email_alert_level>12</email_alert_level>
</alerts>

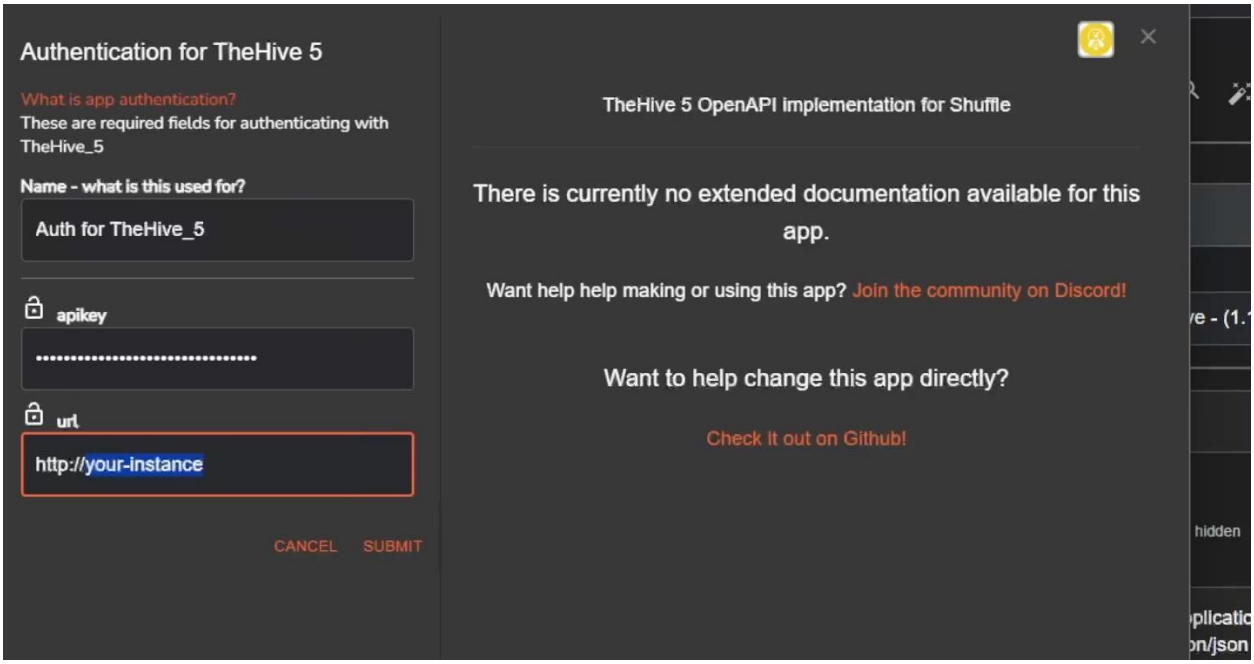

root@Wazuh: ~ — ssh root@159.203.17.39
~ — root@Wazuh: ~ — ssh root@159.203.17.39
...root@thehive: ~ — ssh root@14
GNU nano 6.2 /var/ossec/etc/ossec.conf *
<smtp_server>smtp.example.wazuh.com</smtp_server>
<email_from>wazuh@example.wazuh.com</email_from>
<email_to>recipient@example.wazuh.com</email_to>
<email_maxperhour>12</email_maxperhour>
<email_log_source>alerts.log</email_log_source>
<agents_disconnection_time>10m</agents_disconnection_time>
<agents_disconnection_alert_time>0</agents_disconnection_alert_time>
</global>
<integration>
<name>shuffle</name>
<hook_url>http://https://shuffler.io/api/v1/hooks/webhook_2d25de4b-adf1-4755-83
<rule_id>100002</rule_id>
<alert_format>json</alert_format>
</integration>
<alerts>
<log_alert_level>3</log_alert_level>
<email_alert_level>12</email_alert_level>
</alerts>
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line


Apps
Docs
Search Apps, Workflows, Doc
⌘+ K
Upgrade
Workflows › SOC Automation Project
Wazuh-Alerts
Change Me
Webhook: uninitialized
What are webhooks?
Name
Wazuh-Alerts
Find Associated App (optional)
Environment
cloud
Parameters
Webhook URI
https://shuffler.io/api/v1/hooks/w
START
STOP
Authentication headers
1 Workflow Issue
- Trigger Webhook needs to be started


Execution Argument
Execution Argument
Status SUCCESS
"Results for Execution Argument" : { 8 items
"severity" : 3
"pretext" : "WAZUH Alert"
"title" : "Mimikatz Usage Detected"
"text" : { 1 item
"win" : { 2 items
"system" : { 16 items
"providerName" : "Microsoft-Windows-Sysmon"
"providerGuid" : "{5770385f-c22a-43e0-bf4c-06f5698ffbd9}"
"eventID" : "1"
"version" : "5"
"level" : "4"
"task" : "1"
"opcode" : "0"
"keywords" : "0x8000000000000000"
"systemTime" : "2023-12-11T02:57:33.5255719Z"
"eventRecordID" : "2653"
"processID" : "8940"
"threadID" : "888"
"channel" : "Microsoft-Windows-Sysmon/Operational"
"computer" : "DESKTOP-J78SBRN"
"severityValue" : "INFORMATION"
"message" :


Apps
Docs
Search Apps, Workflows, Doc
⌘+ K
Upgrade
Workflows › SOC Automation Project
Wazuh-Alerts
0
SHA256_Regex
Description:
https://www.virustotal.com/api/v3/ip_addresses/{ip}
Virustotal v3
Name
Delay
Virustotal
Find Actions
Get an ip address report
All Actions
Virustotal
GET https://www.virustotal.com/api/v3/ip_addre
Url
https://www.virustotal.com
Ip


Virustotal
get_a_hash_report_
Status SUCCESS
"Results for Virustotal" : [1 item
0 : { 6 items
"success" : true
"status" : 404
"url" :
"https://www.vir
Copy to clipboard
v3/files/report?
hash=61C0810A23580CF492A6BA4F7654566108331E7A4134C968C2D6A0526182D8A1"
"headers" : { 5 items
"Content-Type" : "application/json"
"X-Cloud-Trace-Context" : "09dd44f3934412e20c9b6e340b3dde51"
"Date" : "Mon, 11 Dec 2023 03:15:33 GMT"
"Server" : "Google Frontend"
"Content-Length" : "67"
}
"body" : { 1 item
"error" : { 2 items
"code" : "NotFoundError"
"message" : "Resource not found."
}
}
"cookies" : {} 0 items
}
]



Tags

T1003

Description

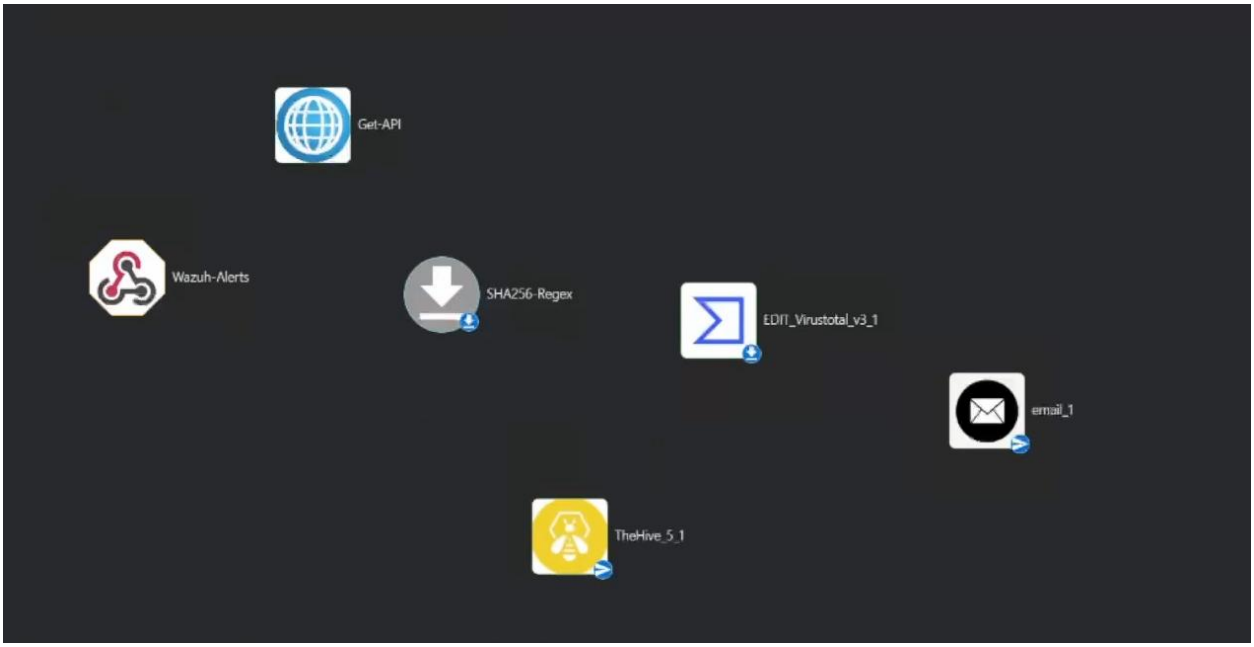
Mimikatz Detected on host:DESKTOP-J78SBRN from user:DESKTOP-J78SBRN\sally

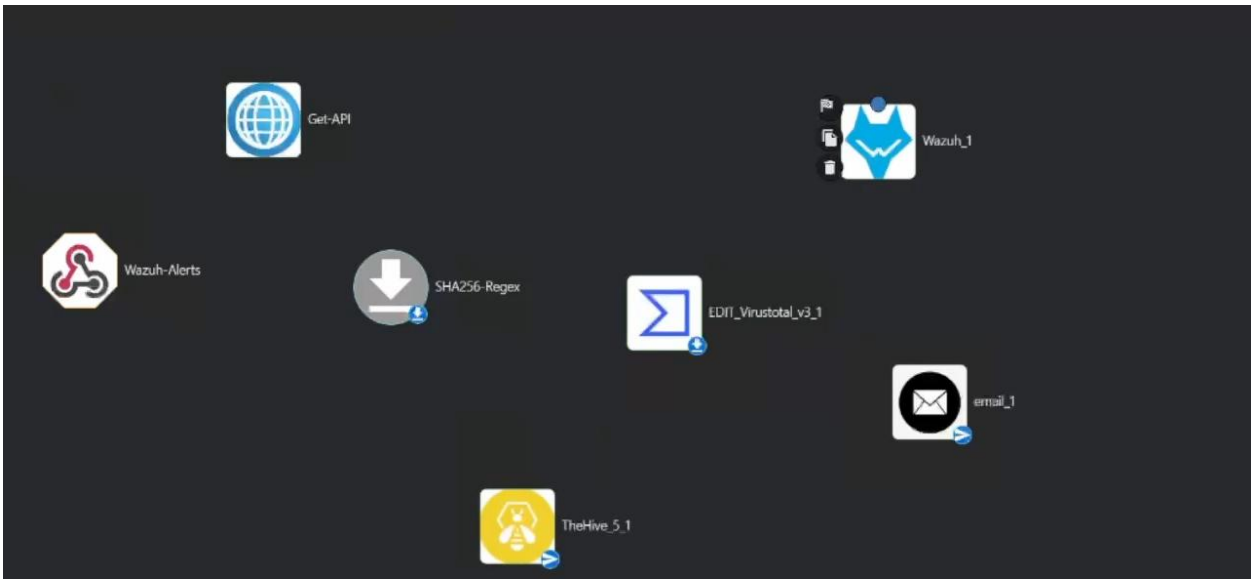
Summary

Mimikatz activity detection on host:DESKTOP-J78SBRN and the process ID is:9848 and the Command line is:"C:\Users\sally\Downloads\mimikatz_trunk\x64\youareawesome.exe"

Edit

Comments

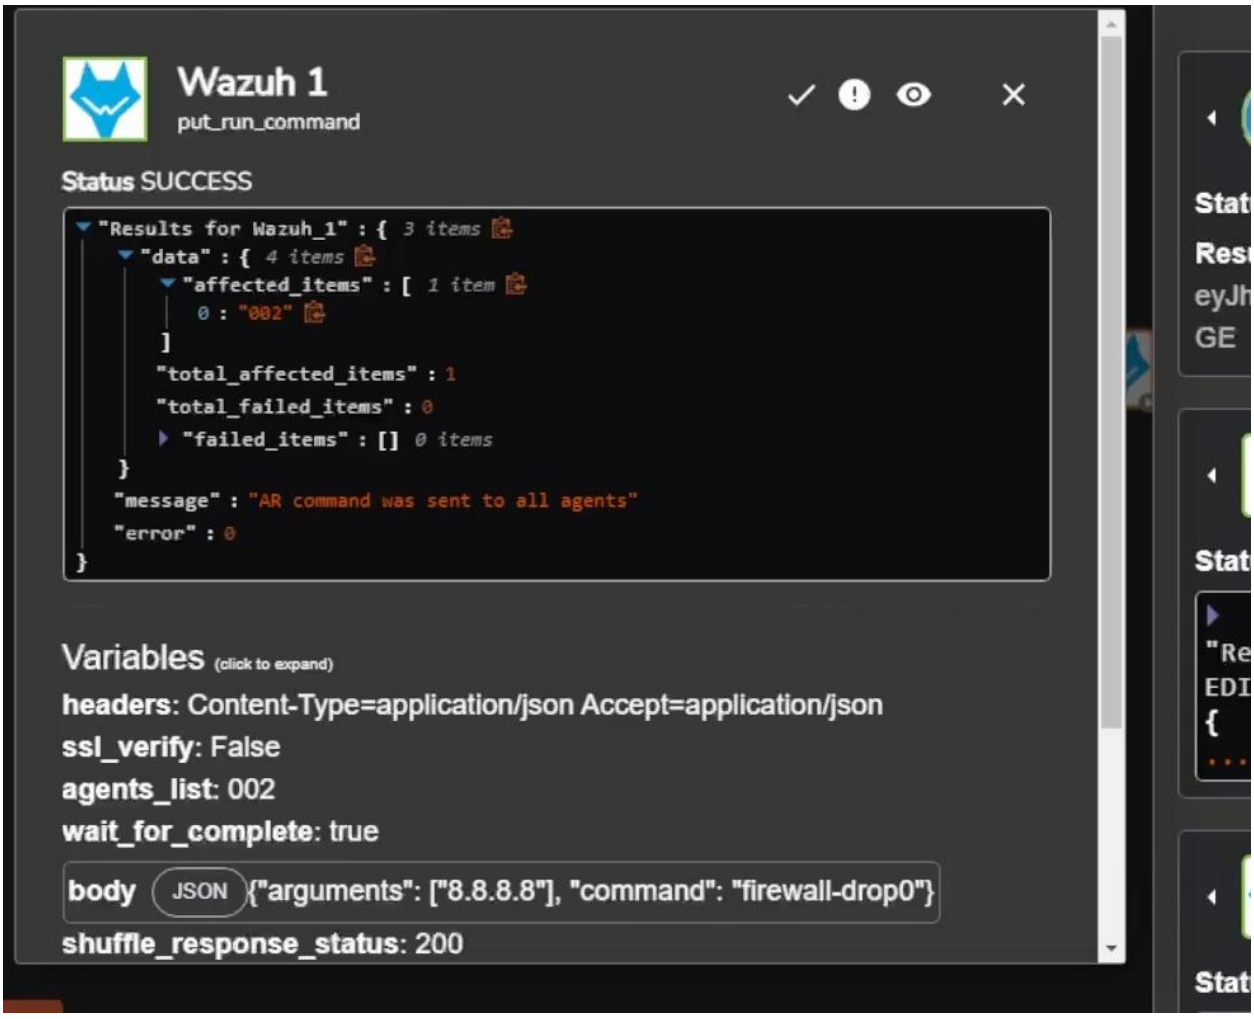

Get-API
Wazuh-Alerts
SHA256-Regex
EDIT_Virustotal_v3_1
email_1
TheHive_5_1

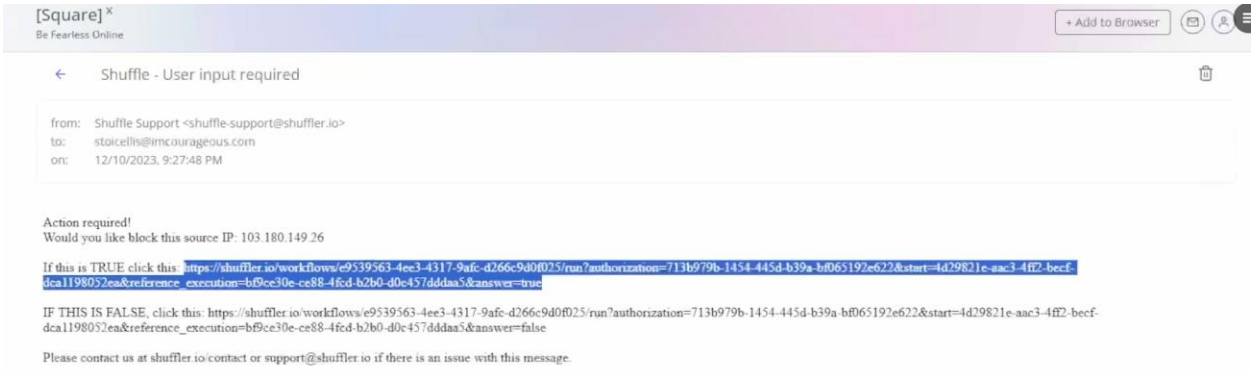

Get-API
Wazuh_1
Wazuh-Alerts
SHA256-Regex
EDIT_Virustotal_v3_1
email_1
TheHive_5_1

```
  <command>
    <name>netsh</name>
    <executable>netsh.exe</executable>
    <timeout_allowed>yes</timeout_allowed>
  </command>

  <active-response>
    <command>firewall-drop</command>
    <location>local</location>
    <level>5</level>
    <timeout>no</timeout>
  </active-response>

  <!-- Log analysis -->
  <localfile>
    <log_format>command</log_format>
    <command>df -P</command>
    <frequency>360</frequency>
```


Wazuh 1
put_run_command
Status SUCCESS
"Results for Wazuh_1" : { 3 items
"data" : { 4 items
"affected_items" : [1 item
0 : "002"
]
"total_affected_items" : 1
"total_failed_items" : 0
"failed_items" : [] 0 items
}
"message" : "AR command was sent to all agents"
"error" : 0
}
Variables (click to expand)
headers: Content-Type=application/json Accept=application/json
ssl_verify: False
agents_list: 002
wait_for_complete: true
body JSON {"arguments": ["8.8.8.8"], "command": "firewall-drop0"}
shuffle_response_status: 200


[Square]
Be Fearless Online
+ Add to Browser
Shuffle - User input required
from: Shuffle Support <shuffle-support@shuffler.io>
to: stoicellis@imcourageous.com
on: 12/10/2023, 9:27:48 PM
Action required!
Would you like block this source IP: 103.180.149.26
If this is TRUE click this: https://shuffler.io/workflows/e9539563-4ee3-4317-9afc-d266c9d0f025/run?authorization=713b979b-1454-445d-b39a-bf065192e622&start=4d29821e-aac3-4ff2-becf-dca1198052ea&reference_execution=bf9ce30e-ce88-4fcd-b2b0-d0c457dddaa5&answer=true
IF THIS IS FALSE, click this: https://shuffler.io/workflows/e9539563-4ee3-4317-9afc-d266c9d0f025/run?authorization=713b979b-1454-445d-b39a-bf065192e622&start=4d29821e-aac3-4ff2-becf-dca1198052ea&reference_execution=bf9ce30e-ce88-4fcd-b2b0-d0c457dddaa5&answer=false
Please contact us at shuffler.io/contact or support@shuffler.io if there is an issue with this message.