

The π -calculus

A Thesis
Presented to
The Division of Mathematics and Natural Sciences
Reed College

In Partial Fulfillment
of the Requirements for the Degree
Bachelor of Arts

William Henderson

May 2008

Approved for the Division
(Mathematics)

James Fix

Table of Contents

Acknowledgments	ii
Preface	iii
A Word About Formatting	iii
Abstract	iv
Chapter 1: Introduction	1
1.1 Distributed Systems	2
1.2 Process Algebra	3
1.3 The π -calculus: An Introduction	4
1.4 An Outline of This Thesis	6
Chapter 2: The π-Calculus	8
2.1 Syntax	8
2.2 Structural Equivalence	11
2.2.1 Identifier Substitution and α -equivalence	11
2.2.2 Contexts and Equivalence	13
2.3 Reduction Semantics	14
2.4 Action Semantics	16
2.5 Extended Example: Memory Cells	20
Chapter 3: The Synchronous π-Calculus	25
3.1 The Synchronous π -Calculus	26
3.2 Computation in the Synchronous π -Calculus	27
3.3 Extended Example: Leader Elections	29
Chapter 4: Synchronicity and Distributed Systems	31
4.1 Separation Results	31
4.2 Implications	33
4.3 The Bakery Algorithm	33
4.4 Symmetry in Practice	33
List of Figures	35
References	36
Index	37

Acknowledgments

I want to thank my hamsters, Boris Becker, and this bottle of Merlot.

A Word About Formatting

One of the pedagogical aims of this thesis is to be as clear and reader-assistive as possible during its presentation. To that end, I have taken several liberties in the formatting of this thesis. Figures, equations, definitions, theorems and examples all share one numbering scheme in hopes that it will make them easier to locate. Where *definitions* appear, they are clad in italics as well as in a margin box to make them easier to find. Equation numbers also appear in margin boxes. When definitions or equations are referred to later in the text, an assistive link will appear in the margin to avoid index-fingering. To this end, the wired reader will note the presence within the backcover of a searchable pdf version of the text, wherein all references are hyper-textual (clickable). The included CD also contains all the code referenced in this thesis.

definitions

definitions
↪ [page iii](#)

Abstract

In this thesis I will blow your mind, and possibly (hopefully?) my own in the process.

1

Introduction

Computer scientists have long been interested in algebraic models that are capable of describing computation by formulating a ‘program’ as an algebraic expression along with a set of rules for reducing such expressions — i.e. ‘running’ them. The advantage of such algebras is that they can be studied using formal reasoning techniques. This means that we can rigorously prove things about them and derive useful observations ‘programming’ in them without actually ever having to implement them on a system. Of course, these algebras often are used in real languages whether faithfully or in part, but this is usually after they have been studied in detail for some time and we can be sure of their value.

In the 1930’s, Alonzo Church and Stephen Kleene introduced one such algebra, known as the λ -calculus. In the λ -calculus, we can write programs as expressions that are a series of nested functions, and we can run these programs by invoking the functions within. A function is indicated by the λ symbol, followed by a single variable representing its input. For example, the following is a very simple ‘successor’ program that takes in a number x and adds 1 to it, returning the result:

$$(\lambda x.x + 1)$$

To run this program, we need to actually apply it to something — that is, we need to give it input. We express this by placing the input to the right of the function, as in:

$$(\lambda x.x + 1)4$$

The above program first substitutes 4 in for the input x , yielding $4+1$. The program then returns the result, 5. Since we can nest functions, a slightly more complicated version adds 1 to the input 4 and then multiplies the result by 3. We give this program with each computational ‘step’ below:

$$\begin{aligned} &(\lambda y.y * 3)((\lambda x.x + 1)4) \\ &(\lambda y.y * 3)(4 + 1) \\ &(\lambda y.y * 3)5 \\ &5 * 3 \\ &15 \end{aligned}$$

You are probably already getting a sense of the expressive power of the λ -calculus. In fact, it is capable of expressing *any* computer algorithm, even without the numbers and arithmetic operators we have implicitly included above! Besides allowing the proof of several important results in computer science, the λ -calculus went on to inspire many programming languages like Lisp, ML and Haskell, and even some functionality in languages like Smalltalk, Ruby and Python.

1.1 Distributed Systems

distributed systems

The discovery of the λ -calculus did not end the search for new algebra. More recently, new kinds of programs and demands have emerged with the computational platform of *distributed systems*. These systems consist of loose networks of machines capable of exchanging messages and information. We say this shared information and computational power belongs to ‘the system’ in that any program running on the machines of the system can freely access these resources and generally behaves just as it would running on a single machine.

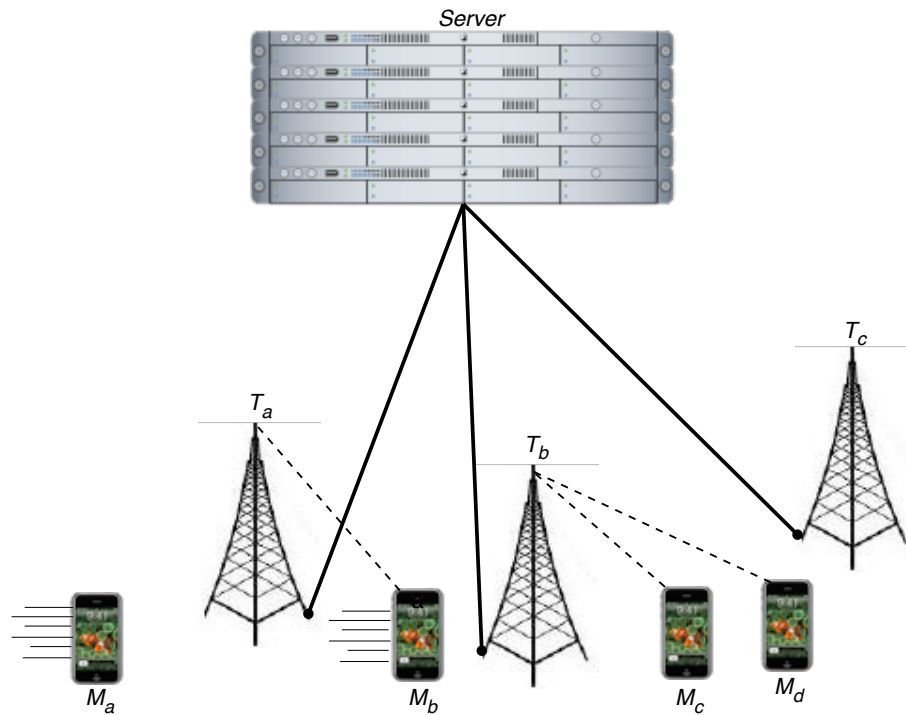


Figure 1.1.1: A Distributed Mobile System

For example, consider the familiar system that powers your mobile phone network. There may be one or more connected central servers, all of which are connected to the various towers that provide service. Towers and servers may have different capabilities and responsibilities, but the important thing is that the entire system needs to behave as a single unit with a bunch of shared information and computational power. A call

in progress, for example, is a resource that will need to be accessed in various places in the system — by a tower to handle the call, by a server, perhaps, to handle the billing and routing of that call.

Mobile clients are also connected and a part of this system. When a user places a call, for example, he may use some capabilities on the phone to input the number, which is transmitted by the phone to the tower and then sent to the server to be routed. This entire ‘program’ for making a call is one seamless operation that is happening across several machines.

The demands of a distributed system strain the expressive power of the λ -calculus. Since the λ -calculus models all computation via functions, our only means of modeling a resource is as a function. Functions can only be accessed directly – input can be passed to a function only by directly applying the function to that input. But if we want access to a resource on a system, we might not know where it is or what it is doing. Furthermore, our system of many machines could be doing many different things at once: routing calls, handling other calls in session, calculating a bill. Yet the λ -calculus has no means of easily expressing this concurrency which is so basic to many distributed systems.

Consider the phones on our system. They are *mobile* — in the sense that their connections to the system can be added and removed at any time. In Figure 1.1.1 above, client M_b is wirelessly connected to tower T_a while M_c, M_d are connected to T_b . Client M_a is currently disconnected and T_c has no clients. All the towers maintain a hard-wired link to *server*. We refer to the connections in a distributed system as its communication *topology*.

Furthermore, M_a and M_b are in physical movement and their connections may change soon. M_b might, for example, go out of range and disconnect from T_a and connect to T_b instead. Such changing communication topologies present even more difficulties to the λ -calculus. How can we abstract function invocation such that a function can be called from one place at one time, and another place later? Even if we could somehow invoke a function indirectly, how could we deal with the fact that a function (say a client’s ability to receive a call) is not currently available?

1.2 Process Algebra

Clearly we need an algebraic model for computation that eases the difficulty of modeling such systems. Such a model might consider computation via its natural distributed unit — the *process*. A process is just a computational task, without reference to where it might be run nor with what input. For example, we might make a conversation on a phone somewhere in our network a process. Since concurrency of processes is such a basic operation, we make it a part of our algebra. A system, then, is simply a group of processes which are executing concurrently. An important thing about processes is that they maintain computation state independently of one another. Instead of a single program state where functions interact via invocation, processes run independently and interact via *message passing* – sending data back-and-forth via named channels.

Because these channels can be shared among processes and used an arbitrary number of times, channels are not a concrete invocation system for a chunk of computation the way a function call is — processes simply send values to channels, assuming the receiver (if there is one) will do something useful with it. As with functions in the λ -calculus, processes are the basic unit of a program in the π -calculus. Any bit of functionality can be referred to as a process, with no specification of the granularity.

A major step towards such an algebra came in the 1980's when Robin Milner introduced his Calculus of Communicating Systems (CCS). The CCS modeled systems as groups of communicating processes interacting via shared channels, and drastically eased the difficulty of modeling indirectly invoked concurrent operations. However, the CCS still would have had trouble with our mobile phone network, because it did not provide a way for processes to gain and lose their communication channels.

Although it can be defined in other ways, one of the ways of giving a process's *location* is in terms of the communication channels which can be used to access it. Since processes are the units populating the space of a CCS system, it is natural to think of a process's location in terms of the processes which are 'near' it — those it can connect to. Since communication happens via channels, a connection between processes just means that they share at least one channel. In this way, changing the communication channel topology of a system changes the locations of its component processes.

In the CCS, channel topology is static — it does not allow new connections to be made or old ones to be removed. Not long after CCS's birth, Robin Milner, Joachim Parrow and David Walker created an improved algebra called the π -calculus. The π -calculus allows communication channels to be dynamically established and relinquished between processes. Since channels are what define location, dynamically created and destroyed channels give a kind of *mobility* of processes, which vastly expands the capabilities of interaction in a system and finally allows us to give an account of our mobile phone system.

1.3 The π -calculus: An Introduction

As an example of how naturally the π -calculus models distributed systems, let us again consider our mobile phone network¹. Our system will be simplified a bit: only two towers and one phone, with the only system functionality being talking on the phone or switching from one tower to another.

First we give a process describing the behavior of a mobile phone:

$$Mobile(talk, switch) \Leftarrow talk!\langle \rangle. Mobile\langle talk, switch \rangle + switch?(t, s). Mobile\langle t, s \rangle$$

Above, we use \Leftarrow to mean that the term to the right of the \Leftarrow is given the shorthand *Mobile* and that it uses the channels *talk* and *switch* given elsewhere. When the shorthand is used, which occurs with angle brackets $\langle \rangle$, the channels given in the brackets are simply substituted for the terms in the parenthesis. Hence, for example,

¹This presentation is adapted from a version first given in [Mil99]

$Mobile\langle t, s \rangle$ would be the right-hand term with the channels t and s substituted for $talk$ and $switch$. We call $Mobile(talk, switch)$ the *interface* of the right-hand term.

interface

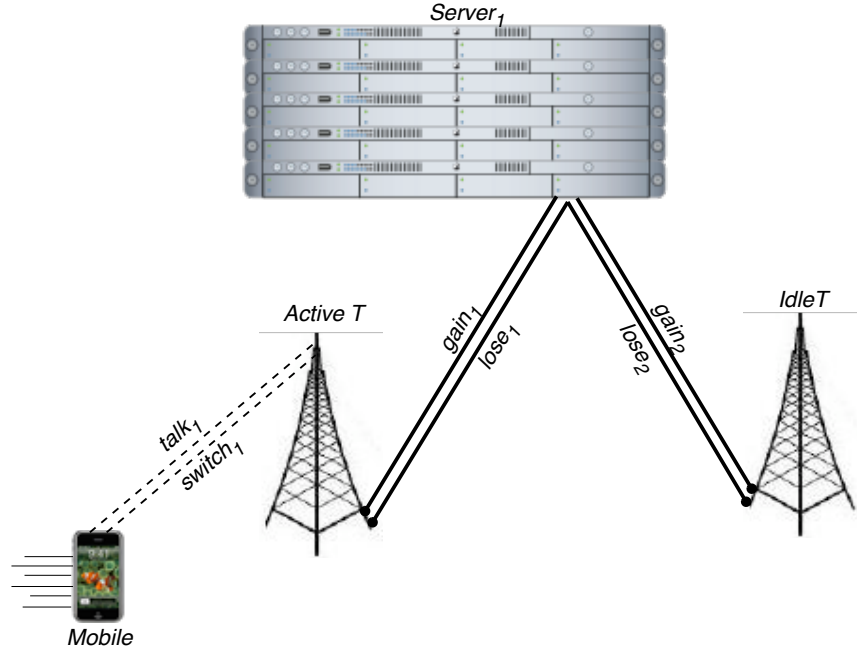


Figure 1.3.1: Simplified Mobile Phone Network in the π -calculus

The notation $talk!\langle \rangle$ means that we are sending an ‘empty’ (since there are no input values given in the brackets) signal on channel $talk$, while $switch?(t, s)$ means we are listening on $switch$ and receive the input t, s . After a signal is sent or received on a channel, execution then continues with the term immediately to the right of the term, using the input provided (if any).

Thus, $switch?(t, s).Mobile\langle t, s \rangle$ indicates that we should listen on $switch$ for the input t, s and then use t, s to ‘spawn’ a new computation of $Mobile$ with these new channels. The term $talk!\langle \rangle.Mobile\langle talk, switch \rangle$ means send a signal on $talk$ before spawning a computation of $Mobile$ with the same $talk, switch$ channels we are using. Finally, the $+$ operator denotes that we should choose to compute one or the other of the operands (but not both). In sum then, *mobile* has the ability to either send along $talk$ and stay in its current location, or it can receive on $switch$ and ‘move’ to the location where it has new talking and switching channels t, s . This last capability expresses the mobile nature of our processes with surprising elegance: here we have just expressed that channels $talk, switch$ are lost and new channels t, s are established.

Next we consider the behavior of a tower:

$$\begin{aligned}
 ActiveT(talk, switch, gain, lose) &\Leftarrow talk?().ActiveT\angle talk, switch, gain, lose \\
 &\quad + lose?(t, s).switch!\langle t, s \rangle.IdleT\langle gain, lose \rangle \\
 IdleT(gain, lose) &\Leftarrow gain?(t, s).ActiveT\langle t, s, gain, lose \rangle
 \end{aligned}$$

Here, there are two ‘states’ our tower can be in. It can be active in talking with a mobile phone, or it can be disconnected and idle. If it is active, it can either receive on *talk* (from the phone) and continue to be active, or it can receive on *lose* (from the server, as we shall see below). In the latter case it then sends *t, s* on *switch* before becoming idle. That is, it will receive some new channels *t, s* on *lose* and then send them to the phone on *switch* before becoming idle. An idle tower has only one capability: to receive on *gain* and then become active again on the new channels *t, s*.

Finally we give the behavior of the server:

$$\begin{aligned} Server_1 &\Leftarrow lose_1!(talk_2, switch_2).gain_2!(talk_2, switch_2).Server_2 \\ Server_2 &\Leftarrow lose_2!(talk_1, switch_1).gain_1!(talk_1, switch_1).Server_1 \end{aligned}$$

Above, the server has two states: it can be controlling tower 1 or it can be controlling tower 2. In either case, the only capability is to lose one tower and gain the other before going into the opposite state. Hence, in $Server_1$ we can send to the first tower on $lose_1$ and then to the second tower on $gain_2$ before entering state $Server_2$.

We have now completely described the components of our system, but we still haven’t put them all together. To do so, we’ll need a new operator. This operator denotes that its operands run concurrently in parallel and is denoted $|$. Thus, our system is simply:

$$Mobile(talk_1, switch_1) | ActiveT_1(talk_1, switch_1, gain_1, lose_1) | IdleT(gain_2, lose_2) | Server_1$$

1.4 An Outline of This Thesis

Now that we have gotten a taste of the power of the π -calculus, we are ready to explore it in more detail. However, our first pass at the π -calculus will not include some of the operators included in our mobile phone network example. For one, it will not include the $+$ operator. We will also use a version of sending that is a little simpler than the one we’ve seen so far. More specifically, our first calculus will be *asynchronous*, meaning that processes will not continue on with any computation after sending on a channel. That is, in a process like

$$c!\langle \rangle.P,$$

we will disallow the presence of P – the process will simply terminate after sending on c . In Chapter 2, we will give a rigorous presentation of the semantics of this asynchronous π -calculus and the rules describing the way computation happens.

The two simplifications mentioned above will make our calculus somewhat easier to grasp, but there is another reason to consider an asynchronous calculus: it is far easier to implement on a real distributed system than the full synchronous version. At the base level, communication between machines on a distributed system is asynchronous, so implementing synchronous calculi requires finding a way to simulate synchronous message passing using only asynchronous primitives. In Chapter 3, we will present the *synchronous* π -calculus (which has the full expressive power used in the mobile

asynchronous

synchronous

phone network example) and its computational rules.

Chapter 4 looks at the problem of modeling the synchronous π -calculus using the asynchronous version. It then takes a more practical-minded presentation of the way that a synchronous π -calculus-like language might be implemented using asynchronous primitive π -calculus constructs.

2

The π -Calculus

In this chapter, we will give the syntax of the *asynchronous* π -calculus and a discussion of its features. We will loosely follow the style of a recent presentation given in [Hen07]. Following this, we will introduce a notion of equivalence of terms in the language. There are two viewpoints from which the computation behavior of a process can be characterized. The first is a set of semantic reduction rules, given in Section 2.3, that focus on the way a process behaves in and of itself through internal evolution. The second viewpoint is more general and addresses how a process evolves in the context of a larger system. We give this important system in Section 2.4. Finally, we conclude the chapter with an extended example that provides an interesting π -calculus implementation while demonstrating many of its systems and rules.

2.1 Syntax

identifiers

The terms of the π -calculus operate on a space of *identifiers* which consists of names a, b, c, \dots, n, m, o for communication channels, and variables v, w, x which can refer to channels, and recursive variables p, q, r , explained in more detail below. In general, we will use capital letter to denote a process.

<i>Process terms</i>	
$R := R_1 \mid R_2$	Composition
$n!\langle \bar{V} \rangle$	Send
$n?(X).R$	Receive
$\text{new}(n).R$	Restriction
$\text{if } v_1 = v_2 \text{ then } R_1 \text{ else } R_2$	Matching
$\text{rec } p.R$	Recursion
stop	Termination
<i>System</i>	
$\text{new}(c_1, \dots, c_n).R_1 \mid \dots \mid R_m \quad n, m \geq 0$	

Figure 2.1.1: Terms in the asynchronous π -calculus

TODO:
Get index up to
snuff by making
sure more terms
are margin defined.

Given two or more processes, we can compose them using the \mid operator, which means that the composed processes will be executed concurrently.

We denote the sending of a message \bar{V} over a channel n by $n!\langle\bar{V}\rangle$. Here \bar{V} is a tuple of identifiers in the form $\bar{V} = (v_1, \dots, v_k) : k \geq 0$. We say that \bar{V} has *arity* k . In the case $k = 0$ nothing is being transmitted; the communication acts as a *handshake* or signal. We will denote this case by $n!\langle\rangle$. When $k = 0$, only a single value v_1 is being transmitted, in which case we write $n!\langle v_1 \rangle$. Because our calculus is asynchronous, sending is not a *guarded* operation – that is, a send operation does not continue to execute any process after sending its value, but simply terminates after sending the value. We will show in [Example 2.1.9](#) that synchronous behavior can still be modeled in our language.

The term $n?(\bar{X}).R$ describes a process waiting to receive a tuple along n before continuing with R . Here \bar{X} is a *pattern* – a tuple of variables of arity k – which can be used anywhere in R . Patterns allow us to decompose the transmitted tuple into its component values by naming them with x_1, \dots, x_k , which can be referred to in R . Thus, in the term

$$c!\langle n_1, n_2, n_3 \rangle \mid c?(x_1, x_2, x_3).R, \quad (2.1.2)$$

the names n_1, n_2, n_3 are received via c and correspond to the variables x_1, x_2, x_3 in the pattern. Hence, the variables x_1, x_2, x_3 can be used anywhere within the process R to mean n_1, n_2, n_3 .

Similarly to sending, the case of arity 0 is denoted $n?().R$ – here R will not happen until a handshake is received on n . Notice that in contrast to the case of sending, receiving is a *guarded* operation – that is, the process R will execute after \bar{X} has been received via n . For example, the term

$$c?().stop \quad (2.1.3)$$

represents a ‘listener’ process that simply consumes the value waiting on input channel c . The term *stop* describes a process that does nothing but halt.

The term $\text{new}(n).R$ describes a process in which a new channel name n is created and limited to being expressed in the process R (we say the *scope* of n is *restricted* to R). We shall see that scope plays a very big role in the way processes can establish new connections. Essentially, for a process P to have a connection to another process R really means that they both ‘know’ about a common channel c . In that case, c is scoped P and R . Hence, $\text{new}(n).R$ really means that we have created a channel n that – for the time being – only process R knows about. It is important to note that n *can* be used outside of R if it is sent and then received by some outside process. This feature is known as *scope extrusion*, and is the underpinning for the dynamic communication topologies introduced in the π -calculus. For example, in the term

$$\text{new}(n).(c!\langle n \rangle) \mid c?(x).x!\langle \rangle, \quad (2.1.4)$$

we have a channel n scoped to the left hand process which is sending n over c . The right hand process then receives n over c (referred to by x) and then sends an empty signal over n . At the time of its creation, n ’s scope is just the left half of the term. However, after n is received in the right hand process it will be able to be referred to

outside of its initial scope. We will give a precise account of how this happens in our reduction rules and [Example 2.3.2](#) below.

We will sometimes abbreviate terms that use multiple channel restrictions by writing $\text{new}(n, m).R$ to denote the term $\text{new}(n).(\text{new}(m).R)$.

Simple conditional execution based on value equality comparison is available through the use of $\text{if } v_1 = v_2 \text{ then } R_1 \text{ else } R_2$. For example, in the following term, the value received on c is checked; if it matches a then a handshake is sent along a (which is referred to by x), otherwise the process terminates.

$$c?(x).(\text{if } x = a \text{ then } x!\langle \rangle \text{ else } \text{stop}) \quad (2.1.5)$$

Recursion is built into the language using the syntax $\text{rec } p.R$. The process $\text{rec } p.R$ itself is referred to by the variable p , which is used somewhere in R to express a recursive call. For example, consider the recursive responder term below, which receives a channel x_1 via c . It then sends a handshake response on x_1 , while another responder process is run in parallel.

$$\text{rec } p.c?(x_1).(x_1!\langle \rangle \mid p) \quad (2.1.6)$$

The variable p 's scope is restricted R , just as X is restricted to R in $c?(X).R$ and n is restricted to R in $\text{new}(n).R$.

We call a collection of parallel processes communicating over shared channels a *system*. Note that a system is itself a process. Our choice to define it is somewhat auxiliary to the π -calculus itself, but it is helpful to understanding the way that behavior can be modeled using processes as atoms of a system.

Example 2.1.7 Many presentations (including our own in the next chapter) of the π -calculus involve a choice or summation operator as in $P+Q$ for two processes terms P and Q . The meaning is essentially that either P or Q can be non-deterministically executed, and the other process will not be. However, we can model the same behavior without defining a choice operator:

$$c!\langle \rangle \mid c?().P \mid c?().Q \quad (2.1.8)$$

In the above process, either Q or P (but not both) could be executed. This is due to the asynchronous behavior of our language – sending an empty signal along c , we cannot control which process consumes the signal (or even if it will be consumed at all). Thus, even without the choice operator our calculus is non-deterministic. ■

Example 2.1.9 Perhaps we are not happy with this asynchronous transmission behavior. Surely we'd like to have blocking sends sometimes, or be able to guarantee that a value is received. Our asynchronous calculus can model synchronous sending by using a private channel that acknowledges when a value is received. To see how, consider the following system:

$$F_1(c) \Leftarrow \text{rec } z.(\text{new}(ack).(c!\langle ack \rangle \mid ack?().(R \mid z))) \quad (2.1.10)$$

$$F_2(c) \Leftarrow \text{rec } q.(c?(ack).(ack!\langle \rangle \mid q)) \quad (2.1.11)$$

$$Sys_1 \Leftarrow \text{new}(d).(F_1\langle d \rangle \mid F_2\langle d \rangle) \quad (2.1.12)$$

Above, both F_1 and F_2 have (infinite) recursive behavior, and we can think of Sys_1 as a term that ‘kicks off’ both of them after creating a shared channel for them to communicate on.

In an iteration of F_1 , a new channel ack is created for acknowledgement. This channel is sent along c and then F_1 waits for input on ack before executing some term R and calling another iteration. F_2 receives ack along c and then uses ack to send an empty signal to F_1 that it has received input on c .

This is just a toy example: the only thing being communicated is the acknowledgement channel itself. We might imagine a more complex system where F_1 sends more input along c and waits to make sure F_2 receives it. Note that the channel ack is only used *once* – we want to ensure that the acknowledgement that F_1 receives is definitely for *that* instance of communication that it just initiated. This allows us to guarantee that F_2 has executed before F_1 continues with R . ■

2.2 Structural Equivalence

A natural question at this point is, given two π -calculus terms, how can we determine if they are equivalent? Intuitively, we want them to be equivalent if they *act* the same, but actually defining this equivalence relation can be a bit subtle. In exploring this issue, we will first look at identifier substitution, giving rules for when we can safely interchange identifiers without creating a different term. Following this, we will develop the notion of *contexts* and then use it to build an equivalence relation among processes.

2.2.1 Identifier Substitution and α -equivalence

As a first step in our notion of equivalence, we might assert that the way identifiers are named shouldn’t change how they act. However, this doesn’t mean we can start interchanging symbols with carefree abandon. In a component process, some terms might be important for how the process acts in a larger system. For example, if we changed the channel that a mobile phone uses to communicate with a tower, that phone certainly wouldn’t act the same – the tower would no longer know how to talk to it. On the other hand, we should be able to change any of the channels that the phone uses to communicate internally with itself without much issue.

The only identifiers we can safely change in a process without potentially affecting the way it behaves in a larger system are *bound identifiers*. Intuitively, bound identifiers are those which are introduced by some name-binding operator within the process term. There are three π -calculus operators that bind identifiers. First, a name n is bound in the process term R to a new channel by the restriction operator as in $\text{new}(n).R$. Second, each channel variable x_i in the pattern X is bound in R to some channel v_i from the sending process when matched in a receive expression $c?(X).R$. Finally, the recursive variable x is bound within R in the recursive expression $\text{rec } x.R$, bound particularly to the whole process itself. We denote the set of bound identifiers in a term R by $bi(R)$; all those which are not bound we call *free*,

bound

identifiers
↪ page 8

free identifiers

denoting them $fi(R)$. Similarly, we denote the set of bound and free channel names in a term R by $bn(R)$ and $fn(R)$, respectively. We call a term with no free identifiers *closed*.

closed terms

For example, in the term:

$$\text{rec } p.c?(x_1).(x_1!\langle \rangle \mid p), \quad (2.2.1)$$

p is a bound recursive variable, while x_1 is bound by the receive operator. The channel c is free. Now consider the term

$$c!\langle n \rangle \mid \text{new}(n).(\text{rec } p.c?(x_1).(x_1!\langle \rangle \mid p)) \quad (2.2.2)$$

Here x_1, p are bound as before. However, the use of n being sent on c is *not* bound, since it occurs outside the scope of the restriction operator. In fact, the following term (with the restriction operator removed) is equivalent (see [Example 2.2.9](#) for justification).

$$c!\langle n \rangle \mid \text{rec } p.c?(x_1).(x_1!\langle \rangle \mid p) \quad (2.2.3)$$

When a receive term like $c?(X).R$ is executed, we substitute the free variables \overline{X} occurring in R with the values \overline{V} that were received. We denote the term that results from such substitutions by $R[\overline{V}/\overline{X}]$. During the course of a substitution, we might inadvertently ‘capture’ a bound term. For example, suppose the system

$$P\langle a \rangle \mid a!\langle n \rangle$$

where $P(a)$ is given by

$$P(a) \Leftarrow a?(x).(\text{new}(n).(n!\langle \rangle \mid x!\langle \rangle)) \quad (2.2.4)$$

In running $a?(x)$ we would perform the substitution $\llbracket n/x \rrbracket$. But the received term n is not the same as the n occurring in $P(a)$ – it was a free channel sent by a the process $a!\langle n \rangle$ outside the scope restriction $\text{new}(n)$. Thus, the problem in performing $\llbracket n/x \rrbracket$ is that it would have the free name n from the outside process bound as if it where the same n bound by $P(a)$. We say that performing this substitution would *capture* the bound name n . We can avoid this by first replacing the bound n with a new name that is ‘fresh’ – that is it does not occur elsewhere in the term. For example:

capture

$$P'(a) \Leftarrow a?(x).(\text{new}(n').(n'!\langle \rangle \mid c!\langle \rangle)) \quad (2.2.5)$$

We can now safely perform the receive and the corresponding substitution, yielding

$$\text{new}(n').(n'!\langle \rangle \mid n!\langle \rangle) \quad (2.2.6)$$

Obviously we want to say $P(a)$ and $P'(a)$ are equivalent. In general when two terms are the same up to their choice of bound identifiers, we say they are α -equivalent, and write $P(a) \equiv_\alpha P'(a)$. Though this can be treated more explicitly, from now on when we perform a substitution $R[\overline{V}/\overline{X}]$, we will implicitly pick a term α -equivalent

α -equivalency

to R where the substitution will not capture terms bound in R . From now on we will intend that a term represents its entire α -equivalency class, and thus will not explicitly specify α -equivalency in the equivalence relation introduced below.

Notice the use of interfaces to define the process $P(a)$ in (2.2.4). When a process has free channel names occurring in its body, as is the case with a , we will sometimes place those names inside parentheses after the process to suggest a process' interface. We say that a process Q with interface $Q(\bar{V})$ *exposes* the names \bar{V} . The idea is that since these terms are free, when the interface is used as a component in a larger system, we can have other components that expose the same channels. That way, our system can bind those channels at the top level and its components can communicate on them. For example, consider the following system:

exposes

$$\text{new}(b, c).Q_1\langle b \rangle \mid Q_2\langle b, c \rangle$$

Here we are assuming the existence of some process Q_1 exposing b and some process Q_2 exposing b and c . Both process components Q_1 , Q_2 both expose a common name b , which the system has bound. When some larger system uses *new* to bind channels that are exposed by a component interface we say that system *instantiates* the interface. Since usage of b in the processes is free, b is not captured when it is bound by the system. Instead, both processes have the bound term in common, and can use it to interact.

instantiate

2.2.2 Contexts and Equivalence

Perhaps the next idea we might have for building our equivalence relation is that equivalent processes should act the same when dropped into any larger system. Let us define more precisely what we mean by 'dropping in' a process.

Definition 2.2.7 (Context) A context \mathbb{C} is given by:

$$\mathbb{C} := \begin{cases} [] & \\ \mathbb{C} \mid Q \text{ or } Q \mid \mathbb{C} & \text{for any process } Q, \text{ context } \mathbb{C} \\ \text{new}(n).\mathbb{C} & \text{for any name } n, \text{ context } \mathbb{C}. \end{cases}$$

$\mathbb{C}[Q]$ denotes the result of replacing the placeholder $[]$ in the context \mathbb{C} with the process term Q .

Notice that with contexts, we do not pay any attention to whether a name in Q is bound in \mathbb{C} . Hence, unlike with substitution, free variables in Q can become bound in $\mathbb{C}[Q]$. So, for example, channel c in the process $P(c) \leftarrow c?().R$ can become bound in $\mathbb{C}[P(c)]$ where $\mathbb{C}[]$ is the context

$$\text{new}(c).c!\langle \rangle \mid []$$

We say that a relation \sim between processes is *contextual* if $P \sim Q$ implies $\mathbb{C}[P] \sim \mathbb{C}[Q]$ for any context \mathbb{C} . We are now ready to define our notion of equivalency using contexts.

contextual

Definition 2.2.8 (Structural Equivalence) Structural Equivalence, denoted \equiv is the smallest contextual equivalence relation that satisfies the following axioms:

$$\begin{array}{ll}
P \mid Q \equiv Q \mid P & \text{(S-COMP-COMM)} \\
(P \mid Q) \mid R \equiv P \mid (Q \mid R) & \text{(S-COMP-ASSOC)} \\
P \mid \text{stop} \equiv P & \text{(S-COMP-ID)} \\
\text{new}(c).\text{stop} \equiv \text{stop} & \text{(S-REST-ID)} \\
\text{new}(c).\text{new}(d).P \equiv \text{new}(d).\text{new}(c).P & \text{(S-REST-COMM)} \\
\text{new}(c).(P \mid Q) \equiv P \mid \text{new}(c).Q, \text{ if } c \notin \text{fi}(P) & \text{(S-REST-COMP)}
\end{array}$$

These axioms are simply a set of syntactic rules we use to identify as the same processes that are syntactically different. The first and second state that composition is commutative and associate. Thus, we will omit parentheses around compositions when our meaning is clear. (S-COMP-ID) states that a terminated process can be eliminated from a composition. (S-REST-ID) states that a channel scope restriction operator can be eliminated when its scope is only over a terminated process. (S-REST-COMP) states that scope ordering does not matter, justifying our shorthand $\text{new}(c, d).P$. The last of these axioms is most important – it is the basis for *scope extrusion*, upon which process mobility is based (as we shall demonstrate in [Example 2.3.2](#) below).

scope extrusion
 ↪ page 9
 mobility
 ↪ page 3

Example 2.2.9 In our discussion of bound identifiers above, we asserted that we can eliminate a scope restriction operation when none of the scoped identifiers occur in its scope. We can now show why this is permissible:

$$\begin{array}{ll}
\text{new}(n, m).(a?(x_1, x_2).x_1!\langle \rangle) \mid \text{rec } x.(a!\langle n, m \rangle \mid x) & \\
\equiv \text{new}(n, m).(a?(x_1, x_2).x_1!\langle \rangle \mid \text{stop}) \mid \text{rec } x.(a!\langle n, m \rangle \mid x) & \text{(S-COMP-ID)} \\
\equiv a?(x_1, x_2).x_1!\langle \rangle \mid (\text{new}(n, m).\text{stop}) \mid \text{rec } x.(a!\langle n, m \rangle \mid x) & \text{(S-REST-COMP)} \\
\equiv a?(x_1, x_2).x_1!\langle \rangle \mid \text{stop} \mid \text{rec } x.(a!\langle n, m \rangle \mid x) & \text{(S-REST-ID)} \\
\equiv a?(x_1, x_2).x_1!\langle \rangle \mid \text{rec } x.(a!\langle n, m \rangle \mid x) & \text{(S-COMP-ID)}
\end{array}$$

■

2.3 Reduction Semantics

We are now ready to give the *semantic* properties that a process in our language should possess. By specifying the behavior of processes, we define how computation proceeds in the π -calculus. The set of rules given below show how a process can internally evolve through a number of computation steps.

TODO:
 make all index
 terms lowercase

Definition 2.3.1 (Reduction) The *reduction relation* \longrightarrow is the smallest contextual relation that satisfies the following rules:

$$\begin{array}{ll}
c!\langle \bar{V} \rangle \mid c?(\bar{X}).R & \longrightarrow R[\bar{V}/\bar{X}] & \text{(R-COMM)} \\
\text{rec } p.R & \longrightarrow R[\text{rec } p.R/p] & \text{(R-REP)} \\
\text{if } v = v \text{ then } P \text{ else } Q & \longrightarrow P & \text{(R-EQ)} \\
\text{if } v_1 = v_2 \text{ then } P \text{ else } Q & \longrightarrow Q \quad (\text{where } v_1 \neq v_2) & \text{(R-NEQ)} \\
\frac{P \equiv P', P \longrightarrow Q, Q \equiv Q'}{P' \longrightarrow Q'} & & \text{(R-STRUC)}
\end{array}$$

We use the notation $P \cdots \longrightarrow Q$ when an arbitrary number of these rules have been applied in reducing P to Q .

The first of these allows a computation step for the transmission of values over a channel. Note that we only allow the application of (R-COMM) when the substitution $[\bar{V}/\bar{X}]$ makes sense. That is, \bar{V} and \bar{X} must have the same arity and in a typed system we'd want to ensure that their types were compatible¹. (R-EQ) enables a computational step for value-matching. For example, in

arity
↪ page 9

$$c!\langle a \rangle \mid c?(x).\text{if } x = a \text{ then } P \text{ else } \text{stop}$$

we apply (R-COMM) to obtain

$$\text{if } a = a \text{ then } P \text{ else } \text{stop}$$

from which we can apply (R-EQ) to obtain P . (R-REP) allows us to unravel a recursive expression so that it contains replicas of itself. For example,

$$\text{rec } p.c!\langle \rangle \mid p$$

expands to

$$c!\langle \rangle \mid \text{rec } p.c!\langle \rangle \mid p$$

Finally, (R-STRUCT) says that a reduction is defined up to structural equivalence. We give an example of its use below.

Example 2.3.2 We will give a demonstration of how scope extrusion is obtained using the rules and axioms of reduction and structural equivalence. Consider the expression

scope extrusion
↪ page 9

$$d?(x).x!\langle \rangle \mid \text{new}(c).(d!\langle c \rangle \mid c?().\text{stop}) \quad (2.3.3)$$

You can see above that c 's scope can be extruded by sending over d and that the left side of the term will then use c to communicate with the right side. Now we will show that this is enabled by the reduction rules. First, we can use (S-REST-COMP) to bring the restriction to the outside, giving:

$$\text{new}(c).(d?(x).x!\langle \rangle \mid d!\langle c \rangle \mid c?().\text{stop}) \quad (2.3.4)$$

¹See [Hen07] for a discussion of type systems for the π -calculus.

Since (2.3.3) is equivalent to (2.3.2), we can apply (R-STRUCT) to deduce that it reduces to some Q , then (2.3.3) will. To find this Q , we can apply (R-COMM), which we can do inside of the restriction operator thanks to the reduction relation's contextuality, and apply a substitution to (2.3.2), resulting in:

$$\text{new}(c).(c!\langle \rangle \mid c?().\text{stop}) \quad (2.3.5)$$

Finally, we can apply (R-COMM) again, so the process simply reduces to *stop*.

Now let $P(d)$ be the right half of our original process, and \mathbb{C} be the remaining context:

$$P(d) \Leftarrow \text{new}(c).(d!\langle c \rangle \mid c?().\text{stop}) \quad (2.3.6)$$

$$\mathbb{C} = d?(x).x!\langle \rangle \mid [] \quad (2.3.7)$$

Then we have shown that if we drop the component $P(d)$ into the context \mathbb{C} (forming $\mathbb{C}[P(d)]$), it will establish a new channel c and extend its scope, using d . This means that components that are ‘dropped in’ to a larger system can create new channels on the fly and then extrude them to communicate with the rest of the system (provided they share at least one channel to begin with). In fact, this is the very procedure that allows a system to change its communication topology dynamically via scope extrusion. ■

2.4 Action Semantics

Our description of process behaviors so far has been limited to talking about the internal computational steps through which it might evolve. Now, we want to give a more general description of how a process might evolve when placed within the context of a larger system. A process can interact with other processes within such a system by sending or receiving values along channels they share. To describe these abilities, we will use the notion of a *labelled transition system*, or *lts*.

Definition 2.4.1 (Labelled Transition System) A *labelled transition system* \mathcal{L} is a tuple $(\mathcal{S}, \mathcal{A})$ where \mathcal{S} is a set of processes and \mathcal{A} is a set of labels called *actions*. Furthermore, for each action α , there is a binary relation:

$$R_\alpha \subseteq \mathcal{S} \times \mathcal{S}$$

To denote that $\langle P, Q \rangle \in R_\alpha$, we will use the notation $P \xrightarrow{\alpha} Q$.

Hence, the transition $P \xrightarrow{\alpha} Q$ indicates that there is an action under which the process P becomes Q . We will refer to Q as the *residual* of P after α .

There are three types of actions that may cause a process to evolve. First, the process might receive a value. That is, a process P is said to be capable of making the transition $P \xrightarrow{c?\bar{X}} Q$, which is to say that P can receive \bar{X} along c to become the

residual

residual process Q . The capability of a process to evolve in this way is given by the rule (A-IN) in Figure 2.4.2, which says that for a general process c and input \bar{V}

$$c?(X).R \xrightarrow{c?\bar{V}} R[\bar{V}/X]$$

As with (R-COMM), evolution under (A-IN) is only possible when the substitution $[\bar{V}/X]$ makes sense. For example, a process $c!\langle\bar{V}\rangle \mid P$ will evolve to $stop \mid P \equiv P$ when it exercises its capability for output on c .

The second type of action available is sending. Here we need to be a bit more careful. In the case of receiving, the received names are always bound to new names in \bar{X} – so we needn't worry about issues of scope. In sending, however, we might be transmitting either free or bound names, or a mix of them. In the latter case, we need to take account of the fact that the scope of the name is being extruded to whatever process receives the name. We denote the set of names that are bound in the send action by (\bar{B}) , and we say that this set of names is *exported* by the process. Hence, the transition $c!\langle\bar{V}\rangle \xrightarrow{(\bar{B})c!\bar{V}} stop$ expresses the capability to send the values \bar{V} over c , exporting (\bar{B}) and resulting in $stop$. For example,

scope extrusion
↪ page 9

bound
↪ page 11

exported

$$new(d).(c!\langle d \rangle \mid Q) \xrightarrow{(d)c!d} Q$$

The capability of a process to evolve by sending a value is described by (A-OUT) for a general channel c and output values \bar{V} :

$$c!\langle\bar{V}\rangle \xrightarrow{c!\bar{V}} stop$$

We will refer to sending and receiving as *external actions*.

external action

Our third action we call *internal action*. This is caused by some internal evolution in P like those described by (R-COMM) in our Section 2.3. We call actions like sending and receiving external since in order to occur, they need some external process (given in some system of which the process in question is a part) to do the corresponding receiving or sending. However, with internal action there is no external process needed to proceed. We use τ denote such an internal evolution step. Thus, we say $P \xrightarrow{\tau} Q$ if P is able evolve into Q by performing a reduction step without any external contributions. For example (thanks to (R-COMM)),

internal action

$$c!\langle a \rangle \mid c?(x).x!\langle \rangle \xrightarrow{\tau} a!\langle \rangle$$

The capability for τ is defined through the rules (A-COMM), (A-REP), (A-EQ) and (A-NEQ). (A-REP), (A-EQ) and (A-NEQ) simply provide the same interval evolution capabilities as (R-REP), (R-EQ) and (R-NEQ) do in the [reduction semantics](#). (A-COMM), however, is more subtle than (R-COMM). We describe it below, after a discussion of some of the other rules in action semantics.

We define the action relation under the following rules (with their preconditions listed alongside them):

TODO:
make the arrow for
evolution size ac-
cording to the text
above it

Definition 2.4.2 (Action) The *action relation* \longrightarrow is the smallest relation between processes that satisfy the following rules:

$$\begin{array}{ll}
c?(X).R & \xrightarrow{c?\bar{V}} R[V/X] & \text{(A-IN)} \\
c!\langle\bar{V}\rangle & \xrightarrow{c!\bar{V}} \text{stop} & \text{(A-OUT)} \\
\text{rec } x.R & \xrightarrow{\tau} R[\text{rec } x.R/x] & \text{(A-REP)} \\
\text{if } v = v \text{ then } P \text{ else } Q & \xrightarrow{\tau} P & \text{(A-EQ)} \\
\text{if } v_1 = v_2 \text{ then } P \text{ else } Q & \xrightarrow{\tau} Q & v_1 \neq v_2 \quad \text{(A-NEQ)} \\
\frac{P \xrightarrow{\alpha} P'}{P \mid Q \xrightarrow{\alpha} P' \mid Q} & & \text{bn}(\alpha) \cap \text{fn}(Q) = \emptyset \quad \text{(A-COMP)} \\
\frac{P \xrightarrow{\alpha} P'}{\text{new}(b).P \xrightarrow{\alpha} \text{new}(b).P'} & & b \notin n(\alpha) \quad \text{(A-REST)} \\
\frac{P \xrightarrow{(\bar{B})c!\bar{V}} P'}{\text{new}(n).P \xrightarrow{(n,\bar{B})c!\bar{V}} P'} & & n \neq c, n \in \bar{V} \quad \text{(A-OPEN)} \\
\frac{P \xrightarrow{c?\bar{X}} P', Q \xrightarrow{(\bar{B})c!\bar{V}} Q'}{P \mid Q \xrightarrow{\tau} \text{new}(\bar{B}).(P' \mid Q')} & & (\bar{B}) \cap \text{fn}(P) = \emptyset \quad \text{(A-COMM)}
\end{array}$$

Jim:
I wonder if these couldn't be simplified (ie removing A-EQ, A-REP, etc.) by allowing a transition that happens over the reduction semantics? my sense is this approach is avoided because the action relation isn't actually contextual in our above definition (since we need to be more careful about bound variable captures). i wonder if there is a way to gracefully sidestep the issue and avoid all the redundancy...

contextual
↪ page 13

Together, (A-COMP) and (A-REST) provide a capability similar to contextually. That is, given that $P \xrightarrow{\alpha} P'$, (A-COMP) allows us to ‘drop in’ P alongside a process Q running in parallel, forming $P \mid Q \xrightarrow{\alpha} P' \mid Q$. Similarly, (A-REST) allows us to drop P into a new scope restriction operator, forming $\text{new}(b).P \xrightarrow{\alpha} \text{new}(b).P'$. They key difference between these rules and contextually is that here we need to be careful about inadvertently capturing bound variables. The action α could export names, so we need to make sure those names don't conflict with names in the process we are trying to infer.

Thus, in (A-REST) we require that the newly bound variable b does not occur in the names $n(\alpha)$ of the action α . Suppose we ignored this precondition and tried the following:

$$\frac{c?().\text{stop} \xrightarrow{c?} \text{stop}}{\text{new}(c).c?().\text{stop} \xrightarrow{c?} \text{new}(c).\text{stop}} \quad \text{(A-REST')}$$

This is not what we want. We should not allow $\text{new}(c).c?().\text{stop}$ to evolve since the scope of c cannot be extruded and thus no other process could ever send along $c!$. Similarly, we should not allow the introduced restriction to have the same channel name as any of the values transmitted in α . We wouldn't want to end up,

for example, with an action relation like

$$\text{new}(b).c!\langle b \rangle \xrightarrow{c!b} \text{new}(b).\text{stop}$$

since this would imply that b 's scope hasn't been extruded when it fact it has.

In (A-COMP), we need to ensure that none of the bound names of α conflict with the free variables in Q . There are no names (only variables) in a receive expression. The only names that are bound in an action are those of the set (\overline{B}) exported by a send action. Thus, the precondition on (A-COMP) simply requires that bound names that are transmitted will be 'fresh' in the composed process Q . For example, consider the following system:

$$\frac{\text{new}(b).c!\langle b \rangle \xrightarrow{(b)c!x} \text{stop}}{\text{new}(b).c!\langle b \rangle \mid b!\langle a \rangle \xrightarrow{(b)c!x} \text{stop} \mid b!\langle a \rangle} \quad (\text{A-COMP})$$

Above, we have a process sending on b but the scope of b has *not* been extruded (it hasn't been received on c). We don't want to allow b 's scope to be 'accidentally' extruded simply by capturing a free b somewhere in Q . Hence, we need to be careful not to 'capture' a channel like b by allowing exported channels to have the same name as free variables outside the original scope of the process.

(A-OPEN) expresses scope extrusion of a name n . Essentially, if we already know that

$$P \xrightarrow{(\overline{B})c!\overline{V}} P'$$

then we can take a free name $n \in fn(\overline{V})$ and bind it, inferring

$$\text{new}(n).P \xrightarrow{(\overline{n,B})c!\overline{V}} P'$$

The name n is then exported as well. Note that n cannot be c since restricting n (i.e. c) to P would cause a scoping issue that interfered with an outside process' ability to receive on c .

Finally we have (A-COMM), which expresses scope extrusion as well but this time in the context of the internal action that we described with (R-COMM) in the reduction semantics. Suppose we have that $P \xrightarrow{c?\overline{X}} P'$ and $Q \xrightarrow{(\overline{B})c!\overline{V}} Q'$. Then according to (A-COMM), if we compose the two, forming $P \mid Q$, then the simultaneous (compositionally) occurrence of an input action $c?\overline{X}$ and matching output action $(\overline{B})c!\overline{V}$ can be replaced with τ . That is, we can say:

$$P \mid Q \xrightarrow{\tau} \text{new}(\overline{B}).(P' \mid Q'),$$

Note that the exported names (\overline{B}) are now scoped to both processes as a result of the original term Q exporting them. Just as in (A-COMP), we need to make sure that none of these exported names are going to capture free terms in P . Hence, we require that $(\overline{B}) \cap fn(P) = \emptyset$.

Example 2.4.3 In Example 2.1.9, we defined a simple process for modeling (recursive) synchronous sends:

$$F_1(c) \Leftarrow \text{rec } z.(\text{new}(ack).(c!\langle ack \rangle \mid ack?().(R \mid z)))$$

We then went on to show how this process might work as a component in a example system. But suppose we wanted to characterize this process' behavior in general. We could use reduction semantics to described how it it can evolve internally (in this case there isn't much interesting we can do except unwind the recursion), but we'd also want to include a description of how that process behaves externally. If possible, we'd like to do this without having to come up with a system in which to place the process. We don't want our characterization of the process to rely on some auxiliary system. Without defining a particular system for it to work in, we can use action semantics to provide a characterization of how $F_1(c)$ behaves externally. Consider the following inferences:

$$\begin{array}{lll} F_1(c) & \xrightarrow{\tau} & \text{new}(ack).(c!\langle ack \rangle \mid ack?().(R \mid F_1\langle c \rangle)) & (\text{A-REP}) \\ & \xrightarrow{(ack)c!ack} & \text{stop} \mid ack?().(R \mid F_1\langle c \rangle) & (\text{A-OPEN, A-OUT}) \\ & \xrightarrow{(ack?)} & \text{stop} \mid (R \mid F_1\langle c \rangle) & (\text{A-IN}) \end{array}$$

Using the [structural equivalence](#) rule (S-COMP-ID), we know the final step of this inference to be equivalent to:

$$R \mid F_1(c)$$

Above, we have shown presence of the important behaviors we expect in $F_1(c)$. That is, we have shown that $F(c)$ can:

- Recursively spawn a process that can...
- Send ack over c , extruding its scope and resulting in a residual process that can...
- Receive the acknowledgement handshake on ack , resulting in a residual that can...
- Run R and wait for the next recursive iteration to occur (internally).

Thus, we have completely characterized $F_1(c)$'s capabilities to act as a recursive synchronous output process in a system — and we have done so without having to say anything about what that system actually looks like. ■

2.5 Extended Example: Memory Cells

We said in Chapter 1 that distributed systems usually involve information that is shared between processes executing independently on multiple machines. In the π -calculus, the principle means of sharing information is via message passing. Suppose, that we wanted instead to model a memory cell that stores information in a less

fleeting way. Our cell might have channels for getting and setting its value, and multiple processes could use the cell's getter channel without the value disappearing. It turns out that we can create this cell just using message passing. This section will explore the creation and use of a memory cell, which serves as a good review and usage example of the concepts introduced in this chapter.

The problem that we have to work around is that receiving a identifier from a channel removes that value from the channel. It cannot be retrieved again by some other process. Thus, we need a way to push it back in for the next time. Consider the following system:

$$\begin{aligned} \text{Cell}(\text{get}, \text{set}) \Leftarrow & \text{new}(c).(c!\langle \text{init} \rangle \\ & | \text{rec } g.(\text{get}?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \mid g)) \\ & | \text{rec } s.(\text{set}?(x, b).c?(y).(x!\langle b \rangle \mid c!\langle b \rangle \mid s))) \end{aligned} \quad (2.5.1)$$

In *Cell*, we first create a new channel c that will be used to 'store' the value. We then initialize c with the value *init*. The following line has a recursive listener process that, when given a channel x via *get*, gets the value from c and sends it back via x . In parallel, it sends the value back into c so it can be had again. The next line is similar except that two values are supplied via *set* – a new value b and a channel x . The old value is pulled from c and simply discarded (i.e. not used). The new value b is pushed to c this time. It is also sent via x as an acknowledgment that the cell's new value has been set.

Now let us look at how this memory cell might be used. In the following system we assume that we have access to the integers and standard arithmetic operations². The memory cells are initialized with the integer 0. We also give an exposed 'output' channel o .

$$\begin{aligned} \text{MemoryClient}(\text{get}_1, \text{set}_1, o) \Leftarrow & (\text{new}(a).(\text{get}_1!\langle a \rangle \\ & | \text{new}(a_2).(a?(y).\text{set}_1!\langle y + 1, a_2 \rangle \mid a_2?(z).o!\langle z \rangle)) \end{aligned} \quad (2.5.2)$$

The system gets the current value from the channel get_1 and then uses that value to send an incremented value to set_1 , receiving acknowledgement on channel a_2 . The value received on a_2 is sent to the output channel. Notice that we created new channels for acknowledgement but left the cell's channels free and exposed. Thus, the two components might be put together in the following system (which leaves the output channel free):

$$\text{new}(\text{get}_1, \text{set}_1).(\text{Cell}(\text{get}_1, \text{set}_1) \mid \text{MemoryClient}(\text{get}_1, \text{set}_1, o))$$

To see why this system produces the behavior we expect, we substitute the definitions for *Cell* and *MemoryClient* into the system and observe scope restrictors for a and

²See [?, miln99] for an example of how the integers and arithmetic operations can be built from π -calculus primitives.

a_2 can be moved out using ($S - REST - COMP$):

$$\begin{aligned}
& \text{new}(get_1, set_1, a, a_2).(\text{new}(c).(c!\langle init \rangle \\
& \quad | \text{rec } g.(get?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \mid g)) \\
& \quad | \text{rec } s.(set?(x, b).c?(y).(x!\langle b \rangle \mid c!\langle b \rangle \mid s))) \\
& \quad | get_1!\langle a \rangle \\
& \quad | a?(y).set_1!\langle y + 1, a_2 \rangle \mid a_2?(z).o!\langle z \rangle)
\end{aligned} \tag{2.5.3}$$

To get at the get_1 receive in the memory cell, we need to first apply (R-REP):

$$\begin{aligned}
& \text{new}(get_1, set_1, a, a_2).(\text{new}(c).(c!\langle init \rangle \\
& \quad | get?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \\
& \quad | \text{rec } g.(get?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \mid g)) \\
& \quad | \text{rec } s.(set?(x, b).c?(y).(x!\langle b \rangle \mid c!\langle b \rangle \mid s))) \\
& \quad | get_1!\langle a \rangle \\
& \quad | a?(y).set_1!\langle y + 1, a_2 \rangle \mid a_2?(z).o!\langle z \rangle)
\end{aligned} \tag{2.5.4}$$

Now we can apply (R-COMM) to the memory cell's getter, performing the substitution $\llbracket a/x \rrbracket$ to the term $c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \dots$

$$\begin{aligned}
& \text{new}(get_1, set_1, a, a_2).(\text{new}(c).(c!\langle init \rangle \\
& \quad | c?(y).(a!\langle y \rangle \mid c!\langle y \rangle \\
& \quad | \text{rec } g.(get?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \mid g)) \\
& \quad | \text{rec } s.(set?(x, b).c?(y).(x!\langle b \rangle \mid c!\langle b \rangle \mid s))) \\
& \quad | a?(y).set_1!\langle y + 1, a_2 \rangle \mid a_2?(z).o!\langle z \rangle)
\end{aligned} \tag{2.5.5}$$

...and apply it once again to the memory's 'internal' channel c , stripping out the initializer and substituting in the value $init$:

$$\begin{aligned}
& \text{new}(get_1, set_1, a, a_2).(\text{new}(c).(\\
& \quad | a!\langle init \rangle \mid c!\langle init \rangle \\
& \quad | \text{rec } g.(get?(x).c?(y).(x!\langle y \rangle \mid c!\langle y \rangle \mid g)) \\
& \quad | \text{rec } s.(set?(x, b).c?(y).(x!\langle b \rangle \mid c!\langle b \rangle \mid s))) \\
& \quad | a?(y).set_1!\langle y + 1, a_2 \rangle \mid a_2?(z).o!\langle z \rangle)
\end{aligned} \tag{2.5.6}$$

Which, with one more (R-COMM), finally sends back the $init$ value to the *MemoryClient* on a . It should now be quite painfully obvious why action semantics would be a better way to analyze the behavior of our memory cell. But there is another problem. Consider the following modification to our system:

$$\begin{aligned}
& \text{new}(get_1, set_1).(Cell\langle get_1, set_1 \rangle \\
& \quad | MemoryClient_1\langle get_1, set_1, o \rangle \\
& \quad | MemoryClient_2\langle get_1, set_1, o \rangle)
\end{aligned} \tag{2.5.7}$$

race condition

If we were run these as such, we may find that the output channel was producing some unexpected results. This is due to a classic issue in concurrent systems, a *race condition*, which means that the output of a system is dependent on the timing of computations in the system. For example, consider what happens if *MemoryClient*₁ gets the value 0 of the cell first, but before it can set it *MemoryClient*₂ steps in, receives the 0 again and then sets the cell to 1. In that case, *MemoryClient*₁ will have a value for the cell (0) that is no longer current. It will then set the value of the cell to 1 again, where we would expect it to set 2 since the two clients each incremented once.

The usual solution to this type of problem is by implementing a *lock*. A lock ensures that only one client at a time is doing critical operations like incrementing a value. The client asks for a lock, and when it gets it it proceeds with its critical operations before giving up the lock. If no lock is available, the client has to wait until one frees. Asynchronous channels map naturally to this type of behavior, as we will see in our *MemoryClient*, which we can modify to use a lock.

lock

We use the short hand $l?lock.P$ to mean:

$$\text{rec } q.(l?(x).\text{if } x = \text{true} \text{ then } (P \mid l!\langle \text{false} \rangle) \text{ else } (q \mid l!\langle \text{false} \rangle))$$

Above we check the lock channel l and execute P if it is currently set to *true* (meaning the lock is still available). Otherwise we recursively try to get the lock again. Notice that whether the lock is already set to *false* or we are able to acquire it, we need to send *false* to l so that another process can't acquire the lock.

Let's use action semantics to make sure locking behaves as expected. We first note using (A-REP) that the above can internally evolve over τ to

$$\begin{aligned} & \xrightarrow{\tau} l?(x).\text{if } x = \text{true} \text{ then } (P \mid l!\langle \text{false} \rangle) \text{ else} \\ & \quad l?lock.P \mid l!\langle \text{false} \rangle) \end{aligned} \tag{2.5.8}$$

If $l?(x).$ receives a true, then

$$\begin{aligned} & \xrightarrow{c?true.} \text{if } \text{true} = \text{true} \text{ then } (P \mid l!\langle \text{false} \rangle) \text{ else} \\ & \quad l?lock.P \mid l!\langle \text{false} \rangle) \end{aligned} \tag{2.5.9}$$

We can now apply (A-EQ), yielding:

$$\xrightarrow{\tau} P \mid l!\langle \text{false} \rangle \tag{2.5.10}$$

As expected. Otherwise, if $l?(x).$ receives a *false*, then $l?lock.P$

$$\begin{aligned} & \xrightarrow{c?false.} \text{if } \text{false} = \text{true} \text{ then } (P \mid l!\langle \text{false} \rangle) \text{ else} \\ & \quad l?lock.P \mid l!\langle \text{false} \rangle) \end{aligned} \tag{2.5.11}$$

This time using (A-NEQ),

$$\xrightarrow{\tau} l?lock.P \mid l!\langle \text{false} \rangle) \tag{2.5.12}$$

Which again is what we would expect. Thus, we have verified that the lock works as expected.

Now, unlocking is done via the shorthand $l!unlock$, meaning

$$l?(x).l!\langle true \rangle$$

This term simply discards the current l value and sets it to *true*.

Our *MemoryClient* thus becomes:

$$\begin{aligned} LMemoryClient(get_1, set_1, o, l) \Leftarrow & (\text{new}(a).(l?lock.(get_1!\langle a \rangle \\ & | \text{new}(a_2).(a?(y).set_1!\langle y+1, a_2 \rangle \quad (2.5.13) \\ & | a_2?(z).(l!unlock \mid o!\langle z \rangle)))) \end{aligned}$$

Note that the lock l is exposed. It needs to be initialized to *true* by the system that defines it so that the first process trying to get the lock can get it. We will return to the subject of locks in Chapter 4, where they play a surprisingly similar role in the implementation of a synchronous π -calculus.

TODO:
line up all the
above equations
by putting them
in one array and
using breaks

3

The Synchronous π -Calculus

In [Section 2.1](#), we introduced a version of the π -calculus which we said was made *asynchronous* by its use of non-blocking send operations. Rather than allowing an operation to happen after a sent value has been received by some other process, a sending process simply ends. In [Example 2.1.9](#) we gave a straightforward method of simulating synchronous sending in the asynchronous π -calculus using acknowledgement channels. Also absent in our calculus was the non-deterministic choice operator, also known as the summation operator. We gave a method of simulating this in [Example 2.1.7](#).

We have already had a taste of the expressive power of the synchronous π -calculus in Chapter 1's mobile phone network example. In fact, the original calculus given by Milner, Parrow and Walker was synchronous and included the two operators – summation and synchronous sending – that we omitted in our asynchronous π -calculus.

Our original calculus featured synchronous receiving, but we now make sending synchronous as well, allowing a process to be performed after the output has been consumed by some other receiver. Hence, in the synchronous π -calculus, processes can be guarded by both receiving *and* sending.

If we have a group of guarded processes joined by the summation operator, only one of those will be processes will be ‘chosen’ (non-deterministically) to be executed. The rest will simply terminate without having any effect. The power of the synchronous π -calculus comes when we have another group of summed processes, running in parallel, something like:

guarded
↪ page 9

$$c!\langle \rangle.P_1 + d_1!\langle \rangle.P_2 + d_2?().P_3 \mid c?().R_1 + d_3!\langle \rangle.R_2$$

In the above isolated system, we actually *can* know which of the processes will be chosen to run, despite the non-deterministic nature of the choice operator. Because both sends and receives are guarded, the P_k 's and R_k 's above can only run when their respective transmission guards complete. Hence, only P_1 and R_1 will be allowed to run since sending on c is the only transmission with a ‘matching’ reception on the same channel. Now imagine a slightly different system:

$$c!\langle \rangle.P_1 + d!\langle \rangle.P_2 \mid c?().R_1 + d?().R_2$$

Here we have *two* transmissions with matches, on c and on d . Hence, we cannot make a guarantee about which processes are chosen. However, we *can* say that if P_1 executes on the left side, R_1 will be chosen on the right side. We can say the same for

P_2 and R_2 . There is a silent, implicit sort of communication that happens between groups of parallel processes when a non-deterministic choice is made among them. This is a powerful feature which comes with the special operators of the synchronous π -calculus.

Now that we have gotten an idea of the synchronous π -calculus' unique properties, we will turn in the next section to its formal syntax and rules of computation.

3.1 The Synchronous π -Calculus

<i>Action Prefixes</i>	
$\pi := n!\langle \bar{V} \rangle$	Send
$n?(\bar{X})$	Receive
<i>Process terms</i>	
$R := \sum_{i \in \{1, \dots, n\}} \pi_i.R_i$	Summation ($n \in \mathbb{Z}$)
$R_1 \mid R_2$	Composition
$\text{new}(n).R$	Restriction
$\text{if } v_1 = v_2 \text{ then } R_1 \text{ else } R_2$	Matching
$\text{rec } x.R$	Recursion
stop	Termination

Figure 3.1.1: Terms in the synchronous π -calculus

Note the important difference between Figure 2.1.1 and Figure 3.1.1. First, we have grouped sending and receiving together as *action prefixes*. These prefixes are made available to processes via the summation operator.

Consider the term:

$$\sum_{i \in \{1, \dots, n\}} \pi_i.R_i$$

The notation $\pi_i.R_i$ requires that the action π_i happen before the guarded process R_i can be executed. If R_a is executed in this way, then for all $j \in \{1, \dots, n\}, j \neq a$, the capabilities for both the action π_j and the execution of R_j are lost. In other words, the summation ensures that only one of n guarded processes will be executed, providing a branching behavior in the logic of a term. Which of these branches is picked depends on which action prefix capability is exercised first. As we saw above, we cannot always guarantee which of the action capabilities will be exercised, so we say that the summation operator is non-deterministic.

For the cases that $n = 1$ and $n = 2$, we will use the notation $\pi.R$ and $\pi_1.R_1 + \pi_2.R_2$, respectively. Notice that the $n = 1$ case is the equivalent of the process terms of

our asynchronous calculus. To accommodate for the new operator, we add to our congruence relation given in [Definition 2.2.8](#) that summation is commutative (S-SUM-COMM) and associative (S-SUM-ASSOC).

The summation case of $n = 0$ is what is meant by our *stop* termination process. It behaves just as it did in our asynchronous calculus. We also add to our congruence relation the following trivially true fact, which we call (S-SUM-ID)

$$R + 0 \equiv R$$

Note also that in our action prefixes, we have made sending a guarded operation, which means that in the term

$$n!\langle \bar{V} \rangle.R$$

R will not execute until some other process receives \bar{V} along n . Receiving is also guarded, as in the asynchronous version.

$R + Q \equiv Q + R$	(S-SUM-COMM)
$(P + Q) + R \equiv P + (Q + R)$	(S-SUM-ASSOC)
$R + 0 \equiv R$	(S-SUM-ID)
$P \mid Q \equiv Q \mid P$	(S-COMP-COMM)
$(P \mid Q) \mid R \equiv P \mid (Q \mid R)$	(S-COMP-ASSOC)
$P \mid \text{stop} \equiv P$	(S-COMP-ID)
$\text{new}(c).\text{stop} \equiv \text{stop}$	(S-REST-ID)
$\text{new}(c).\text{new}(d).P \equiv \text{new}(d).\text{new}(c).P$	(S-REST-COMM)
$\text{new}(c).(P \mid Q) \equiv P \mid \text{new}(c).Q, \text{ if } c \notin \text{fi}(P)$	(S-REST-COMP)

Figure 3.1.2: Structural equivalence axioms in the synchronous π -calculus

3.2 Computation in the Synchronous π -Calculus

We are now ready to give a description of the computation behavior. As we might expect, it does not differ hugely from computation in the asynchronous calculus. In the reduction rules, the only changes are to make room for the summation operator. Because only one process gets chosen from a group of summed processes, it is not enough to have two ‘matching’ send and receive action prefixes in a summation. Instead, we need one of each running in parallel. This behavior is described by (R-SYNC). It expresses the commutation step where the processes have transmitted their value. Hence, we perform the appropriate substitution to the receiving process, run the guarded processes and terminate all the other terms in the sum.

$c!\langle \bar{V} \rangle.P + Q \mid c?(\bar{X}).R + B \longrightarrow P \mid R[\bar{V}/\bar{X}]$	(R-SYNC)
$\text{rec } x.R \longrightarrow R[\text{rec } x.R/x]$	(R-REP)
$\text{if } v = v \text{ then } P \text{ else } Q \longrightarrow P$	(R-EQ)
$\text{if } v_1 = v_2 \text{ then } P \text{ else } Q \longrightarrow Q \quad (\text{where } v_1 \neq v_2)$	(R-NEQ)
$\frac{P \equiv P', P \longrightarrow Q, Q \equiv Q'}{P' \longrightarrow Q'}$	(R-STRUC)

Figure 3.2.1: Reduction rules for the synchronous π -calculus

Example 3.2.2 It is not hard to show that the synchronous π -calculus can model the asynchronous version. To see why, first note that asynchronous sending can be encoded simply by $n!\langle \bar{V} \rangle.\text{stop}$. This we will abbreviate with the familiar notation $n!\langle \bar{V} \rangle$. As we noted above, the summation notation allows for a single guarded process. If we limit ourselves to these single summations and limit all sending to be of the form $n!\langle \bar{V} \rangle.\text{stop}$, then we have the asynchronous π -calculus. To see why the reduction semantics are compatible, consider the following which shows that (R-COMM) of Definition 2.3.1 can be considered to be a special case of (R-SYNC):

$$\begin{aligned}
c!\langle \bar{V} \rangle.\text{stop} + \text{stop} \mid c?(\bar{X}).R + \text{stop} &\equiv c!\langle \bar{V} \rangle.\text{stop} \mid c?(\bar{X}).R, & (\text{S-SUM-ID}) \\
c!\langle \bar{V} \rangle.\text{stop} \mid c?(\bar{X}).R &\longrightarrow (\text{stop} \mid R)[\bar{V}/\bar{X}], & (\text{R-SYNC}) \\
(\text{stop} \mid R)[\bar{V}/\bar{X}] &\equiv R[\bar{V}/\bar{X}] & (\text{S-COMP-ID}) \\
c!\langle \bar{V} \rangle \mid c?(\bar{X}).R &\longrightarrow R[\bar{V}/\bar{X}] & (\text{R-STRUC})
\end{aligned}$$

It will be obvious from our presentation of synchronous action rules below that they needn't be shown to be a general version of the asynchronous rules – they are compatible simply by ignoring the extra rule and using our $n!\langle \bar{V} \rangle.\text{stop}$ encoding of sending. ■

Neither do the action rules for the synchronous π -calculus differ significantly from those in the asynchronous version. As we would expect, (A-OUT) has been modified to express synchronous sending. It now evolves over output to a process R and not simply to the termination process stop :

$$c!\langle \bar{V} \rangle.R \xrightarrow{c!\bar{V}} R$$

We have also added a new rule, (A-SUM), allows for the summation operator in a manner that is similar to the way (A-COMP) allows for the composition operator.

$$\sum_{i \in \{1, \dots, n\}} \frac{P_i \xrightarrow{\pi_i} P'_i}{\pi_i.P_i \xrightarrow{\pi_i} P'_i}$$

(A-SUM) expresses that if we know a process evolves on its own then we can infer that it will evolve in a summation. It says, for example, that if some process $\pi_1.P$ is able to evolve to P' over some action π_1 , then π_1 will also cause $\pi_1.P + \pi_2.Q$ to evolve,

over the same π_1 , to the choice of P' . Notice that unlike (A-COMP), (A-SUM) does not need to be careful about capturing names. Since there no other processes are run by the summation, we needn't worry about causing a naming issue when we possibly export terms by running the action α .

$c?(\overline{X}).R$	$\xrightarrow{c?\overline{V}}$	$R[\overline{V}/\overline{X}]$	(A-IN)
$c!\langle\overline{V}\rangle.R$	$\xrightarrow{c!\overline{V}}$	R	(A-OUT)
$\text{rec } x.R$	$\xrightarrow{\tau}$	$R[\text{rec } x.R/x]$	(A-REP)
$\text{if } v = v \text{ then } P \text{ else } Q$	$\xrightarrow{\tau}$	P	(A-EQ)
$\text{if } v_1 = v_2 \text{ then } P \text{ else } Q$	$\xrightarrow{\tau}$	Q	$v_1 \neq v_2$ (A-NEQ)
$\sum_{i \in \{1, \dots, n\}} \frac{P_i \xrightarrow{\pi_i} P'_i}{\pi_i.P_i \xrightarrow{\pi_i} P'_i}$			(A-SUM)
$\frac{P \xrightarrow{\pi} P'}{P \mid Q \xrightarrow{\alpha} P' \mid Q}$		$bn(\alpha) \cap fn(Q) = \emptyset$	(A-COMP)
$\frac{P \xrightarrow{\alpha} P'}{\text{new}(b).P \xrightarrow{\alpha} \text{new}(b).P'}$		$b \notin n(\alpha)$	(A-REST)
$\frac{P \xrightarrow{(\overline{B})c!\overline{V}} P'}{\text{new}(n).P \xrightarrow{(n, \overline{B})c!\overline{V}} P'}$		$n \neq c, n \in \overline{V}$	(A-OPEN)
$\frac{P \xrightarrow{c?\overline{X}} P', Q \xrightarrow{(\overline{B})c!\overline{V}} Q'}{P \mid Q \xrightarrow{\tau} \text{new}(\overline{B}).(P' \mid Q')}$		$(\overline{B}) \cap fn(P) = \emptyset$	(A-COMM)

Figure 3.2.3: Action rules for the synchronous π -calculus

3.3 Extended Example: Leader Elections

Leader elections, a classic problem in distributed systems, are a good example of the power of the synchronous π -calculus. Loosely, a leader election is a system where a group of processes, each with a unique identifier (via integers, perhaps), must agree on a ‘leader’ process identification in a finite amount of time. The processes vote on a process to be their leader by sending an integer-valued ‘vote’ v_i on a given output channel o . Ideally we want each of the processes to operate using the same ‘program’, without any preference or priority hard-coded into that program.

One means of identifying as ‘the same’ the program run by the processes is by the concept of *symmetry*. We say that two processes are symmetric if any they are equivalent under structural equivalence and a systematic renaming of their identifiers.

symmetry

To better understand what is meant by ‘a systematic renaming’, assume that each process, channel name, and vote has a unique identifier $i \in \{1, \dots, n\}$. Now suppose we have an isomorphism σ that maps these identifiers to other identifiers in the space $\{1, \dots, n\}$. we apply σ to a term according to the following recursive definition:

<i>Action Prefixes</i>	
$\sigma(c_i!v_i)$	$= c_{\sigma(i)}!v_{\sigma(i)}$
$\sigma(c_i?v_i)$	$= c_{\sigma(i)}?v_{\sigma(i)}$
<i>Processes</i>	
$\sigma(\sum_{i \in \{1, \dots, n\}} \pi_i.R_i)$	$= \sum_{i \in \{1, \dots, n\}} \sigma(\pi_i).\sigma(R_i)$
$\sigma(R_1 \mid R_2)$	$= \sigma(R_1) \mid \sigma(R_2)$
$\sigma(\text{new}(n).R)$	$= \text{new}(n).\sigma(R)$
$\sigma(\text{if } v_i = v_j \text{ then } R_1 \text{ else } R_2)$	$= \text{if } v_{\sigma(i)} = v_{\sigma(j)} \text{ then } \sigma(R_1) \text{ else } \sigma(R_2)$
$\sigma(\text{rec } x.R)$	$= \text{rec } x.\sigma(R)$
$\sigma(\text{stop})$	$= \text{stop}$

Figure 3.3.1: Rules for applying σ

Using these rules, we have a systematic function σ for renaming identifiers in a process. For example, consider the following system:

$$P_0 \mid P_1 \Leftarrow c_0!\langle \rangle.o!\langle 0 \rangle + c_1?().o!\langle 1 \rangle \mid c_1!\langle \rangle.o!\langle 1 \rangle + c_0?().o!\langle 0 \rangle \quad (3.3.2)$$

Here isomorphism σ operates in the space $\{0, 1\}$, mapping 1 to 0 and 0 to 1. Equivalently, it takes an identifier i to $i + 1 \bmod 2$. The output channel o is a special case, and so we extend σ to always map o to itself. Hence $P_0 = \sigma(P_1)$ and we say that P_0 is symmetric to P_1 .

Now that we have shown that (3.3.2) is a system of processes running ‘the same program’, we need to show that it actually solves the leader election. This is not hard to show. There are two possibilities: either P_0 notifies P_1 on c_0 first, or P_1 notifies P_0 on c_1 first. Applying the reduction rule (R-SYNC) to (3.3.2), the first possibility gives

$$o!\langle 0 \rangle \mid o!\langle 0 \rangle$$

Here we see that both processes will agree in their output. Note that no substitutions were necessary since $c!$ is simply a handshake signal.

If, on the other hand, P_1 notifies first, then again we apply (R-SYNC) to get

$$o!\langle 1 \rangle \mid o!\langle 1 \rangle$$

Again, a leader has been elected. Hence, we have given a term that successfully solves the leader election problem for symmetric processes in the special case of a two-process system. We will discuss more general leader elections in the next chapter.

4

Synchronicity and Distributed Systems

A natural question arises at this point: can we represent this expressive communication power using only our asynchronous π -calculus? That is, using the simulations given in Examples 2.1.9 and 2.1.7 (or perhaps some similar but more complicated approach) can we fully capture the ‘communication’ between non-deterministically chosen processes discussed above? We will explore the surprising complexity of this question and some of its implications in Section 4.1. First though, let us give a more formal discussion of the features of the synchronous π -calculus.

Given these results, it should come as no surprise that the implementation of synchronous calculi on distributed systems is a thorny issue. On the one hand, it is a useful construct that allows us to model many problems more naturally and easily. On the other, all communication in a distributed system is asynchronous in nature, and so any synchronous communication must be implemented as a layer on top of an asynchronous base. It can be quite difficult to construct synchronous communication efficiently without violating the requirements of a truly distributed system where there is no central control process. The issue becomes more difficult still with the Palamidessi’s related requirement of symmetry, which means that a process’s behavior does not depend on its location in the channel topology.

How can we reconcile this with Palamidessi’s result, which indicates that there are important problems that cannot be solved without the full generality of the synchronous calculus? Is such a calculus even implementable at any cost on distributed systems? We will see that relaxing any of Palamidessi’s assumptions enables a full encoding. Some of such encodings derive from the classic distributed solutions to the problem of synchronous communication but strain important assumptions about symmetry in ways that we may not be comfortable allowing. Palamidessi herself gives as important probabilistic encoding [PH01] which does not break symmetry.

Jim:
On second thought,
I think I might
want to leave the
reader with this
question, for now
— to peak their
curiosity, perhaps.

4.1 Separation Results

When trying to compare the expressive power of different calculi, one good approach is to, as above, provide explicit encodings from one language to another¹. We say

¹Note that Example 3.2.2 is a trivial example of such an encoding since our encodings are straightforward enough to be equivalent under the structural equivalence. Most encodings require the more advanced structure of *bisimulation* equivalences, which relies on setting up a notion of simulation and then proving that two processes simulate one another.

source language

target language

that we are trying to encode from *source language* into the terms of a *target language*, and if we succeed, we have shown that the target language is at least as expressive as the source. Hence, in example [Example 3.2.2](#) we showed that the synchronous calculus is at least as expressive as the asynchronous calculus by giving an encoding from the asynchronous to the synchronous. We will also use the notation

$$\llbracket P \rrbracket \stackrel{def}{=} Q$$

to mean that P in the source language is encoded by Q in the target language.

To prove a separation result between languages, it is enough to show that there are problems that are not solvable in the source language that are not solvable in the target language. In [\[Pal03\]](#), Palamidessi uses the solvability of the leader election problem on symmetric networks to show that the synchronous π -calculus is strictly more expressive than the asynchronous version. Loosely, the leader election problem is the problem of having group of identifier (via integers, perhaps) processes agree on a ‘leader’ process identification in a finite amount of time. We say that these processes are a symmetric network if any two processes P_i, P_j are equivalent under structural equivalence and renaming of their identifiers. For example, consider the following symmetric network:

$$P_0 \mid P_1 \Leftarrow c_0!\langle \rangle.o!\langle 0 \rangle + c_1?().o!\langle 1 \rangle \mid c_1!\langle \rangle.o!\langle 1 \rangle + c_0?().o!\langle 0 \rangle$$

It should not be hard to see that this solves the leader election problem in the synchronous π -calculus by agreeing on a leader via the output channel o . It may be less obvious, but it is not possible to solve the leader election problem in a symmetric network of asynchronous π -calculus processes. This is a direct result of the lack of the choice operator: without it, the symmetric processes have no way to pick a leader non-deterministically without potentially disagreeing with one another. It is only through the implicit communication underlying the choice operator that synchronous processes are able to break out of their symmetry and agree on a leader.

Using these results, Palamidessi gives a useful set of requirements that formally separate the two calculi.

The first of those requirement, which is on the encoding, is *uniformity*, which means that:

$$\llbracket \alpha(P) \rrbracket = \alpha(\llbracket P \rrbracket) \tag{4.1.1}$$

$$\llbracket P \mid Q \rrbracket = \llbracket P \rrbracket \mid \llbracket Q \rrbracket \tag{4.1.2}$$

Rule [\(4.1.1\)](#) simply states that an arbitrary α renaming function α is not violated in the process of the encoding. That is, if we α -rename a process P and then encode it we get the same result as if we encode it and then α -rename it. Rule [\(4.1.2\)](#) is related to the requirements of a distributed system. That is, parallel processes really should just map to parallel processes, with no top level ‘manager’ process or the like to aide the encoding. That is, we wouldn’t want to encode $P \mid Q$ to something like

$$P \mid \text{Manager} \mid Q$$

Jim:
give a brief
overview of the
argument as to
why?

uniformity

TODO:
When I try to
refer to the label
 α -equivalency
here, things break.
any idea how to
fix this without
re-engineering my
definitions?

This is how Palamidessi uses the requirement of a symmetric network in the leader election problem to forge a more general requirement on the encoding.

The other requirement is on *reasonability* and is on the target language's semantics. Reasonability to Palamidessi means that the language itself can distinguish between two processes when their actions are different on a certain given channel. This essentially encapsulates the requirements of the leader election problem. That is, a electoral system would be one where actions on the output channel are the same and we want our target language to be capable of semantically distinguishing this from a non-electoral system (where actions on the output channel differ).

reasonability

TODO:
come up with an
implement a short
hand for the cal-
culi: SPI and API?

4.2 Implications

Given these two definitions, we can say with Palamidessi that no uniform encoding of the synchronous π -calculus into the asynchronous π -calculus preserving reasonable semantics exists. This is a very strong result: weakening either of the requirements that Palamidessi assumes seems like it would produce an encoding not rigorous enough to study. For this reason, the fully expressive synchronous π -calculus seems like a better candidate for formal study than the asynchronous π -calculus.

However, we need still consider the implementation of a synchronous π -calculus. On distributed systems, we have only asynchronous sending available to us. Hence, it is useful to study the asynchronous π -calculus as well it models these systems more accurately than a synchronous model. In the study of distributed systems, rather than showing the asynchronous to be not worth our time, Palamidessi's separation result raises the question of whether we should be considering *synchronous* calculi.

distributed systems
↪ page 2

However, we still would like to be able to use the expressiveness of the synchronous π -calculus if possible — it allows us to solve a large class of problems much more easily and clearly. We saw just how useful the synchronous π -calculus can be for expressing distributed systems in our extended mobile phone network example in the introduction. We could have modeled this system in the asynchronous π -calculus, but it would have involved a convoluted mess of acknowledgement channels just to express the necessary ordering of events in the system. Hence, the next chapter looks at some of the more implementation-minded encodings of the synchronous π -calculus in the asynchronous π -calculus, and to what extent we need to relax Palamidessi's requirements to allow these encodings.

4.3 The Bakery Algorithm

4.4 Symmetry in Practice

The creators of Pict, the Join-calculus, and other implementations based on the π -calculus all decided to have their primitives support only asynchronous communication, while synchronous communication is made available on top of this via a library or higher-level language. This greatly simplifies implementation, resulting in a

cleaner, more efficient core language. The summation operator in particular is difficult and expensive to fully simulate. In the implementation of Pict, for example, David Turner notes [Tur96] that “the additional costs imposed by summation are unacceptable.”. Turner goes on to say that essential uses of summation are infrequent in practice.

Speaking in an interview on developing the π -calculus, Robin Milner notes [Ber03]:

That was to me the challenge: picking communication primitives which could be understood at a reasonably high level as well as in the way these systems are implemented at a very low level...There’s a subtle change from the Turing-like question of what are the fundamental, smallest sets of primitives that you can find to understand computation...as we move towards mobility... we are in a terrific tension between (a) finding a small set of primitives and (b) modeling the real world accurately.

This tension is quite evident in the efforts of process algebraists to find the ‘right’ calculus for modeling distributed systems. While the synchronous π -calculus more elegantly and (given certain assumptions) completely expresses distributed systems, actual implementation must commit to asynchronous communication as their primitives. Which we choose as a model depends in part on our goals. In any case, it is evident that by limiting ourselves to smaller calculi, many useful new concepts and structures arise in order to solve the problems posed by asynchronous communication. While these structures might not belong in the ‘smallest set of primitives’, they are useful for bringing the power of the π -calculus to a model that more closely resembles the implementation of distributed systems.

1.1.1 A Distributed Mobile System	2
1.3.1 Simplified Mobile Phone Network in the π -calculus	5
2.1.1 Terms in the asynchronous π -calculus	8
3.1.1 Terms in the synchronous π -calculus	26
3.1.2 Structural equivalence axioms in the synchronous π -calculus	27
3.2.1 Reduction rules for the synchronous π -calculus	28
3.2.3 Action rules for the synchronous π -calculus	29
3.3.1 Rules for applying σ	30

- [Ber03] Martin Berger. An interview with robin milner, September 2003.
- [Cas02] I. Castellani, editor. *Models of Distribution and Mobility: State of the Art*. MIKADO Global Computer Project, August 2002.
- [Hen07] Matthew Hennessy. *A Distributed Pi-Calculus*. Cambridge University Press, 2007.
- [Mil92] Robin Milner. Functions as processes. *Mathematical Structures in Computer Science*, 2(2):119–141, 1992.
- [Mil99] Robin Milner. *Communicating and Mobile Systems: the π -calculus*. Cambridge University Press, 1999.
- [Nes00] Uwe Nestmann. What is a “good” encoding of guarded choice? *Inf. Comput.*, 156(1-2):287–319, 2000.
- [Pal03] Catuscia Palamidessi. Comparing the expressive power of the synchronous and the asynchronous π -calculus. *Mathematical Structures in Computer Science*, 13(5):685–719, 2003.
- [PH01] C. Palamidessi and O. Herescu. A randomized encoding of the π -calculus with mixed choice, 2001.
- [SW01] Davide Sangiorgi and David Walker. *The π -calculus: A Theory of Mobile Processes*. Cambridge University Press, 2001.
- [Tur96] David N. Turner. *The Polymorphic Pi-Calculus: Theory and Implementation*. PhD thesis, 1996.

α -equivalency, 12
 λ -calculus, 1
 π -calculus, 4

Action, 18
arity, 9, 17
asynchronous, 6, 9

bound identifiers, 11, 17

capture, 12
CCS, 4
channels, 3
choice, 10
choice operator, 6
closed terms, 12
concurrency, 3
Context, 13
contextual, 13, 18

definitions, iii
distributed systems, 2, 29

equivalence, 11
exported, 17
exposes, 13
external action, 17

free identifiers, 11

guarded, 9, 24, 26

handshake, 9

identifiers, 8, 11
instantiate, 13
interface, 4, 12
internal action, 17
internal evolution, 14, 25

Labelled Transition System, 16
location, 4
lock, 22

message passing, 3, 8
mobility, 3, 14

non-determinism, 10, 24

parallel, 6, 8

patterns, 9
process, 3

race condition, 22
reasonability, 29
Reduction, 15
residual, 16

scope, 9, 11
scope extrusion, 9, 14, 17
scope restriction, 9
source language, 28
Structural Equivalence, 14
substitution, 12
summation, 10
synchronous, 6, 10
system, 10

target language, 28
topology, 3
tuple, 9

uniformity, 28