

quantms-rescoring and multi-engine searching enable deep proteome coverage across quantitative proteomics, immunopeptidomics, and phosphoproteomics

Chengxin Dai^{1,2}, Ralf Gabriels^{3,4}, Robbin Bouwmeester^{3,4}, Jonas Scheid^{5,6,7,8}, Henry Webel⁹, Lennart Martens^{3,4,10,11}, Oliver Kohlbacher¹¹, Mingze Bai¹², Timo Sachsenberg¹³, and Yasset Perez-Riverol^{14,*}

¹State Key Laboratory of Medical Proteomics, Beijing Proteome Research Center, National Center for Protein Sciences (Beijing), Beijing Institute of Lifeomics, 102206, Beijing, China

²International Academy of Phronesis Medicine (Guangdong), 510320, Guangdong, China

³CompOmics, VIB Center for Medical Biotechnology, VIB, Ghent, 9052, Belgium

⁴Department of Biomolecular Medicine, Faculty of Medicine and Health Sciences, Ghent University, Ghent, 9052, Belgium

⁵Department of Peptide-based Immunotherapy, Institute of Immunology, University and University Hospital Tübingen, Tübingen, Germany

⁶Cluster of Excellence iFIT (EXC2180) Image-Guided and Functionally Instructed Tumor Therapies, University of Tübingen, Tübingen, Germany

⁷Quantitative Biology Center (QBiC), University of Tübingen, Tübingen, Germany

⁸Institute for Bioinformatics and Medical Informatics (IBMI), University of Tübingen, Tübingen, Germany

⁹The Novo Nordisk Foundation Center for Biosustainability, Technical University of Denmark, Lyngby, Denmark

¹⁰BioOrganic Mass Spectrometry Laboratory (LSMBO), IPHC UMR 7178, University of Strasbourg, CNRS, Strasbourg, 67000, France

¹¹Infrastructure Nationale de Proteomique ProFI - FR2048, Strasbourg, 67087, France

¹²Chongqing Key Laboratory of Big Data for Bio Intelligence, Chongqing University of Posts and Telecommunications, Chongqing, China

¹³Department of Computer Science, Applied Bioinformatics, University of
Tübingen, Tübingen, Germany

¹⁴European Molecular Biology Laboratory, European Bioinformatics
Institute, Wellcome Genome Campus, Cambridge, United Kingdom

*Corresponding author: yperez@ebi.ac.uk

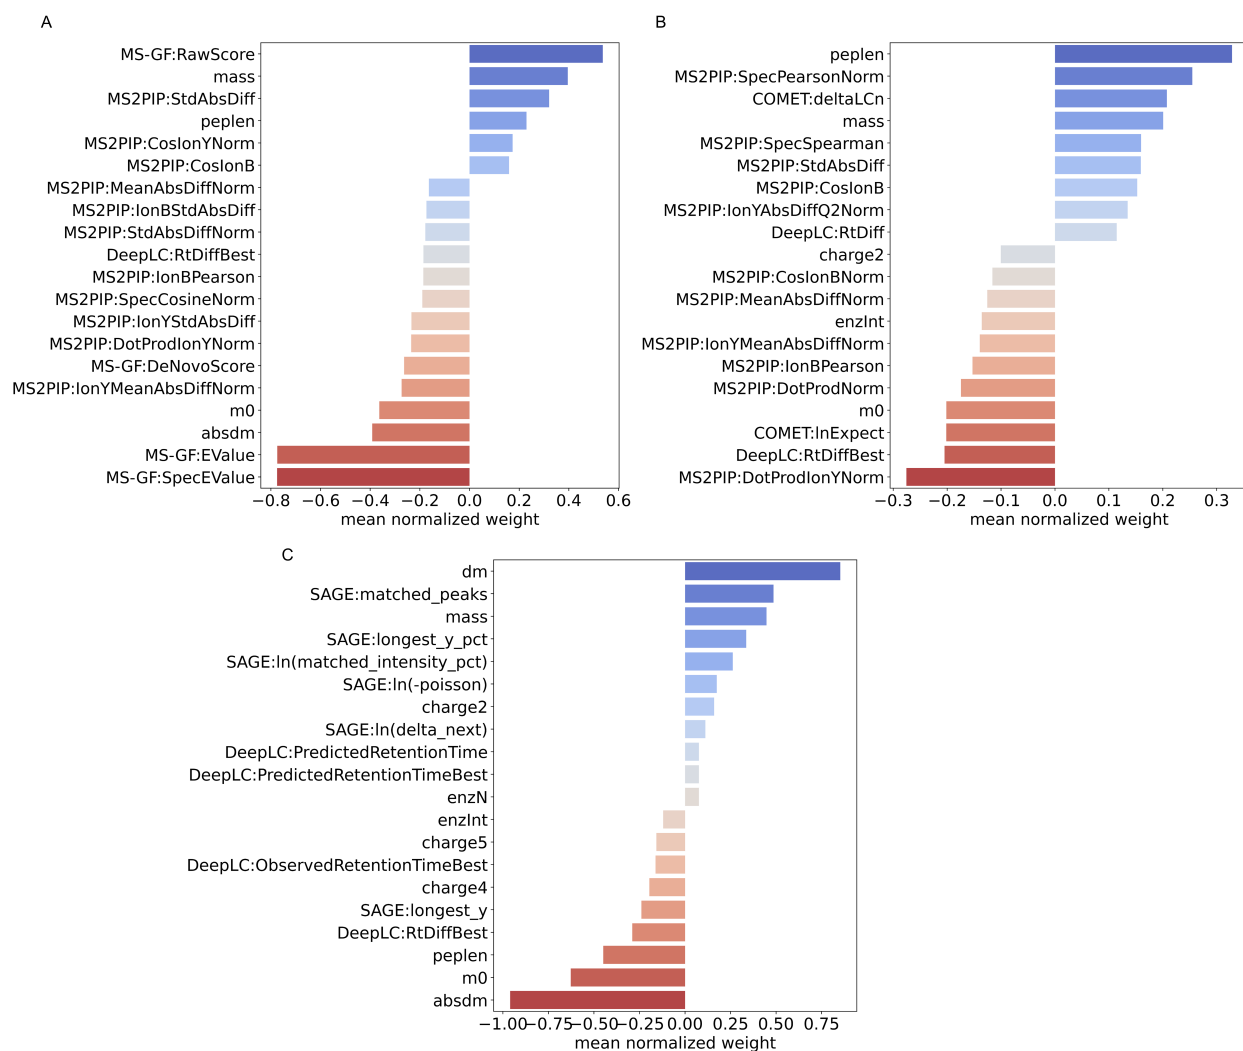


Figure S1: The weights that Percolator assigns to different features of the search engine feature vector in MSGF+ (A), Comet (B), and SAGE (C) combined with Percolator settings from PXD001819. The more different from zero a weight is (both positive and negative), the more important that feature is in the final Percolator classification.

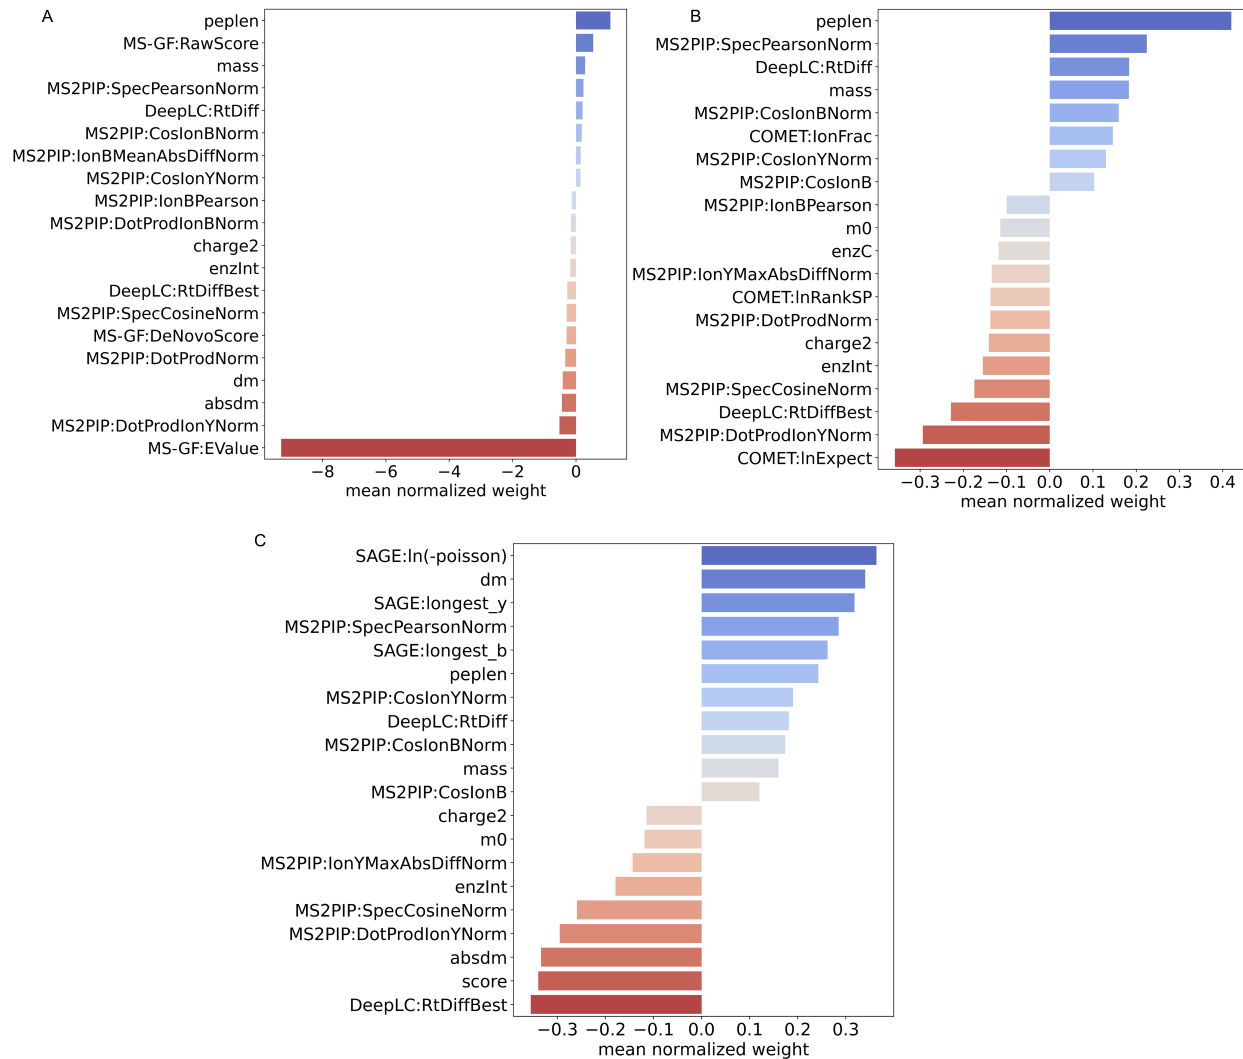


Figure S2: The top 20 normalized weights from Percolator for MSGF+ (A), Comet (B), and SAGE (C) identification results from PDC000125.

Table S1: Spectrum-quality features. The memory and CPU values represent the maximum resources required for a single job. The quantms workflow was run in a 64 cluster queue.

Features	Definition
signal to noise	The signal-to-noise ratio calculated as the maximum intensity divided by the root mean square deviation of the intensities for a spectrum.
spectral entropy	The entropy of normalized intensity
fraction tic top 10	The intensity fraction of top 10 peaks for total ion current
weighted std mz	The standard deviation of weighted m/z

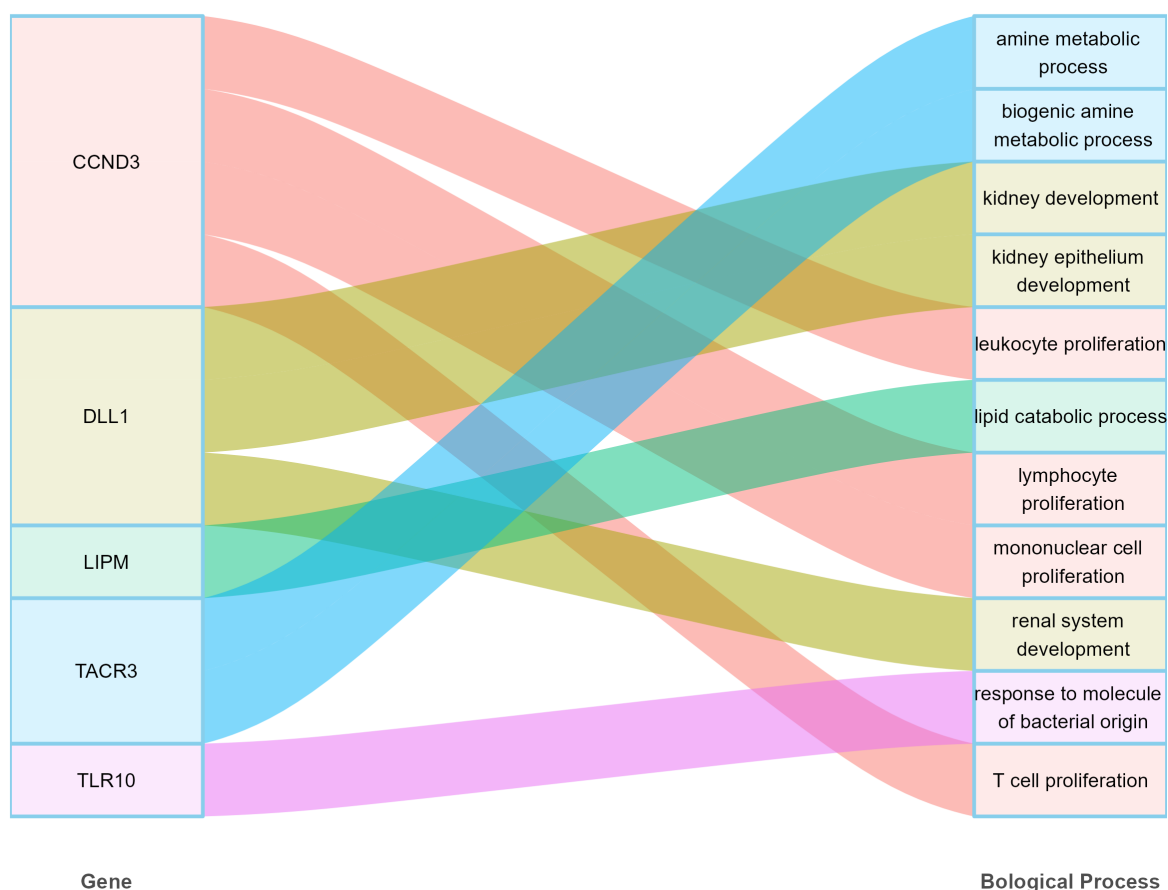


Figure S3: The GO enrichment analysis for MSGF+&Comet with quantms-rescoring. The Sankey diagram shows biological process term of the genes are uniquely reported by MSGF+&Comet with quantms-rescoring compared without quantms-rescoring.

Table S2: Runtime, memory, and CPU consumption for different configurations. The memory and CPU values represent the maximum resources required for a single job. The quantms workflow was run in a 64 cluster queue.

Datasets	Configuration	Runtime	Memory	CPU
PDC000127	Comet&MSGF+&MS ² Rescore	9h39m	30G	7
PDC000127	Comet&MSGF+	6h28m	8G	4
PDC000127	Comet	5h10m	8G	4
PXD019643	Comet&MSGF+&MS ² Rescore	15h57m	20G	8
PXD019643	Comet&MSGF+	13h09m	5.5G	4
PXD019643	Comet	2h05m	5.5G	4
PXD026824	Comet&MSGF+&MS ² Rescore	2h05m	66G	8
PXD026824	Comet&MSGF+	1h17m	48.4G	4
PXD026824	Comet	24m	48.4G	4

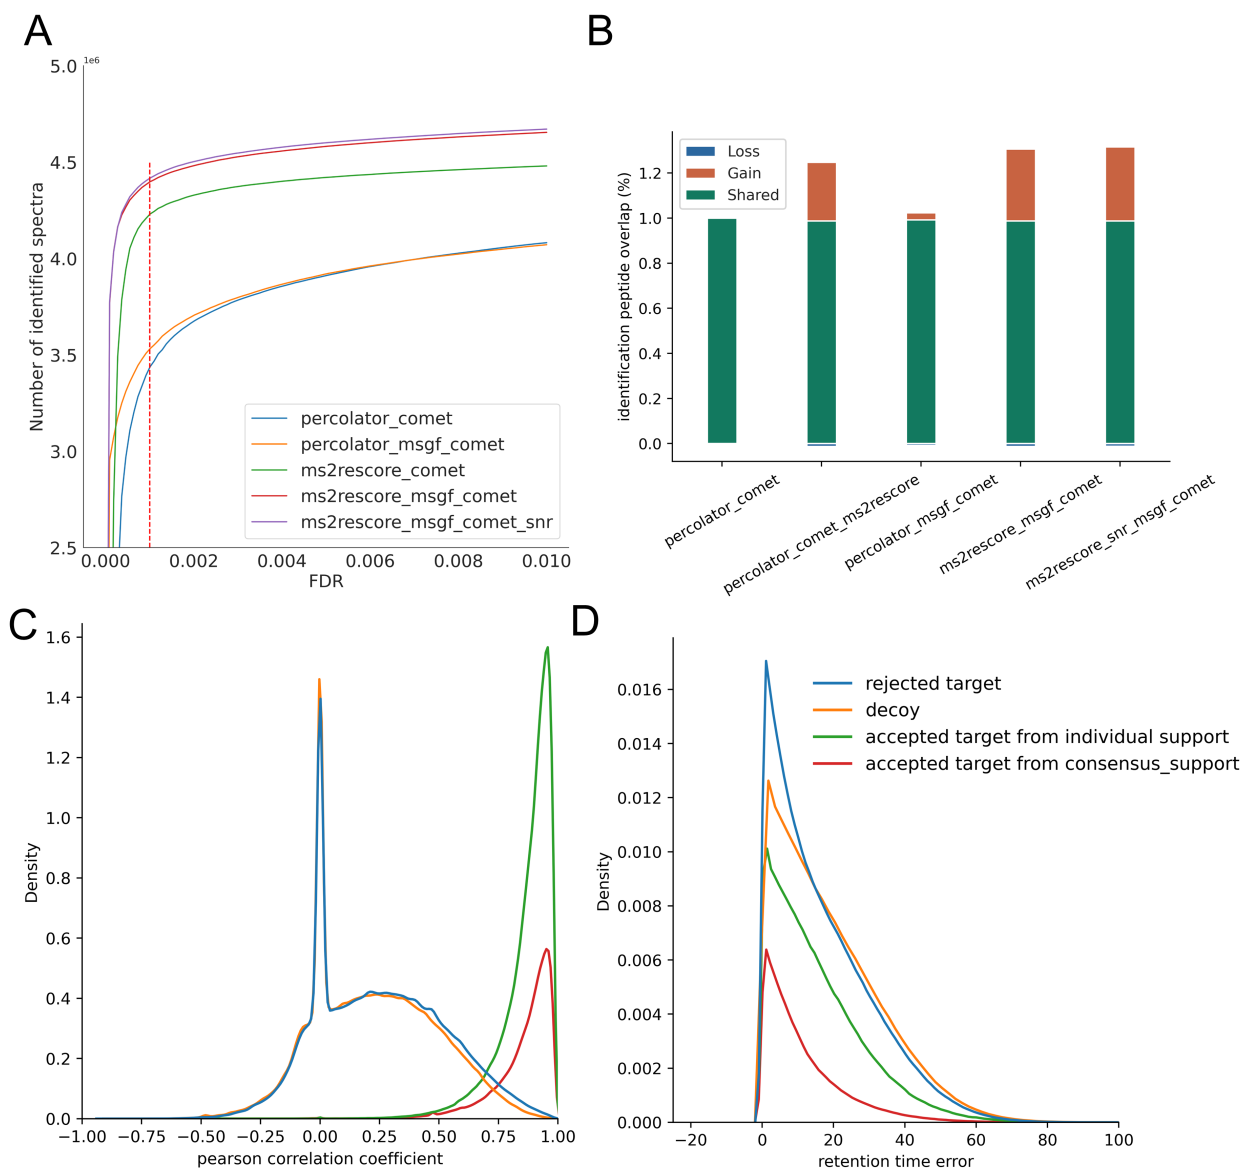


Figure S4: Comparison of immunopeptides identification results for different workflow settings on PXD019643. (A) Line plot showing the number of spectra identified for four workflow settings at different PSM FDR levels. (B) Percentage of unique identified peptides using different workflow settings. Density plots showing the distribution of the smallest retention time error between observed and predicted retention time (C) and the Pearson correlation between observed and predicted peak intensities (D) for each PSM split into decoys (red), rejected targets with $q\text{-value} > 0.01$ (blue), and accepted targets from individual support and consensus support with $q\text{-value} < 0.01$ (green). Note that the rejected target distribution coincides with the decoy distribution. The pronounced spike at Pearson correlation = 0 reflects spectrum comparisons in which all predicted or observed peaks have zero intensity, causing a division-by-zero situation that leaves the Pearson correlation undefined.

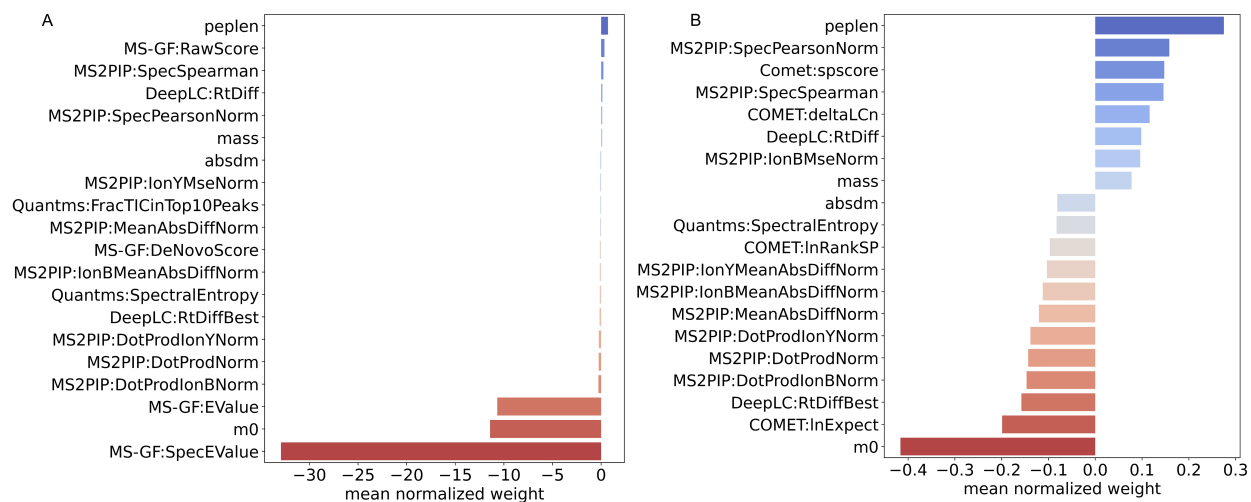


Figure S5: The top 20 normalized weights from Percolator for MSGF+ (A) and Comet (B) identification results in the PXD019643 dataset.

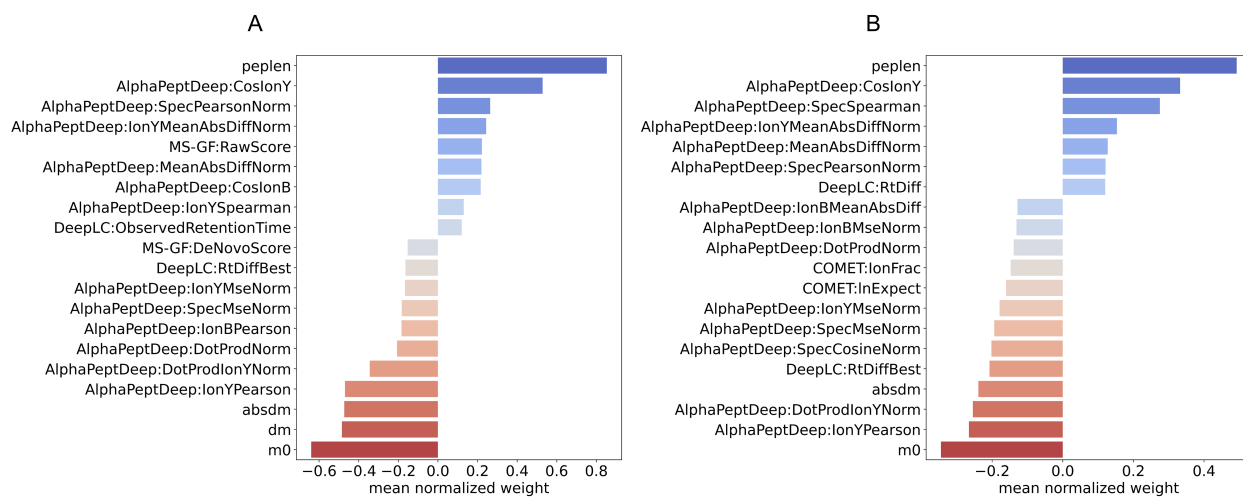


Figure S6: The top 20 normalized weights from Percolator for MSGF+ (A) and Comet (B) identification results in the PXD026824 dataset.