

Mathematical Modelling

APM348 Notes



Bernardo Galvão-Sousa

-
- 1 1.1 What is modelling?
- 1.2 Modelling Procedure – DABAR¹

- Step 1. Define the problem*
- Step 2. make Assumptions*
- Step 3. Build a model*
- Step 4. Assess the model*
- Step 5. Report results*

- 1.3 Course topics:

- Optimization models
- Dynamical models
- Probability models

Optimization Models

-
- 2 PROB Optimization Problem²
- A pig weighting 90 kg gains 3 kg per day and cost 45 cents a day to keep. The market price for pigs is 65 cents/kg, but is falling at 1 cent per day. When should the pig be sold?

Introduce variables:

- t = time at which the pig is sold (in days)
- w = weight of the pig (in kg)
- m = market price of a pig (in \$/kg)
- C = cost of keeping the pig (in \$)
- R = revenue from selling the pig (in \$)
- P = profit from the sale of the pig (in \$)

- 2.1 Which of these variables depend on t ? Based on the statement, what do we know about their values?
- 2.2 What is our goal?
- 2.3 Solve the problem.
- 2.4 Answer the question: when should the pig be sold and what is the profit?

Parameter Sensitivity

Parameter sensitivity is a measure of how a model's response is affected by its parameters.

We quantify the **sensitivity** for the model output x and model parameter p by

$$S(x, p) = \frac{\partial x}{\partial p} \cdot \frac{p}{x},$$

which is dimensionless.

Example: If the time to sell or the profit depends strongly on a parameter, then the model is not very useful. If the model said to sell at $t = 1$ if the daily maintenance cost changed to 46 cents, then the recommendation would be very suspect!

¹based on the <https://m3challenge.siam.org/wp-content/uploads/siam-guidebook-final-press.pdf>.



2.5 Let (t^*, P^*) be the optimal values found before.

What is the sensitivity of P over the parameter c_d = the daily maintenance cost of keeping a pig?

2.6 Is $S(P^*, c_d)$ positive/negative? What does that mean? Does that make sense?

2.7 What is the sensitivity of P over the parameter m_0 = the initial market price of a pig (in \$/kg)?

2.8 Is $S(P^*, m_0)$ positive/negative? What does that mean? Does that make sense?

Robustness

How do the results depend on the assumptions?

We assumed:

- a linear increase in weight of the pig
- a linear decrease in the price of the pig

What happens if these were nonlinear? The prediction of prices is notoriously uncertain.

Prices are often modelled as stochastic processes (like Brownian motion). This would necessitate a different modelling approach.

In particular, we might then want to maximize the expected (average) profit. But if the variance is very large, then the farmer might prefer a lower expected profit if that means lowering the risk (variance). The farmer might consider maximizing the expected profit with a constraint on the variance of the profit.

3

PROBLEM


A manufacturer of lawn furniture makes two types of chairs, one with a wood frame and the other with an aluminum frame. The wood frame chair costs \$18 per unit to manufacture and aluminum frame chair costs \$10 per unit to manufacture. The company operates in a market where the number of units that can be sold depends on price. It is estimated that in order to sell x units per day of the wood chair and y units per day of the aluminum chair, the selling price cannot exceed $10 + 31x^{-0.5} + 1.3y^{-0.2}$ dollars per unit for the wood chair and $5 + 15y^{-0.4} + 0.8x^{-0.08}$ dollars per unit for the aluminum chair.

Let us first investigate the selling price model for **one type** of chair.

3.1 As more chairs of both types are sold in the market: $x \rightarrow \infty$, what do you expect will happen to their selling price?

3.2 As chairs become scarce: $x \rightarrow 0^+$, what happens to the price?

3.3 What family of functions satisfies both these conditions?

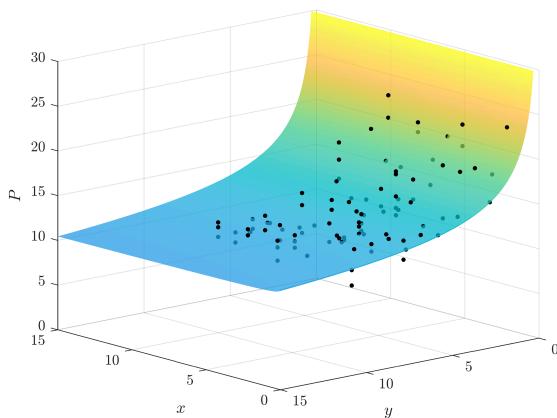

Historical prices and fitting surface $p = f(x, y)$.

A manufacturer of lawn furniture makes two types of chairs, one with a wood frame and the other with an aluminum frame. The wood frame chair costs \$18 per unit to manufacture and aluminum frame chair costs \$10 per unit to manufacture. The company operates in a market where the number of units that can be sold depends on price. It is estimated that in order to sell x units per day of the wood chair and y units per day of the aluminum chair, the selling price cannot exceed $10 + 31x^{-0.5} + 1.3y^{-0.2}$ dollars per unit for the wood chair and $5 + 15y^{-0.4} + 0.8x^{-0.08}$ dollars per unit for the aluminum chair.

4.1 We want to maximize the manufacturer's profit. What is the function to maximize?

4.2 This is a two-dimensional function, so we need to solve the system

$$\frac{\partial f}{\partial x} = 0$$

$$\frac{\partial f}{\partial y} = 0$$

Write down this system.

4.3 How can we find the solution?

Newton's Method

This is a method to approximate the solution of the equation

$$f(x) = 0.$$

This is an iterative method, so we start with an initial approximation x_0 .

For each successive approximation, take the linear approximation of f at x_i and take x_{i+1} to be the point where the linear approximation is 0.



4.4 From the description above, sketch the point x_1 on the graph on the right when using Newton's method.

4.5 What is the formula for x_1 ?

4.6 Leveraging python.

- (a) Clone the file `chairs_newton.ipynb` into your Jupyter Notebook
- (b) In the file, introduce the partial derivative functions and an initial guess.
- (c) Run the script

```
Minimum for 4.689577973016851 wooden chairs and 5.852031046491972 aluminum chairs
Profit = 52.072691798595706
```

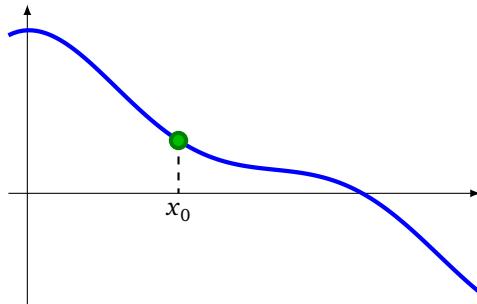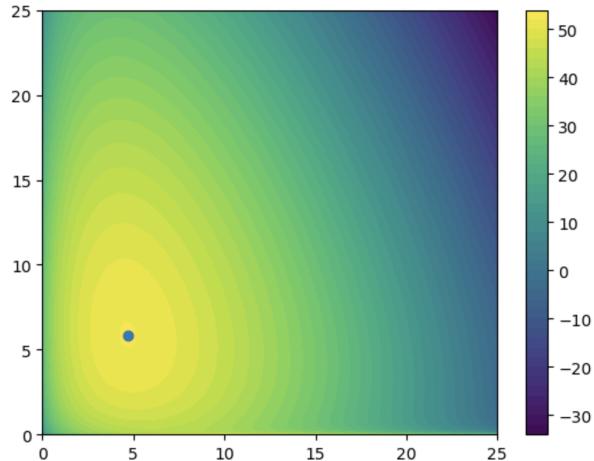

4.6 Leveraging python's minimization tools.

- (a) Clone the file `chairs_fmin.ipynb` into your Jupyter Notebook

(b) In the file, introduce the profit function and an initial guess.

(c) Run the script

5

PROBLEM

A manufacturer of lawn furniture makes two types of chairs, one with a wood frame and the other with an aluminum frame. The wood frame chair costs \$18 per unit to manufacture and aluminum frame chair costs \$10 per unit to manufacture. The company operates in a market where the number of units that can be sold depends on price. It is estimated that in order to sell x units per day of the wood chair and y units per day of the aluminum chair, the selling price cannot exceed $10 + 31x^{-0.5} + 1.3y^{-0.2}$ dollars per unit for the wood chair and $5 + 15y^{-0.4} + 0.8x^{-0.08}$ dollars per unit for the aluminum chair.

Sensitivity. To compute p^* , you can use `chairs_sensitivity.ipynb`.

5.1 How sensitive is the profit to the parameter $c = 10$ (the production cost of the aluminum chair)

$$S(p^*, c) \approx \frac{p^*(c+h) - p^*(c)}{h} \cdot \frac{c}{p^*(c)}?$$

5.2 How sensitive is the profit to the parameter $b = 0.4$ (the exponent of y in the selling price of the aluminum chair)

$$S(p^*, b) \approx \frac{p^*(b+h) - p^*(b)}{h} \cdot \frac{b}{p^*(b)}?$$

6

Constrained Optimization. How do we solve optimization problems with constraints?

DEFINITION

Lagrange Multipliers

We want to minimize (or maximize) a function $f(x)$ with several constraints:

$$g_1(x) = c_1$$

\vdots

$$g_k(x) = c_k$$

If $x^* \in \mathbb{R}^N$ is a local optimal of $f(x)$ which satisfies the above constraints, and $\nabla g_1(x^*), \dots, \nabla g_k(x^*)$ are linearly independent, then

$$\nabla f(x^*) = \lambda_1 \nabla g_1(x^*) + \dots + \lambda_k \nabla g_k(x^*), \quad (\text{LM})$$

for some scalars $\lambda_1, \dots, \lambda_k$.

DEFINITION

Notes:


1. This is a necessary, but not sufficient condition.
2. To solve the optimization problem, find candidates x that satisfy it, and then pick the best one.
 - Points for which $\nabla g_1(x), \dots, \nabla g_k(x)$ are linearly dependent should also be candidates.
3. $(\text{LM}) \Leftrightarrow \nabla f(x^*) \in \text{span}\{\nabla g_1(x), \dots, \nabla g_k(x)\}$.
4. The “optimal” values for $\lambda_1, \dots, \lambda_k$ give important insights on the problem, as we will see – don’t ignore them!

PROB

Example

Consider the problem:

- Maximize $x + y$ such that $x^2 + y^2 = 1$.

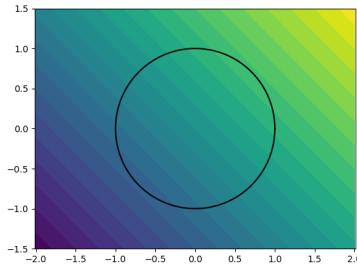

6.1 Use Lagrange Multipliers to find the maximum (and the minimum).

6.2 If the constraint was $x^2 + y^2 = c$, then what is:

- (a) the maximizer point (x^*, y^*) ?
- (b) the Lagrange multiplier λ^* ?
- (c) the maximum $f(x^*, y^*)$?

6.3 Compare λ^* with $\frac{\partial f(x^*, y^*)}{\partial c}$.

6.4 Based on this relation, give an interpretation for the Lagrange Multiplier.

7

Define the problem.

PROBLEM


The production side of the electrical power grid^a consists of hundreds or thousands of power plants that vary in fuel sources (coal, nuclear, hydroelectric, solar, wind, stored energy in the batteries of electric vehicles, etc.) and characteristics (age, efficiency, automated, etc.).

How can the power consumption load be allocated to these plants to minimize cost?

^aThis example is based on Huijuan Li in ‘Lagrange Multipliers and their Applications’.

Make Assumptions.

- Each power plant is summarized by a cost curve which tells how much a given load costs. Generally, the cost per unit time per unit load of operating a power plant is a concave function of load as in the figure below: small and large loads are expensive.
- For simplicity, we will approximate these quadratics by a linear function with one parameter: the cost per unit time per unit load is $c(x) = ax + 1$, so the cost rate function has the form $f(x) = (ax + 1)x = ax^2 + x$.

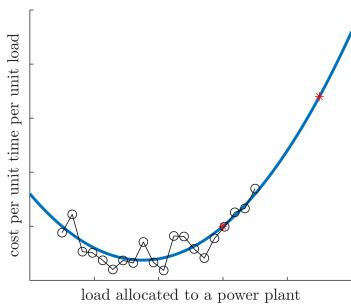

- N = number of power plants
- x_i = load assigned to power plant i (in MW)
- X = total load (in MW) (In Toronto the average total load is 2500 MW.).
- C = cost rate of power generation (in \$/h)
- $f_i(x_i)$ = cost rate function for power plant i (in \$/h)

Build a model.

7.1 Find an equation relating X and x_i .

7.2 Find a formula for C .

7.3 Formulate the problem we want to solve.

Assess the model.

We are going to assume the following:

- Three power plants identified with the parameters:
 - $a_1 = 0.0625$
 - $a_2 = 0.0125$
 - $a_3 = 0.0250$
- The total load is 925 MW

7.4 Solve the problem.

Report the results.


7.5 What is the interpretation of λ^* the “optimal” Lagrange multiplier?

7.6 What is the sensitivity of the cost with respect to the parameters a_i and X ? What does that mean about the model?

8

Robustness.

8.1 The parameter X varies significantly (regularly by over 50% in a day), so understanding it is very important.

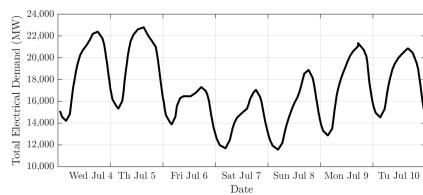

It is crucial to understand how the optimal cost and loads change with X .

8.2 Is the quadratic model for f_i good? You can try different functions.

8.3 Should there be other constraints on x_i ? We only imposed $x_i > 0$, but we probably should impose upper bounds too.

8.4 What about transportation costs? There can be losses of up to 20% on high-tension transmission lines.

8.5 We have a static model, where the power plants operate always at the same load. We might want to consider a dynamic optimization model.

9

Linear Programming³

A family farm has 1250 hectares^a of land for planting. Possible crops that they could plant are corn, wheat, and oats. There are 400 hectare-m (a volume) of water available for irrigation and 600 hours of labour per week available. The requirements and expected yields are shown below.

	corn	wheat	oats
irrigation (ha-m / ha)	1.0	0.3	0.5
labour (person-h / week / ha)	1.6	0.4	0.6
yield (\$/ha)	1400	420	700

We want to maximize the total yield.

^a1 hectare = 1 ha = 10 000 m².

Introduce the following variables:

- x_i = hectares planted of $i = 1$ corn, $i = 2$ wheat, $i = 3$ oats
- w = the total irrigation used in ha-m
- ℓ = the total labour used in person-h / week
- a = the total area planted in hectares
- y = the total yield in \$

9.1 Find expressions for w, ℓ, a, y


9.2 What are the constraints on the variables defined?

9.3 Formulate the optimization problem we want to solve in standard linear programming form:

$$\begin{array}{ll} \text{Objective:} & \max \vec{c}^T \vec{x} \\ \text{Constraints:} & A\vec{x} \leq \vec{b} \\ & \vec{x} \geq \vec{0} \end{array}$$

9.4 Use `farm-linearprog.ipynb` to find the solution.

We ran the same model with the Wheat Yield ranging from \$400/ha to \$440/ha and obtained the following graphs.

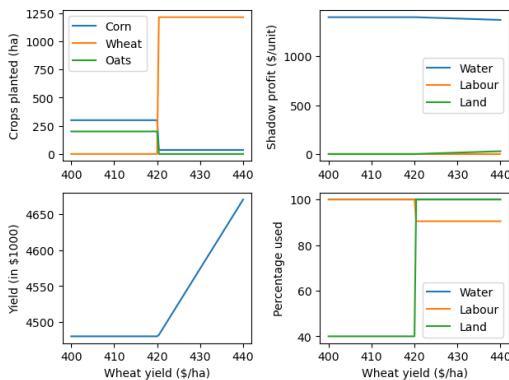

9.5 Interpret the results and the shadow profit (— shadow cost).

10

Modified farming problem

We modify the original optimal farming problem to include the notion of plots. The 1250 hectares farm is broken down into 5 plots of 240 hectares each and one 50 hectare plot. For convenience, the farmers want to plot only one crop on each plot. As before, 400 ha-m of water and 600 hours of labour are available. The requirements and expected yields are shown below.

	corn	wheat	oats
irrigation (ha-m / ha)	1.0	0.3	0.5
labour (person-h / week / ha)	1.6	0.4	0.6
yield (\$/ha)	1400	420	700

We want to maximize the total yield.

Introduce the variables:

- x_1, x_2, x_3 are the number of large plots of corn, wheat, and oats respectively;
- x_4, x_5, x_6 are the number of small plots of corn, wheat, and oats respectively.

10.1 Set up and solve the problem.

10.2 Interpret the results.

PROBLEM Ice Cream⁴

Suppose a manufacturing company receives an order for B units to be delivered at time T , e.g. Sobeys has placed an order for $B = 100$ pallets of Chapman's vanilla ice-cream for a promotion starting in $T = 10$ days.

Chapman's Ice Cream must decide when to produce their tasty product. They don't want to produce it early since they will have to pay to keep it frozen until the order is due. They also do not want to produce it the day before it is due since running the production line fast might have a large cost.

Let $x(t)$ be the inventory at time t and suppose that $x(0) = 0$ and to fill the order we need $x(T) = B$ (boundary conditions).

- 11.1 Let us divide the time interval $[0, T]$ into N "chunks". What is the length Δt of each?
- 11.2 Let Δx_n be the number of units produced during the n^{th} time interval. Find a formula relating Δx_n with $x(t)$. Find an equation relating Δx_n with B .
- 11.3 We need to consider the cost of storing the produced units in inventory: assume that each unit has a cost of c_2 per unit time. What is the total inventory cost?
- 11.4 We want to model the fact that running machines faster is more costly. What is a model for the cost of producing Δx_n units during a time interval of length Δt that quantifies this?
- 11.5 What is the total production cost?
- 11.6 What is the total cost?
- 11.7 What are the constraints for the variables?
- 11.8 Approximate the solution.

In the previous problem, instead of modelling it using **discrete time**, we can model it using **continuous time**.

Then, we have the following:

- $\frac{dx}{dt}(t)$ = units produced per unit time (at time t)
- Inventory cost = $\int_0^T c_2 \frac{dx}{dt}(t)(T-t) dt = \int_0^T c_2 x(t) dt$ (why?)
- Production cost = $\int_0^T c_1 \left(\frac{dx}{dt}\right)^2 dt$ (why?)

We can formulate the problem as

Objective: $\min \int_0^T c_1(x'(t))^2 + c_2 x(t) dt$
 Constraints: $x(0) = 0$ and $x(T) = B$
 $x'(t) \geq 0$

The goal here is to find a function $x(t)$. This is a problem in **Calculus of Variations**.

PROBLEM Euler-Lagrange Equation

We want to find a function $x : [t_0, t_1] \rightarrow \mathbb{R}$ that minimizes the functional:

$$\min \int_{t_0}^{t_1} F(t, x(t), x'(t)) dt$$

and $x(t_0) = x_0$ and $x(t_1) = x_1$.

When we want to find a minimizer of a function, we set the derivative to zero.

13.1 The definition of derivative for a real function is

$$f'(x) = \lim_{\varepsilon \rightarrow 0} \frac{f(x + \varepsilon) - f(x)}{\varepsilon}$$

We only have one direction for ε , so this limit suffices. For a function of multiple variables, we introduced the notion of partial derivative:

$$\frac{\partial f}{\partial x_i}(\vec{x}) = \lim_{\varepsilon \rightarrow 0} \frac{f(\vec{x} + \varepsilon \vec{e}_i) - f(\vec{x})}{\varepsilon}$$

Our case is similar, but instead of having vectors as inputs, our inputs are functions $x(t)$, so our definition must be adapted to:

- Let $y(t) = x(t) + \varepsilon v(t)$

What are conditions on $v(t)$ that guarantee that $y(t)$ is an admissible function for the problem formulated in the blue box above?

13.2 Let $g(\varepsilon) = \int_{t_0}^{t_1} F(t, y(t), y'(t)) dt$. Expand the formula for $g(\varepsilon)$.

13.3 Expand $g'(0)$.

13.4 Set $g'(0) = 0$ and solve.

Hint: If $\int_a^b f(t)v(t) dt = 0$ for every function $v(t)$ satisfying $v(a) = v(b) = 0$, then $f(t) = 0$ for all $t \in (a, b)$.

Euler-Lagrange Equation

The minimizer $x^*(t)$ of the functional

$$\min \int_{t_0}^{t_1} F(t, x(t), x'(t)) dt$$

with $x(t_0) = x_0$ and $x(t_1) = x_1$ satisfies the Euler-Lagrange Equation:

$$\frac{\partial F}{\partial x}(t, x^*, x^{*'}) = \frac{d}{dt} \frac{\partial F}{\partial x'}(t, x^*, x^{*'}).$$

DEFINITION

14

We will look back to **Exercise 12**.

14.1 Use the Euler-Lagrange Equation to obtain a Differential equation for $x(t)$.

14.2 Solve the differential equation with the boundary conditions.

14.3 We required $x'(t) \geq 0$. Does this solution satisfy this condition?

14.4 To get a solution that satisfies $x' \geq 0$, we need to consider a solution that doesn't produce any units for a while:


$$x(t) = \begin{cases} 0 & \text{if } t < t_1 \\ z(t) & \text{if } t_1 \leq t \leq T \end{cases}$$

What is t_1 and what is the function $z(t)$?

14.5 If we add a constraint $x'(t) \leq M$, how would that modify the solution? What does this restriction mean in the ice-cream context?

15

Dynamical Models

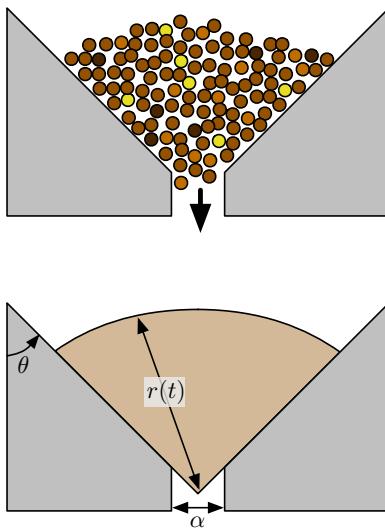

The following ordinary differential equation models a crowd leaving a stadium through an exit

$$2\theta r \frac{dr}{dt} = -k\alpha\sqrt{r}$$

based on the premise

(TL) Torricelli's Law: The area of the region occupied by the crowd decreases proportionally to the width of the exit times the square root of its radius.

16.1 How is the premise expressed in the differential equation?

16.2 Sketch a slope field for this model

<https://www.desmos.com/calculator/lxb4g6cuiz>

and use it to study how the time it would take to evacuate that section depends on the parameters.

16.3 Using Euler's method, estimate how long it would take to evacuate a stadium with $\alpha = k = 1$, $\theta = \frac{\pi}{5}$ and $r(0) = 2$.



Ladd Peebles Stadium

According to the paper "A study of stadium exit design on evacuation performance" studying the Ladd Peebles stadium:

- The average person occupies 0.15m^2 .
- The stadium fits 1200 people in one section.

- The exits are 1.5m wide.

17.1 According to an experiment in the paper, it took 8 minutes to evacuate the stadium. Use this to estimate k for Ladd Peebles.

17.2 In the same paper, “for safety, the maximum flow through an exit is 109 people per meter-width per minute.” Does Ladd Peebles satisfy this safety concern?

18


Numerical Methods for:

$$y' = f(t, y)$$

DEFINITION

Euler Method


$$\begin{aligned} y_{n+1} &= y_n + hk_1 \\ k_1 &= f(t_n, y_n) \end{aligned}$$



DEFINITION

Heun Method (Improved Euler)


$$\begin{aligned} y_{n+1} &= y_n + h \frac{k_1 + k_2}{2} \\ k_1 &= f(t_n, y_n) \\ k_2 &= f(t_n + h, y_n + hk_1) \end{aligned}$$



DEFINITION

Runge-Kutta Method (4th order)

$$\begin{aligned} y_{n+1} &= y_n + h \frac{k_1 + 2k_2 + 2k_3 + k_4}{6} \\ k_1 &= f(t_n, y_n) \\ k_2 &= f\left(t_n + \frac{h}{2}, y_n + \frac{h}{2}k_1\right) \\ k_3 &= f\left(t_n + \frac{h}{2}, y_n + \frac{h}{2}k_2\right) \\ k_4 &= f(t_n + h, y_n + hk_3) \end{aligned}$$



Desmos with all these three methods:

<https://www.desmos.com/calculator/haolaltd9s>

Consider the ODE $\frac{dy}{dx} = 2x \sin(x^2)$.

- 18.1 Recall the meaning of the line segments in the slope field for this ODE.
- 18.2 Consider the solution satisfying $y(0) = 0$. With a step $h = 0.1$, find the largest interval that the approximations stay within 0.1 distance of the exact solution.

19

Dimensional Analysis

DEFINITION

Seven Fundamental Dimensions

There are seven fundamental dimensions:

Dimension	Symbol	SI Unit	
length	L	metre	m
mass	M	kilogram	kg
time	T	second	s
electric current	I	ampere	A
temperature	Θ	kelvin	K
amount	N	mole	mol
light intensity	J	candela	cd

Note: Sometimes, we use charge Q (SI Unit coulomb C) as a fundamental dimension instead of current.

- 19.1 When can we add/subtract quantities? With different dimensions? With the same dimensions?
- 19.2 When can we equate quantities? With different dimensions? With the same dimensions?
- 19.3 When can we multiply/divide quantities? With different dimensions? With the same dimensions?
- 19.4 It is convenient to define some functions as a power series (e.g. $e^x = 1 + x + \frac{x^2}{2} + \frac{x^3}{6} + \dots$). What condition on the dimension of x is required to be able to do this?
- 19.5 What are the dimensions of a derivative $\frac{dy}{dx}$? What are the dimensions of an integral $\int y dx$?

Modelling: Relationship between the variables in a model must be dimensionally consistent.

20

Non-Dimensionalization. Consider the model for a mass undergoing radioactive decay:

$$\frac{dm}{dt} = -km$$

with $m(0) = m_0$.

- 20.1 What are the units of k ? What are the units of $t_c = \frac{1}{k}$?
- 20.2 Introduce new variables: $\tau = \frac{t}{t_c}$ and $\bar{m}(\tau) = \frac{m(t)}{m_0}$. What is the ODE satisfied by $\bar{m}(\tau)$? What are its units? What are the parameters for this equation?

21

Spruce Budworm Outbreak

PROBLEM

Consider the model for spruce budworm outbreak in Eastern Canada.^a

$$\frac{dN}{dt} = RN \left(1 - \frac{N}{K} \right) - \frac{BN^2}{A^2 + N^2}.$$

The first term accounts for resource-limited population growth within a tree and the second term accounts for the predation of the budworms by birds.

^aSee “Nonlinear Dynamics and Chaos” by Strogatz.

21.1 What are the units of N, A, B, K ?

21.2 To “non-dimensionalize” this ODE, what variable would you consider instead of N ? What ODE is satisfied by your new variable? How many parameters do you have now?

22

DEFINITION Dimensional Matrix

The dimensional matrix \mathcal{D} is a matrix where its (i, j) entry gives the power of the i^{th} dimension of the j^{th} variable.

Buckingham Pi Theorem

Any physical relation involving N dimensional variables can be written in terms of a complete set of $N - r$ independent dimensionless variables, where r is the rank of the dimensional matrix \mathcal{D} .

The notational convention for the Buckingham Pi Theorem is that the “pi’s”, Π_1, \dots, Π_{N-r} represent dimensionless variables and a relation between them is given by $F(\Pi_1, \dots, \Pi_{N-r}) = 0$.

PROBLEM Consider a pendulum. We make assumptions:

- The pivot is frictionless
- The rod is massless
- Air resistance is neglected
- The ceiling is infinitely rigid
- ...



22.1 What are the units of the following variables of interest?

- Period of the swing $[P] =$
- Pendulum mass $[m] =$
- Pendulum rod length $[\ell] =$
- Gravitational acceleration $[g] =$
- Amplitude of the swing $[\Theta] =$

22.2 Let us create the dimensional matrix:

- One column for each variable of interest (remember the order used for later)
- One row for each dimension
- Each term contains the power of the corresponding dimension for the corresponding variable

$$\mathcal{D} = \begin{bmatrix} [P] & [m] & [\ell] & [g] & [\Theta] \\ \downarrow & \downarrow & \downarrow & \downarrow & \downarrow \end{bmatrix} \begin{array}{l} \leftarrow M \\ \leftarrow L \\ \leftarrow T \end{array}$$

22.3 What is the rank of this matrix?

22.4 What is the dimension of the null space?

22.5 Find a basis for the null space.

For each vector of the null space basis,

$$\begin{bmatrix} 2 \\ 0 \\ -1 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

Buckingham Pi Theorem states that these correspond to non-dimensional variables Π_1 and Π_2 :

$$\Pi_1 = \frac{P^2 g}{\ell} \quad \text{and} \quad \Pi_2 = \Theta$$

and that there is a relation between them:

$$F(\Pi_1, \Pi_2) = 0 \quad \text{or} \quad \Pi_1 = f(\Pi_2) \quad \Leftrightarrow \quad \frac{P^2 g}{\ell} = f(\Theta)$$

which implies that

$$P = \sqrt{\frac{\ell}{g} \cdot f(\Theta)},$$

or in other words, the fact that the *period of the pendulum is proportional to the square root of its length* is a consequence of a pure dimensional analysis of the variables in the problem.


22.6 Recall the ODE for the pendulum: $\frac{d^2\theta}{dt^2} = -\frac{g}{\ell} \sin(\theta)$. Linearize⁵ it near the equilibrium $\theta = 0$.

22.7 Solve the linearized pendulum ODE, and compare the period of the linearized model to the nonlinear one.

23

PROBLEM

Consider the flow past a sphere.



You don't need to know much about fluid dynamics to be able to deduce some properties of the flow.

The sphere is in a fluid (water) and we measure the force necessary to keep the sphere from moving downstream.

We want to understand how the drag force depends on the upstream velocity.

23.1 What are the units of the variables of interest⁶?

- (a) drag force [F] =
- (b) upstream velocity [v] =
- (c) fluid density [ρ] =
- (d) sphere diameter [D] =
- (e) fluid viscosity⁷ [μ] =

23.2 Create a dimension matrix \mathcal{D} .

23.3 What is its rank? What is the dimension of its null space? Find a basis for its null space.

23.4 What are the non-dimensional variables Π 's from Buckingham Pi Theorem?

23.5 What relations do you obtain?

24

24.1 Use Buckingham Pi Theorem on Exercise 20 about radioactive decay.

24.2 Use Buckingham Pi Theorem on Exercise 21 about the budworm population.

⁵If you are not comfortable with linearization of an ODE, check exercise 61 on <https://raw.githubusercontent.com/siefkenj/IBLODEs/main/dist/odes.pdf>.

⁶This choice is part of the modelling process.

⁷Fluid viscosity is the sphere's resistance to deformation by shear stress. To help with the units, the formula for the Force from viscosity is $F = \mu \cdot A \cdot u / y$, where A is area, u is velocity and y is position.

Dog Shampoo

Scientists are testing the effect of different dog shampoos. Let

- F = number of fleas (in millions)
- D = number of dogs (in thousands)
- a = effect of different dog shampoos

and consider the model:

$$\begin{aligned} F' &= -(1 + a)F + D - 2 \\ D' &= -2F + (1 - a)D + 1 \end{aligned}$$

which is based on the following premises:

- (P1_F) Ignoring all else, the number of parasites decays in proportion to its population (with constant $1 + a$).
- (P2_F) Ignoring all else, parasite numbers grow in proportion to the number of hosts (with constant 1).
- (P1_D) Ignoring all else, hosts numbers grow in proportion to their current number (with constant $1 - a$).
- (P2_D) Ignoring all else, host numbers decrease in proportion to the number of parasites (with constant 2).
- (P1_C) Anti-flea collars remove 2 million fleas per year.
- (P2_C) Constant dog breeding adds 1 thousand dogs per year.

25.1 How are the premises expressed in the differential equations?


25.2 Find the equilibrium solutions for each value of $-1 \leq a \leq 1$.

25.3 Use `fleas_dogs.ipynb` and eigenvalues to check the stability⁸ of the equilibrium points for different values of $-1 \leq a \leq 1$.

⁸If you are not comfortable with studying the stability of the equilibrium solutions of a system of ODEs, then check exercises 32–61 of the `MAT244 in-class exercises`. You can also check sections 2.4 and 2.5 of the textbook ‘Difffy Qs’ by Jiri Lebl.

Mammalian Circadian Clock

PROBLEM

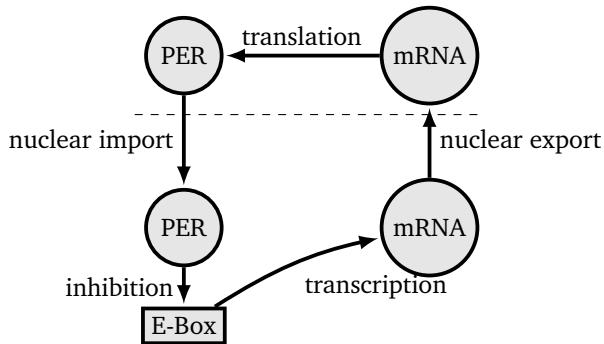

When the enhancer-box (E-Box) on the DNA is active, messenger RNA (mRNA) is produced. The mRNA is exported from the nucleus where it is translated into PER protein. The protein is imported into the nucleus where it inhibits the E-Box.

We get the model:

- x_1 = enhancer box on the DNA (E-box)
- x_2, x_3 = mRNA inside/outside the nucleus
- x_4, x_5 = PER outside/inside the nucleus


We get:

$$\begin{aligned} x'_1 &= -x_1 + e^{-\alpha x_5} \\ x'_2 &= -x_2 + x_1 \\ x'_3 &= -x_3 + x_2 \\ x'_4 &= -x_4 + x_3 \\ x'_5 &= -x_5 + x_4 \end{aligned}$$

where the exponential term represents the fact that the PER protein inhibits the E-box with “strength” α .

- 26.1 Find an approximation for the equilibrium solution for $\alpha = 1$.
- 26.2 This is a nonlinear problem. To linearize⁹ it around an equilibrium solution, find the Jacobian (or total derivative) J .
- 26.3 Use `circadian.ipynb` and eigenvalues to check the stability of the equilibrium points for different values of $\alpha \in [0, 100]$.

From the previous question, we obtained equilibrium solutions that changed from stable to unstable as we changed the parameter α – see the graph below.

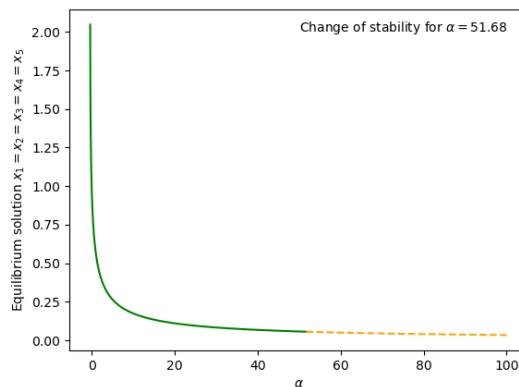

⁹If you are not comfortable with linearization of a system of ODEs, check exercise 61 on <https://raw.githubusercontent.com/siefkenj/IBLODEs/main/dist/odes.pdf>.

This is called a **bifurcation**.

Another type of bifurcation involves the creation or disappearance of equilibria as a parameter changes.

There are several typical types of bifurcations.

DEFINITION

Bifurcations

A (local) **bifurcation** occurs when a parameter change causes the stability of an equilibrium to change.

We will study four typical types of bifurcations.

1. **Saddle-node bifurcation.** Two equilibria collide and annihilate each other.
2. **Transcritical bifurcation.** An equilibrium exists for all values of a parameter and is never destroyed. However, the equilibrium interchanges its stability with another equilibrium as the parameter changes.
3. **Pitchfork bifurcation.** One equilibrium transitions to three equilibria as a parameter changes.
4. **Hopf bifurcation.** A periodic orbit appears (or disappears) through a change in the stability of an equilibrium point – this means that we transition from purely imaginary to complex eigenvalues.

Decide on the type of bifurcation for each ODE.

27.1 The ODE from Exercise 25.

27.2 The system of ODEs from Exercise 26.

27.3 The ODE $\frac{dx}{dt} = rx - x^2$.

27.4 The ODE $\frac{dx}{dt} = r + x^2$.

27.5 The ODE $\frac{dx}{dt} = rx - x^3$.

27.6 The following system of ODEs as μ changes:

$$\begin{cases} \frac{dx}{dt} = \mu x - \omega y \\ \frac{dy}{dt} = \omega x + \mu y \end{cases}$$

27.7 The Lotka-Volterra model for $0 < a < 1$:


$$\begin{cases} \frac{dx}{dt} = axy - x - 2 + \frac{1}{a} \\ \frac{dy}{dt} = y - \frac{1}{2}xy - 2 + \frac{1}{a} \end{cases}$$

28

PROBLEM

Transport Equation

Consider a river with the water moving at speed v .



We want to model $w(x, t)$, the density of pollutant in the river at the point x and time t .

- 28.1 How much pollutant is there in $[a, b]$?
- 28.2 How does pollutant change in $[a, b]$?
- 28.3 Find a “conservation of pollutant” equation.
- 28.4 Simplify the equation to obtain a PDE for $w(x, t)$.

Hint: Recall the FTC: $f(b) - f(a) = \int_a^b f'(x)dx$.

Method of Characteristics

This is a method to solve a specific type of Partial Differential Equations:

$$u_t(x, t) + f(x, t) \cdot u_x(x, t) = g(x, t).$$

The idea is to interpret the left-hand side as a total derivative with respect to t :

$$\frac{du}{dt}(x(t), t) = u_t(x, t) + f(x, t)u_x(x, t),$$

which implies that


$$\begin{cases} \frac{dx}{dt} = f(x, t) & \text{(moving observer)} \\ \frac{d}{dt}[u(x(t), t)] = g(x(t), t) & \text{(solution for the observer)} \end{cases}$$

The moving observers $x(t)$ are called the *characteristics*. This method allows us to “transform” a PDE into two ODEs.


Video: <https://youtu.be/tNP286WZw3o>

29.1 Find the solution of the transport equation from Exercise 28 using the Method of Characteristics with the initial condition $u(x, 0) = p(x)$.

29.2 Find the solution of the same problem with an accelerating river: $v = 3t^2$.

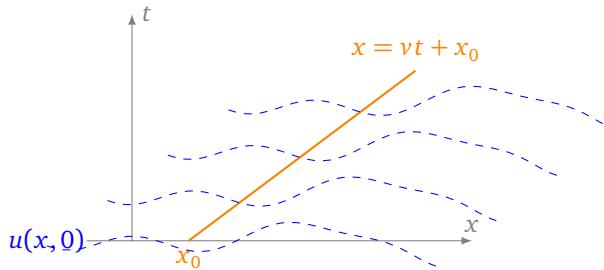

Traffic Flow



We want to model how traffic flows on a one way road.

Let

- $\rho(x, t)$ = density of cars (number of cars per km)
- $\phi(x, t)$ = number of cars passing the point x per hour

And assume:

- (C) Cars are conserved (they are not destroyed nor created on the road)


30.1 What is the total number of cars in the section of the road $x \in [a, b]$ at time t ?

30.2 How does the total number of cars change in $[a, b]$?

30.3 Obtain an equation relating $\rho(x, t)$ and $\phi(x, t)$. The equation should not include a or b .

We need to model how fast cars move on the road: $\phi(x, t)$.

Below we graphed measurements for density and speed at the highway 401¹⁰ together with three different models to fit the data.

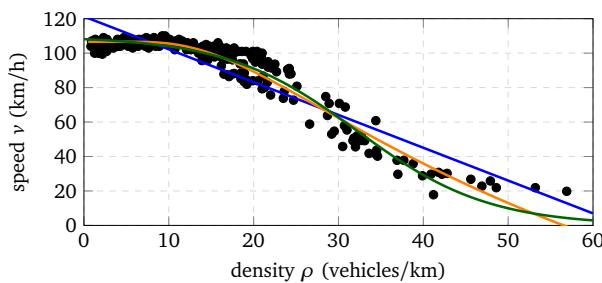

It shows three models:

- **Greenshields model** (linear fit of the data): $v(\rho) = v_{\max} \left(1 - \frac{\rho}{\rho_{\max}} \right)$
- **Newell model**
- **Logistic model**: $v(\rho) = v_{\max} / (1 + e^{-k(\rho - \rho_0)})$

30.4 Using the Greenshields model, find an expression for $\phi(x, t)$.

30.5 Obtain a PDE for $\rho(x, t)$.

31

Let us study two interesting cases.



31.1 What is the initial car density $\rho(x, 0) = \rho_0(x)$ on a one way road with a traffic light that just turned from red to green?



31.2 To model a light turning from green to red, we need to be more creative. What is an initial car density $\rho(x, 0) = \rho_0(x)$ that will guarantee incoming cars have to stop at the red light?

32

Traffic flow scenario

We want to solve the following traffic flow problem:

$$\rho_t + v_{\max} \left(1 - \frac{2\rho}{\rho_{\max}} \right) \rho_x = 0 \quad (\text{Traffic flow model})$$

$$r(x, 0) = f(x) = \begin{cases} \rho_{\min} & \text{for } x < 0 \\ \rho_{\max} & \text{for } x > 0 \end{cases}$$

Consider the following parameters:


- $v_{\max} = 60$
- $\rho_{\max} = 120$
- $\rho_{\min} = 20$

32.1 What are the moving observers (characteristics) $x(t)$ for this problem?

32.2 What is the density $\rho(x, t)$?

¹⁰Data from the paper "Calibrating Steady-State Traffic Stream and Car-Following Models Using Loop Detector Data" by H Rakha and M Arafeh

32.3 Sketch the characteristics and mark the values of ρ on the same graph below.

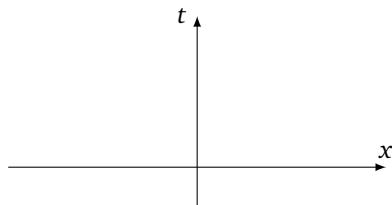


32.4 What is $\rho(0, 2)$?

33

When characteristics intersect, this means that the solution **cannot be continuous**.

So we need to find a **discontinuous** solution.

- Assume that the discontinuity forms a curve $x_s(t)$.

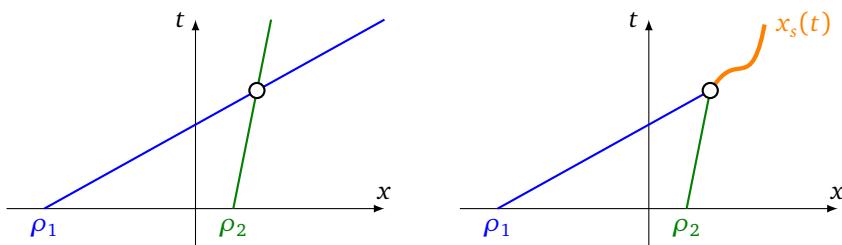

33.1 What should the discontinuity $x_s(t)$ be?

34

We need to step back for a moment and review some Calculus.

Consider a function

$$F(x) = \int_0^z g(x) dx$$

and consider a differentiable function $h(t)$.

34.1 What is $F'(z)$?

34.2 What is $F'(g(t))$? What is $[F(h(t))]'$?

34.3 What is $\left[\int_0^{h(t)} g(x) dx \right]'$? What is $\left[\int_{h(t)}^1 g(x) dx \right]'$?

35

We need to go back to the derivation of the traffic flow model.

We had the following:

$$\frac{d}{dt} \left[\int_a^b \rho(x, t) dx \right] = \phi(a, t) - \phi(b, t)$$

We then took the derivative inside the integral, because we assumed that the density ρ was differentiable (thus continuous). Now we know it is not, so we must break up the interval of integration into “chunks” where ρ is continuous.

We now assume that $\rho(x, t)$ is discontinuous across $x = x_s(t)$.

35.1 Expand the left-hand side of the equation into integrals with continuous integrands.

35.2 We know that $\phi = \phi(\rho)$. Take the limits

$$a \rightarrow (x_s(t))^-, \quad \text{and} \quad b \rightarrow (x_s(t))^+$$

and obtain an ODE for $x_s(t)$.


This ODE is called the **Rankine-Hugoniot shockwave condition**.

- 36.1 Use the Rankine-Hugoniot shockwave condition to find the full solution of Exercise 32.
- 36.2 Compare the solution to the numerical solution using the Lax-Friedrichs method in `traffic_flow_LaxFriedrichs.ipynb`.

Note that to use this method, we wrote the PDE as $\rho_t + (\phi(\rho))_x = 0$ with $\phi(\rho) = v_{\max} \left(1 - \frac{\rho}{\rho_{\max}}\right) \rho$.

Note also that the method is very sensitive to the choice of Δx and Δt : it only works when $\frac{\Delta t}{\Delta x}$ is small enough.

- 36.3 Trace the paths of the cars starting at $x_0 = -10, -5, 0, 2.5$.



- 36.4 What happens when cars slow down gradually? Find the solution for the initial condition

$$r(x, 0) = f(x) = \begin{cases} \rho_{\min} & \text{for } x < -1 \\ \rho_{\max} + (\rho_{\min} - \rho_{\max})x & \text{for } -1 \leq x \leq 0 \\ \rho_{\max} & \text{for } x > 0 \end{cases}$$

- 36.5 How would the model change if there is an on-ramp at $x = 0$?

Probability Models