

PUT endpoint (update book)

The screenshot shows the Postman application window titled "Get data - brinny's Workspace". The interface includes a menu bar (File, Edit, View, Help), a toolbar with navigation and search icons, and a notification banner about plan updates on March 1. The main workspace is divided into several sections:

- Left Sidebar:** Contains icons for collections, environments, history, and a folder view.
- Top Bar:** Shows the current collection "My Collection / Get data", a "PUT" method dropdown, the URL "http://localhost:8082/api/books/1", and a "Send" button.
- Request Body:** The "Body" tab is selected, showing a JSON payload in raw format:

```
1 {
2   "title": "Hunger Games",
3   "author": "Suzanne Collins",
4   "price": 29.99
5 }
```
- Response Section:** Below the request body, the response status is "200 OK" with a time of 3.27 s and a size of 236 B. The response body is also in JSON format:

```
1 {
2   "id": 1,
3   "title": "Hunger Games",
4   "author": "Suzanne Collins",
5   "price": 29.99
6 }
```
- Bottom Bar:** Includes tabs for "Cloud View", "Console", "Terminal", "Runner", "Vault", and other utility icons.

PATCH endpoint (partial update)

The screenshot displays the Postman application window titled "Get data - brinny's Workspace". The interface includes a top menu bar (File, Edit, View, Help), a navigation bar with "Workspaces" and "More" dropdowns, and a status bar at the bottom with icons for Cloud View, Console, Terminal, Runner, Vault, and other utilities.

A blue notification banner at the top states: "We're updating our plans and pricing on March 1. See [our blog](#) for more details."

The main workspace shows a PATCH request configuration:

- Method:** PATCH
- URL:** `http://localhost:8082/api/books/1`
- Environment:** No environment
- Body:** JSON (raw view)

The request body is a JSON object:

```
1 {
2   "title": "Hunger Games",
3   "author": "Suzanne Collins",
4   "price": 15.99
5 }
```


The response section shows a successful status:

- Status:** 200 OK
- Time:** 2.83 s
- Size:** 236 B

The response body is a JSON object:

```
1 {
2   "id": 1,
3   "title": "Hunger Games",
4   "author": "Suzanne Collins",
5   "price": 15.99
6 }
```


DELETE endpoint (remove book)

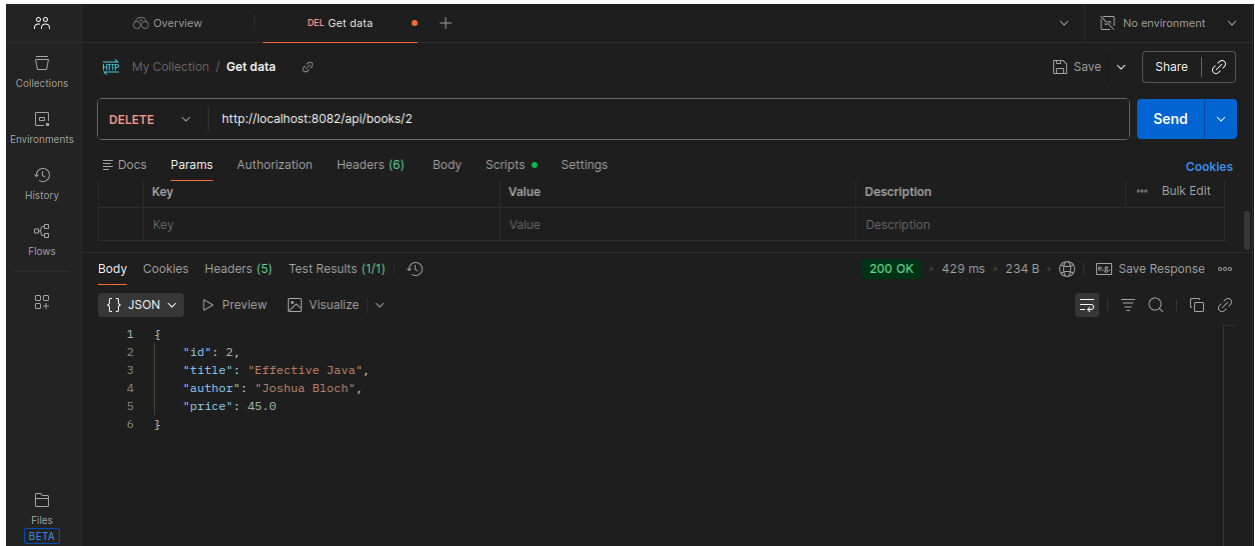

The screenshot shows the Postman interface for a DELETE request. The URL is `http://localhost:8082/api/books/2`. The response status is **200 OK** with a response time of 429 ms and a body size of 234 B. The response body is a JSON object:


```
1 {
2   "id": 2,
3   "title": "Effective Java",
4   "author": "Joshua Bloch",
5   "price": 45.0
6 }
```

GET endpoint with pagination:

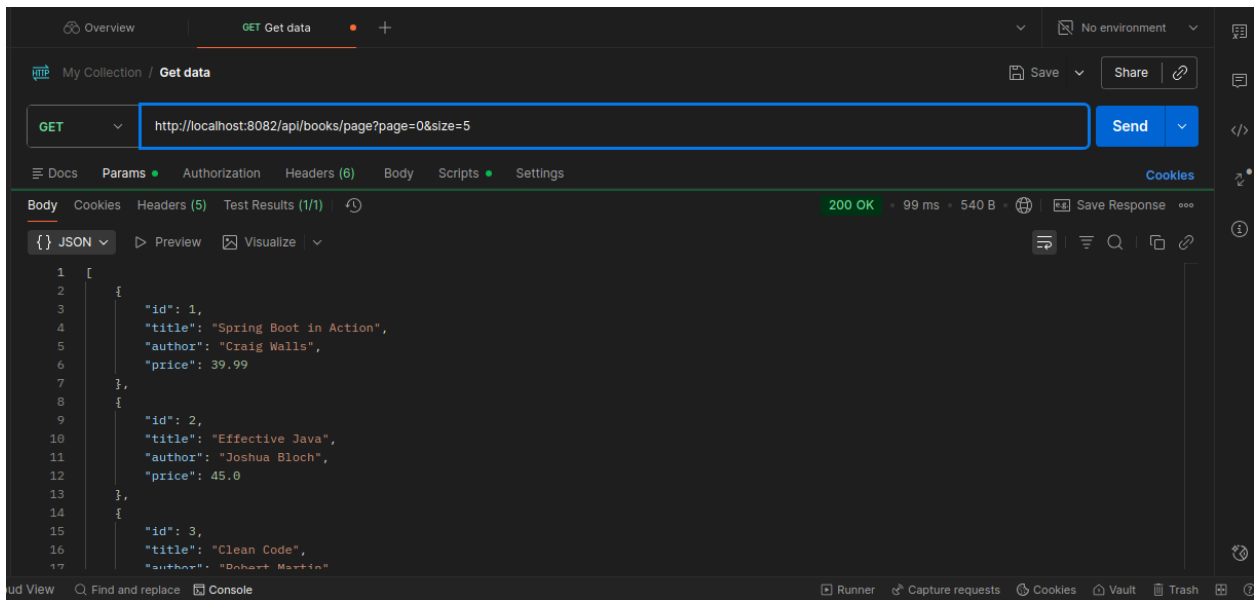

The screenshot shows the Postman interface for a GET request. The URL is `http://localhost:8082/api/books?page=0&size=5`. The response status is **200 OK** with a response time of 99 ms and a body size of 540 B. The response body is a JSON array of 3 books:

```
1 [
2   {
3     "id": 1,
4     "title": "Spring Boot in Action",
5     "author": "Craig Wallis",
6     "price": 39.99
7   },
8   {
9     "id": 2,
10    "title": "Effective Java",
11    "author": "Joshua Bloch",
12    "price": 45.0
13  },
14  {
15    "id": 3,
16    "title": "Clean Code",
17    "author": "Robert Martin"
18  }
19 ]
```

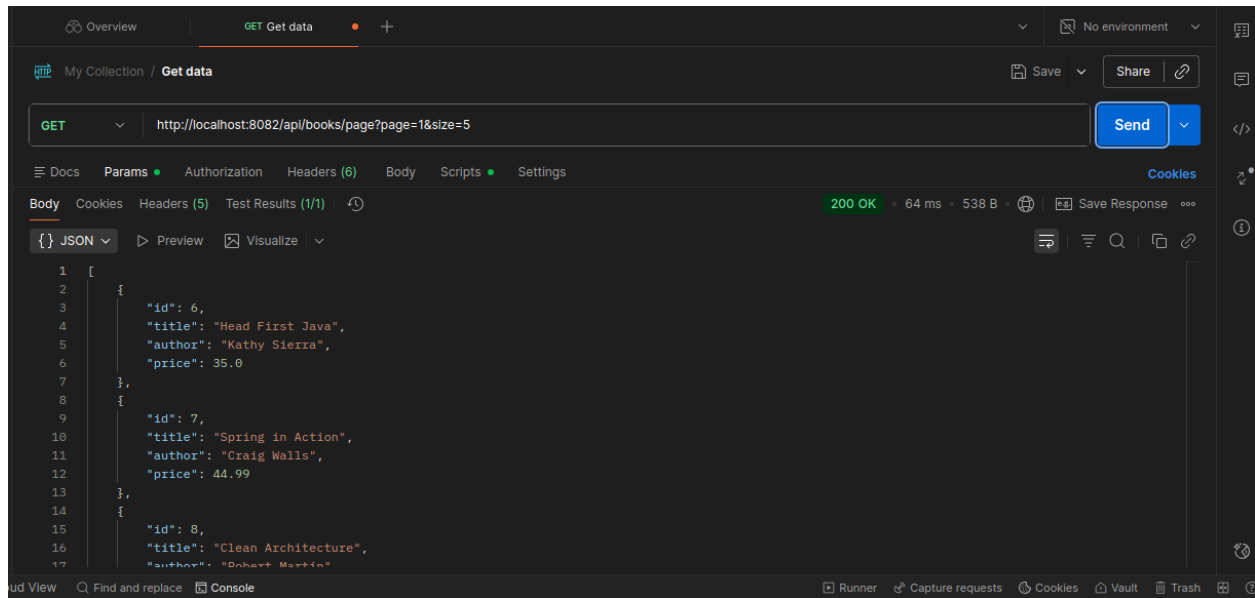

Advanced GET endpoint with filtering, sorting, and pagination combined in the valid order

