




GTC4Lusso USA - Technical specifications - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366

B1.01 Technical specifications

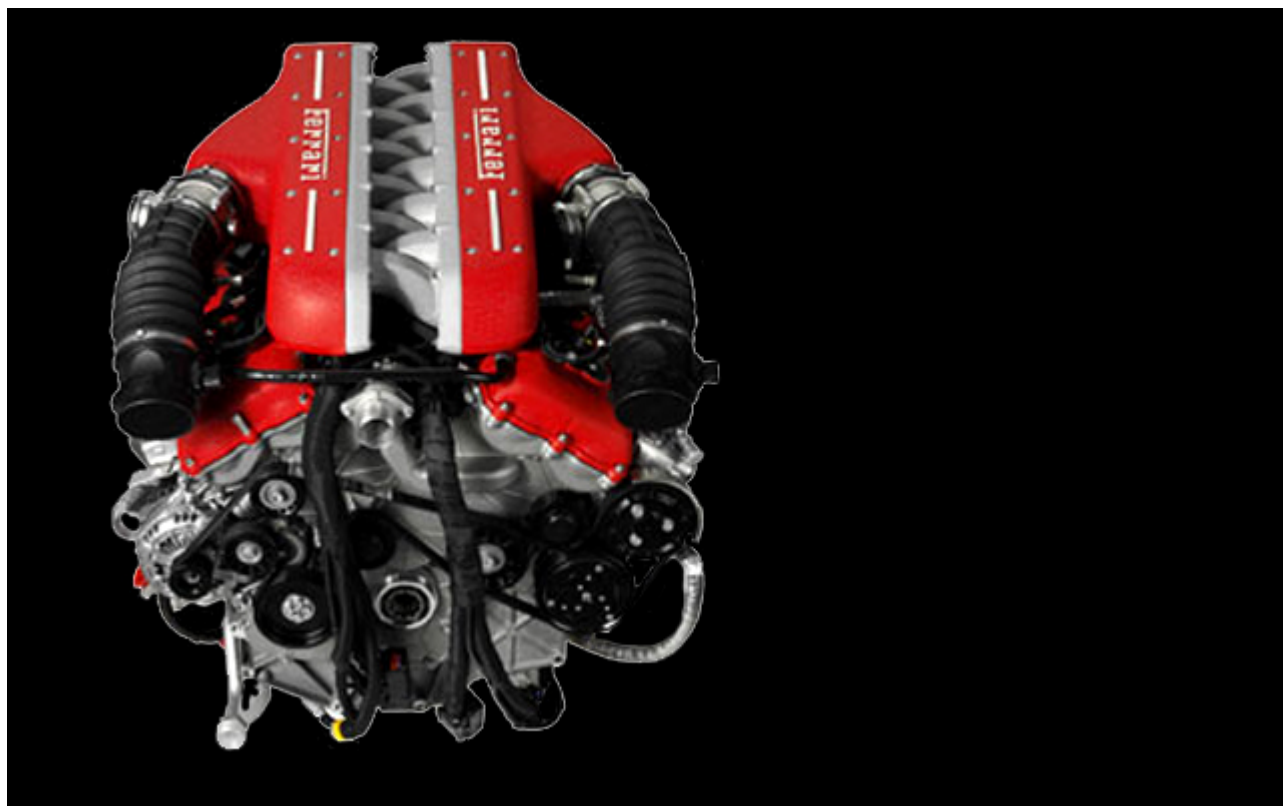

Engine specifications

The engine is a V12 naturally aspirated unit with direct fuel injection situated in a front-mid layout.

High pressure (200 bar) direct injection technology combined with Split Injection Control ensure effective fuel atomisation and perfect air/fuel mixing at engine speeds up to 8000 rpm.

Valve system minimising pumping losses.

The advanced materials used for the pistons, piston rings and camshafts minimise friction.

Ionizing current combustion monitoring system.

Introduction of HELE (High emotions-low emissions) system, with Stop&Start - a system which switches the engine off automatically whenever the vehicle is stationary and restarts it automatically (within 230 ms)

when the driver presses the accelerator pedal again - optimised shift strategies, proportionally controlled radiator fans and fuel pumps, and independently controlled air conditioner compressor.

Cylinder firing sequence

1.12.2.11.4.9.6.7.5.8.3.10

Main engine specifications

Type	F140ED
Number of cylinders	65° V12
Cylinder bore	3.7 in.
Piston stroke	3 in.
Total displacement	382.1 cu.in.
Compression ratio	13.5: 1
Max. engine speed	8250 rpm
Maximum power (Dir. 1999/99/EC)	681 hp
Corresponding rpm	8000 rpm
Maximum torque (Dir. 1999/99/EC)	697 Nm
Corresponding rpm	5750 rpm