

❖ HTML BASIC TAGS

These tags are fundamental building blocks for creating web documents.

1. <!DOCTYPE html>

- Specifies the document type and version of HTML being used.
- Syntax → <!DOCTYPE.html> (HTML5 version)

2. <html>

- The root element that contains all other elements on the page. It includes the <head> and <body> sections.
- Syntax →
 <html>
 Content write here
 </html>

3. <head>

- Contains metadata about the document, such as character encoding, title and links to external resources like stylesheets and scripts.
- Syntax → <head>
 Metadata and links go here
 </head>

4. <title>

- It contains the title of the whole HTML page, and this name is displayed in the browser's title bar or tab.
- Syntax → <title>
 Your Web page name/title
 </title>


5. <body>

- It contains the visible content of the web page, including text, images, links, and more.
- Syntax → <body>
 Content written here will be displayed in the browser

</body>

6. Heading tag

- This tag is used to give titles and subheadings on a web page.
- HTML Provides Six(6) level headings from <h1> to <h6>.
- <h1> is the largest, while <h6> is the smallest.
- Syntax → <h1> Main heading </h1>

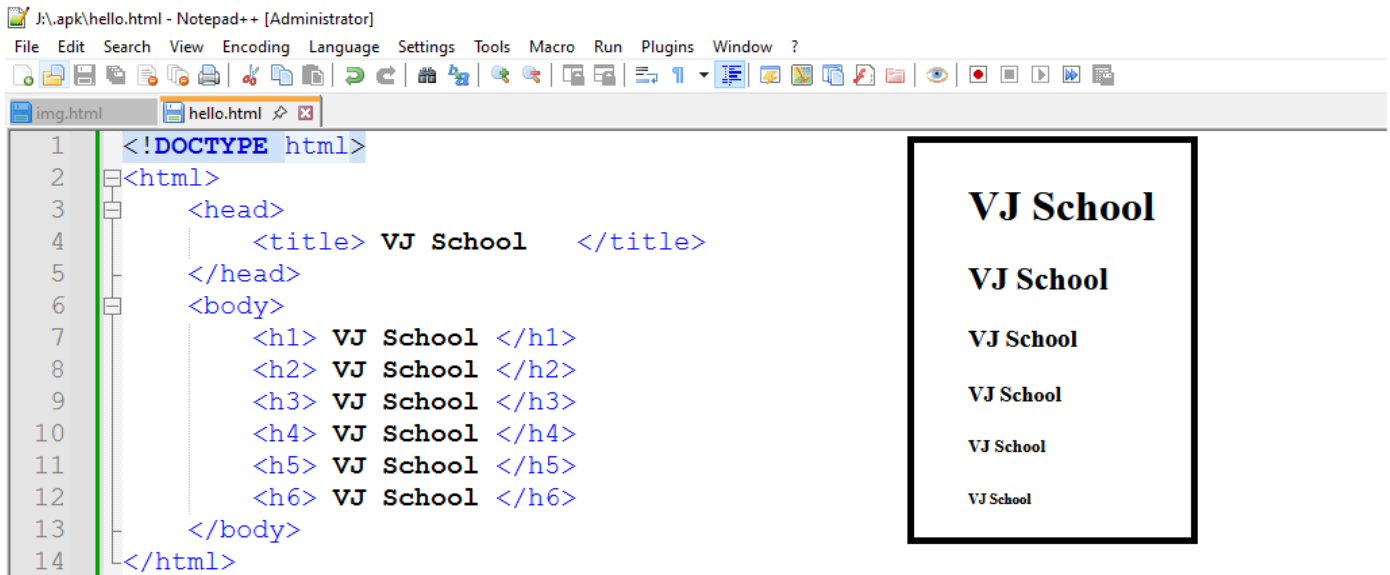

Q1. Create a Webpage using html in which display your name on browser using all heading tag.

7. <p>

- Defines a paragraph of text.
- Syntax → <p> This is a paragraph </p>

```
<!DOCTYPE html>
<html>
  <head>
    <title> VJ School </title>
  </head>
  <body>
    <p> Welcome to VJ School </p>
  </body>
</html>
```

Welcome to VJ School

Q2. Create a Webpage using html in which display your name, school name, state name and class roll no on browser using all <p> tag.

8. Entity

- In HTML, an entity is a special code used to display reserved characters or symbols that cannot be typed directly in normal HTML.

➤ Why HTML Entities are Used

Some characters have special meaning in HTML, like:

- < (used for tags)
- > (used for tags)
- & (used to start an entity)

So we use **entities** to display them correctly on the webpage.

Symbol	Entity Name	Entity number
<	<	<
>	>	>
&	&	&
“	"	"
Space	 	

More symbol search online.... (math symbol, emoji, currency,.....)
preferred website/link →

1. https://www.w3schools.com/html/html_symbols.asp
2. <https://www.toptal.com/designers/htmlarrows/symbols/>

Note

  (space – 4 space contain)
 (space – 1 space contain)
 (space – 2 space contain)

1. ** tag**

- ✓ Represents Strong importance and is typically rendered as bold text.
- ✓ Syntax → `<p> <strong> any text </strong></p>`

2. ** tag**

- ✓ Represents emphasized text and is typically rendered in italics.
- ✓ Syntac → `<p><em> any text </em></p>`

3. **<u>**

- This tag is used to Underlines text.
- Syntax → `<p><u> any text </u></p>`

4. **<s> or <strike>**

- Renders text with a strikethrough.
- Syntax → `<p><s> any text </s></p>` **OR**
`<p><strike> any text </strike></p>`

5. **<sup>**

- Makes text superscript (e.g. – a^2+b^2)
- Syntac → `<p><sup> any text </sup></p>`

6. **<sub>**

- Makes text subscript (e.g – H_2O)
- Syntax → `<p><sub> any text </sub></p>`

7. **<Hr>**

- Used to display a horizontal ruler, used to separate content.
- Syntax → `<hr>` (not close tag)

```
<!DOCTYPE html>
<html>
  <head>
    <title> hira </title>
  </head>
  <body>
    <p> Hello Wolrd !</p> <hr>
    <p> Hello India !</p> <hr> <hr>
    <p> Hello Bihar ! </p><hr>
  </body>
</html>
```

Hello Wolrd !

Hello India !

Hello Bihar !

8. <mark>

- Used to text highlight color
- Syntax → <mark> any text </mark>

```
<p> hello, i am <mark>hira kumar</mark>.</p>
```

hello, i am hira kumar.

9. <bdo>

- Bdo means Bi-directional override.
- It is used to change text direction right to left (rtl) or left to right (ltr)
- Syntax → <bdo dir="rtl"> any text </bdo>

```
<h2><bdo dir="rtl"> HIRA </bdo></h2>
```

ARIH

10. <address>

- Used for address/ contact details in html page.
- Syntax <address> any address </address>

```
<address>
  Devi asthan, hanuman gali <br>
  Biharsharif, Nalanda <br>
  803101
</address>
```

*Devi asthan, hanuman gali
Biharsharif, Nalanda
803101*

Font Style and Size

(Not recommended, use CSS for styling instead)

11. (not recommended)

- Sets font size, color, and face (font name).
- Syntax → <p> any text </p>


12. <big>

- The <big> tag was used to make text **one size larger** than the surrounding/normal text.
- Syntax → <big> any text </big>

13. <small>

- The <small> tag was used to make text **one size smaller** than the surrounding/normal text.
- Syntax → <small> any text </small>

```
index.html > html > body > p
1  <!DOCTYPE html>
2  <html>
3  |   <head>
4  | |   <title> hira </title>
5  | |   </head>
6  | <body>
7  | <p> hello, may i help you ? </p> <hr>
8  | <big> hello, may i help you ? </big> <hr> <hr>
9  | <small>hello, may i help you ? </small><hr>
10 </body>
11 </html>
```

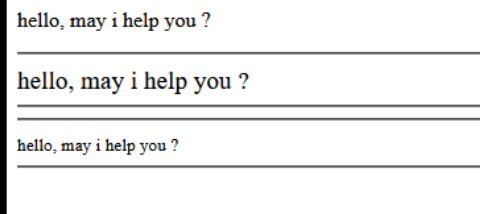

hello, may i help you ?

hello, may i help you ?

hello, may i help you ?

Line Breaks and Whitespace

14.

- Inserts a line break within text (new line).
- Syntax →
 (not close this tag)

```

al > html > body > p
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <title>Heading check</title>
  </head>
  <body>
    <h2>
      <p> <b> Hello hira </b> </p>
      <p> Again, <strong>Hello hira</strong></p>
      <p> <i>May i help you ?</i></p>
      <p> i live in <u>india</u></p>
      <p> Hello <s> World</s> India</p>
    </h2>
    <p> <font size ="5" color="red" face="arial"> (a-b)<sup>2</sup> =(a+b)(a-b) </font></p>
    <p> <font size ="6" color="green" face="arial"> Water formula is = H<sub>2</sub>O</font></p>
    <div style ="text-align:center;"><h1>The End</h1></div>
    <p> Three input device <br> Keyword <br> Mouse <br> Camera</p>
    <p> Q. What is Your name ? <br> My name is Hira kumar</p>
    <p> Q. What is Your name ? <pre> My name is Hira kumar</pre></p>
  </body>
</html>

```

Output

Hello hira

Again, Hello hira

May i help you ?

i live in india

Hello ~~World~~ India

(a-b)² =(a+b)(a-b)

Water formula is = H₂O

The End

Three input device
Keyword
Mouse
Camera

Q. What is Your name ?
My name is Hira kumar

Q. What is Your name ?

```
My name is Hira kumar
```

HIRA KUMAR

15. <pre>

- Performatted text as it is without ignoring spaces & next line.
- Syntax → <pre> any text </pre>

```
index.html > html > body > pre
1  <!DOCTYPE html>
2  <html>
3  <head>
4      <title> hira </title>
5  </head>
6  <body>
7      <p> Computer is an          machine ? </p>
8      <pre> Computer is an          machine ?
9      Collection of program is called          ?
10 </pre>
11 </body>
12 </html>
```

Computer is an machine ?
Computer is an machine ?
Collection of program is called ?

16. <q>

- Defines a short inline quotation.
- Syntax → <q> any text </q>

17. <abbr>

- Represents an abbreviation (संक्षिप्त) or acronym, and you can provide a title attribute for the full text.
- Syntax → <p><abbr> any text </abbr><p>

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <title>Heading check</title>
  </head>
  <body>
    <p> My name is <q>Hira Kumar</q></p>
    <p><abbr title ="Bachelor of Computer Application">BCA</abbr> is amazing !</p>
  </body>
</html>
```

My name is "Hira Kumar".

BCA is amazing !

Home Work

1. Write an HTML program using basic tags to show your name in bold, your city in italic, and align the text to the right.
2. Create an HTML page to display a title, a centered heading, and a paragraph containing bold, italic and underlined text.
3. Write a Simple HTML program (not use JS) to display 1 to 10 counting in horizontal and vertical way.