S.P.M College,Udantpuri

Bachelor Of Computer Application (BCA)

Part -1 (Paper-1) **– Hira Kumar**

Web Development

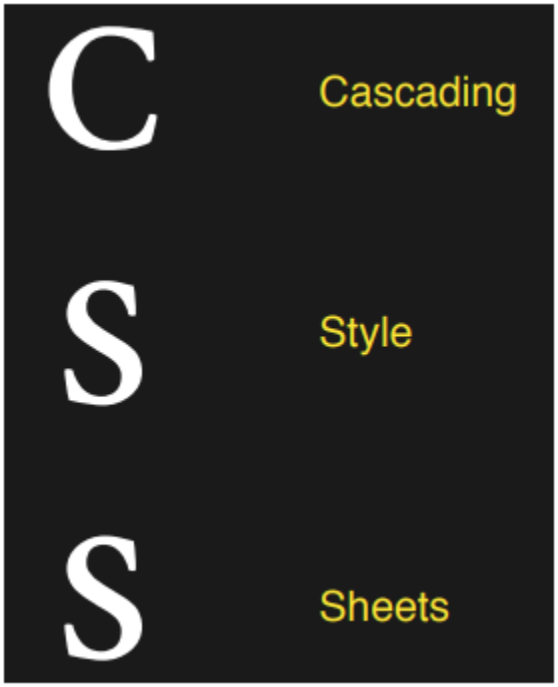

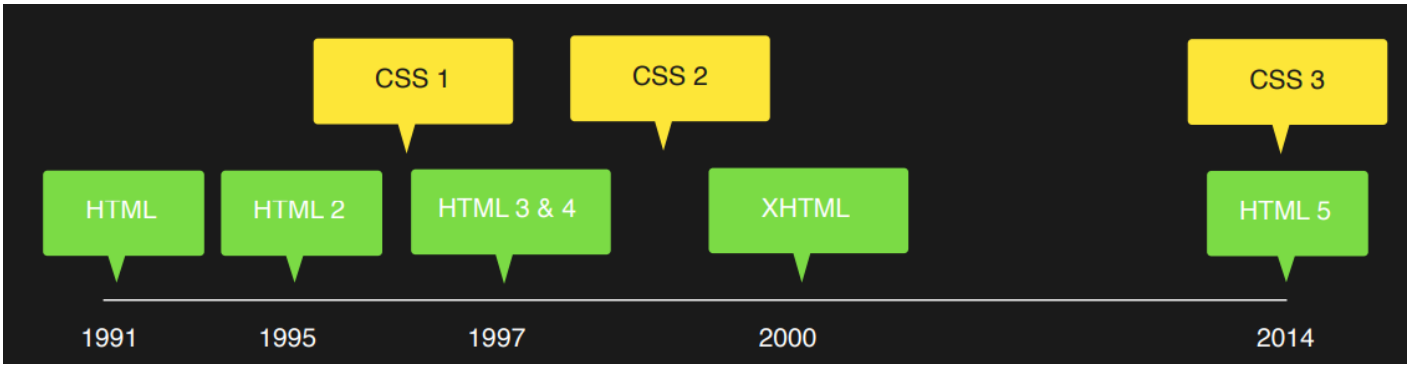

HIRA KUMAR

❖ Transition

- A CSS transition is used to make a smooth change between two states of an element (like hover effect, color change, size change, etc.).
  (CSS में transition का उपयोग किसी property को धीरे-धीरे (smoothly) बदलने के लिए किया जाता है, अचानक change नहीं होता।)
- Syntax – transition: property duration timing-function delay;

🔑 Parts (समझो आसान तरीके से)

Part	Meaning
property	कौन सी property change होगी (color, width, etc.)
duration	कितने समय में change होगा (जैसे 1s, 2s)
timing-function	speed कैसी होगी (ease, linear, etc.)
delay	कितनी देर बाद start होगा

transition-timing-function

Value	Meaning
ease	slow-fast-slow
linear	same speed
ease-in	slow start
ease-out	slow end
ease-in-out	slow-fast-slow
steps	jump effect

यदि box का color धीरे-धीरे change करना चाहते हैं तो - hover में background-color का use करें -

Example -

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-
scale=1.0">
   <title>hira</title>
   <style>
div{
   width:300px;
   height:200px;
   border:2px solid red;
   background-color:blue;
}
.one{
   transition-delay: 1s;
   transition-duration:3s;
   transition-property:width;
   transition-timing-function: linear; /* ease-in , ease-in-out, ease-out*
(slow-fast)*/
}
.one:hover{
   width:600px;
background-color:blue;
}
</style>

</head>
<body>
   <div class="one">1 </div>
   <div class="two">2 </div>
```

```
   <div class="three">3 </div>
</body>
</html>
```

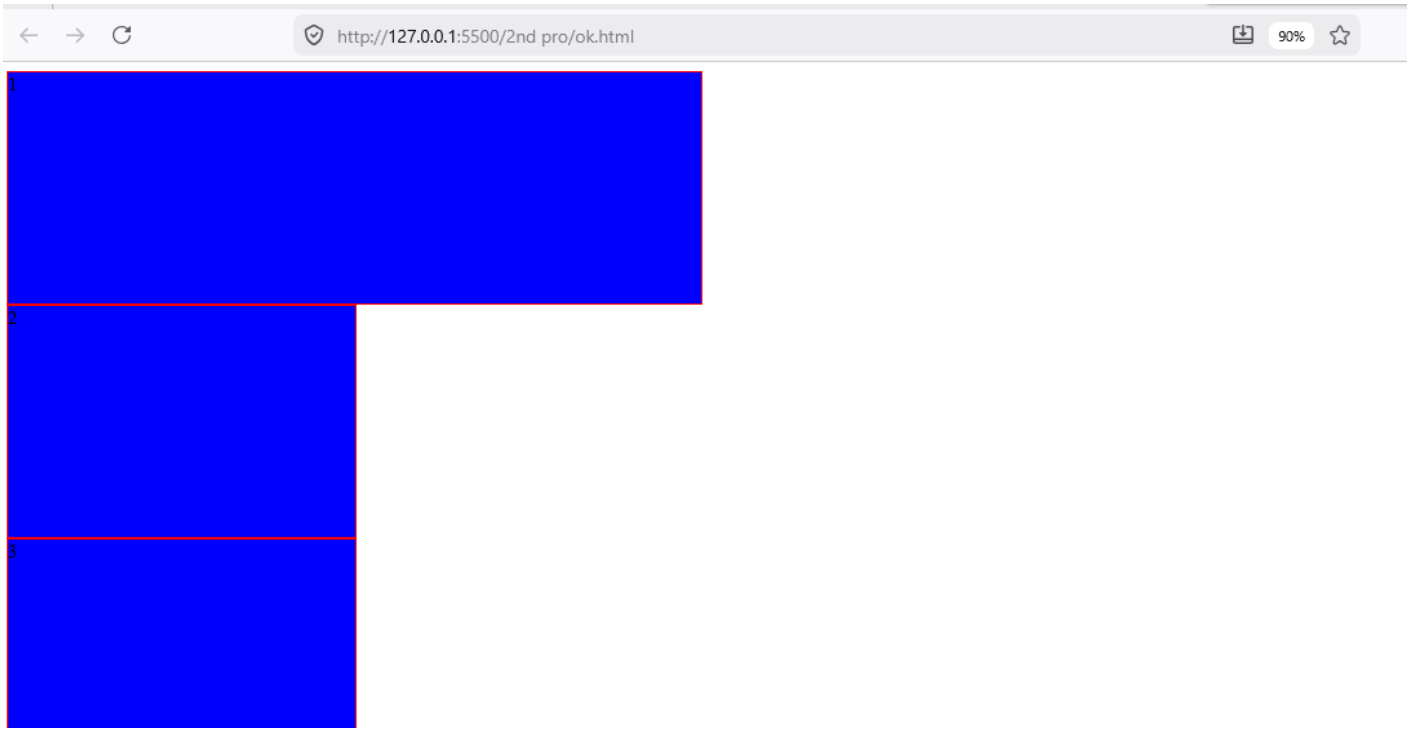

❖ Animation Property

- CSS Animation Property is used to create movement (animation) of elements without using JavaScript. You define animation using **@keyframes** and then control it using animation properties.
- **Syntax –** {

animation: name duration timing-function delay iteration-count direction fill-mode play-state;
}

- Name में – Defines which animation to use
- Iteration-count → How many times animation runs.
    - Value → number (1, 2, 3…) , infinite
- animation-direction → Direction of animation
    - value → normal (default), reverse, alternate, alternate-reverse
- animation-fill-mode → Style before/after animation
    - value → none (default), forwards, backwards, both
- animation-play-state → Start or pause animation
    - value → running, paused

Example –

{
animation: hira 2s ease-in 1s infinite alternate forwards;
}

- **In animation 2 step complete**

i. From (कहाँ से)

ii. To (कहाँ तक)

But now animation have been complete in multi steps.

Use % value

Example →0% to 100% (आपको जहाँ इच्छा हो वहां track करवा सकते हैं)

Example → 0% to 10%, 10% to 40%. 40% to 75%, 75% to 100%

Practical → From to

```
    <style>
        div{
            width:500px;
            height:300px;
            background-color: black;
            margin:100px;
            animation-name:hira;
            animation-delay:1s;
            animation-duration:4s;
            animation-iteration-count: infinite;
        }
        @keyframes hira{
            from{
background-color: red;
            }
            to{
background-color: yellow;
            }
        }
    </style>
</head>
<body>
    <div>

    </div>
</body>
```

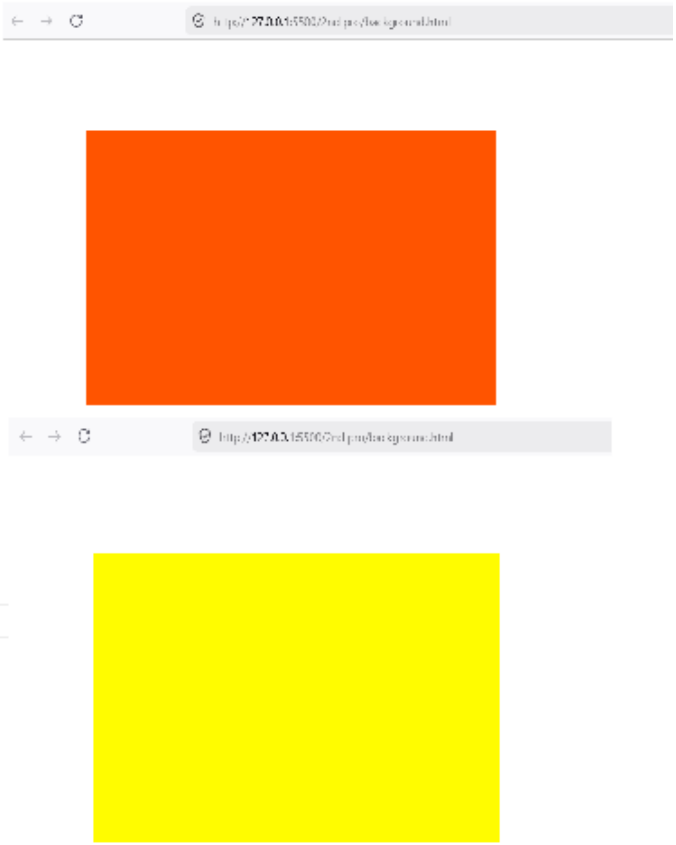

Practical → use%

```
        }
        @keyframes hira{
        0%{
            background-color: orange;
        }
        25%{
background-color: blue;
        }
        50%{
background-color: green;
        }
        75%{
background-color: pink;
        }
        100%{
background-color: red;
        }
        }

    </style>
```

Example – Move box by animation

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width,
initial-scale=1.0">
   <title>Document</title>
   <style>
      .main{
         width:80vw;
         height:80vh;
         background-color:black;
         margin:100px;
         animation-name:hira;
         animation-delay:1s;
```

```
        animation-duration:4s;
        animation-iteration-count: infinite;
      }
      @keyframes bihar{
      0%{
        background-color:orange;
        transform: translate(0,0);
      }
      25%{
background-color:blue;
 transform: translate(900px,0);
      }
      50%{
background-color:green;
transform: translate(900px,320px);
      }
      75%{
background-color:pink;
transform: translate(0px,320px);
      }
      100%{
background-color:red;
transform: translate(0px,0px);
      }
      }
       .hira{
        width:200px;
        height:200px;
        background-color:yellow;
```

```
        animation-name:bihar;
        animation-delay:1s;
        animation-duration:4s;
        animation-iteration-count: infinite;
      }
  </style>
</head>
<body >
  <div class="main">
<div class="hira">

</div>
  </div>
</body>
</html>
```

```
<head>
    <style>
        .main{
            width:80vw;
            height:80vh;
            background-color: black;
            margin:100px;
            animation-name:hira;
            animation-delay:1s;
            animation-duration:4s;
            animation-iteration-count: infinite;
        }
        @keyframes bihar{
        0%{
            background-color: orange;
            transform: translate(0,0);
        }
        25%{
background-color: blue;
  transform: translate(900px,0);
        }
        50%{
background-color: green;
transform: translate(900px,320px);
        }
        75%{
background-color: pink;
transform: translate(0px,320px);
        }
        100%{
background-color: red;
transform: translate(0px,0px);
        }
        }
          .hira{
            width:200px;
            height:200px;
            background-color: yellow;
             animation-name:bihar;
            animation-delay:1s;
            animation-duration:4s;
            animation-iteration-count: infinite;
          }
    </style>
</head>
<body >
    <div class="main">
<div class="hira">
```

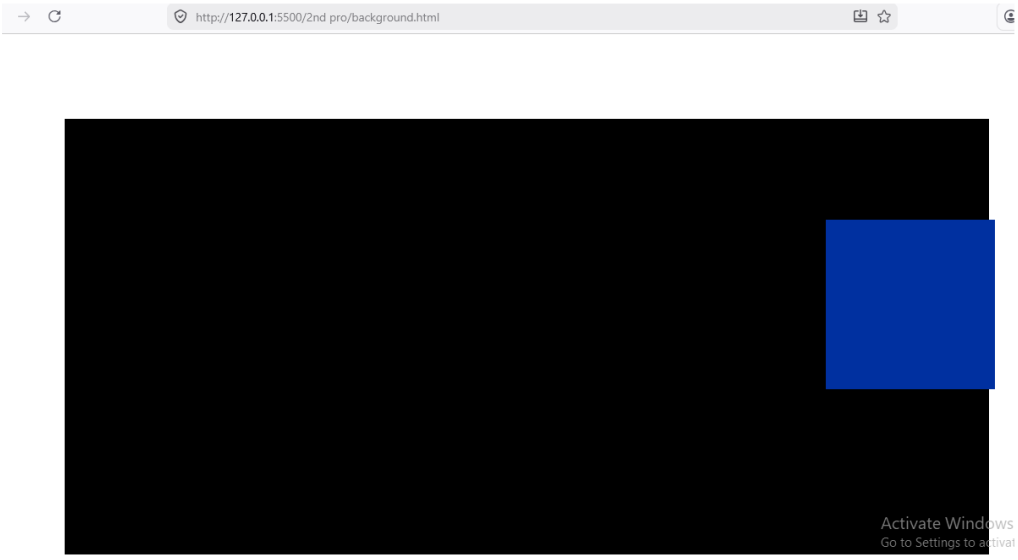

HIRA KUMAR