# S.P.M College,Udantpuri

Bachelor Of Computer Application (BCA)

Part -1 (Paper-1) **– Hira Kumar**

# Web Development

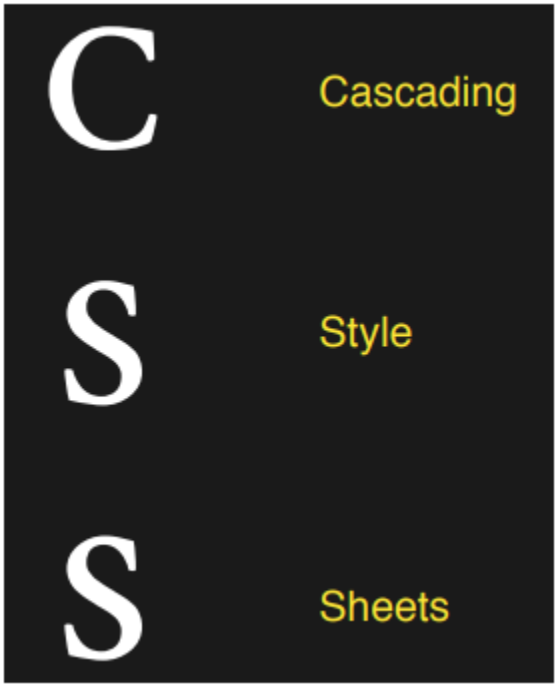


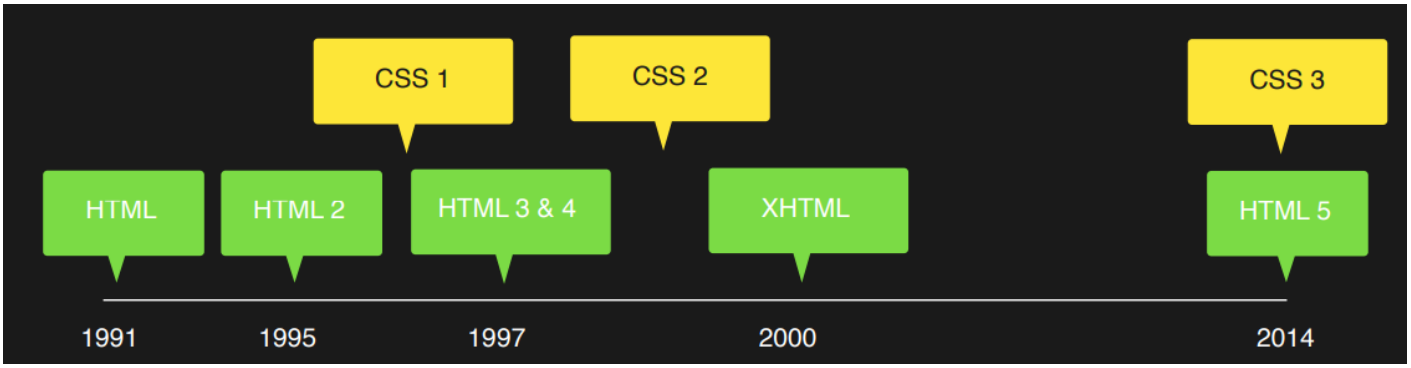


**HIRA KUMAR**

# ❖ Text Property

The text property in CSS is not just one property—it refers to a group of properties used to control the appearance and formatting of text on a web page.

| 1.Text-align | | |
|---|---|---|
| **Value** | **Example** | **Meaning/Use** |
| Left | “text-align:left” | Text in left side |
| Right | “text-align:right” | Text in right side |
| Center | “text-align:center” | Text in Center |
| Justify | “text-align:justify” | Text in Justify |

```html
<body>
  <div>
<p style="text-align:left;"> Left </p>
  </div>
  <div>
<p style="text-align:right;"> Right  </p>
  </div>
  <div>
<p style="text-align:center;"> Center</p>
  </div>
    <div>
<p style="text-align:justify;"> Lorem ipsum dolor sit amet consect
sed! ?</p>
  </div>
</body>
</html>
```

http://127.0.0.1:5500/index.html

Left

Right

Center

Lorem ipsum dolor sit amet consectetur adipisicing elit. Fugiat, sed! ?

## 2.Text-decoration line

It is used to add or remove lines on text.

| Value | Example | Meaning/Use |
|---|---|---|
| Line-through | “text- decoration-line:line-through” | ~~Hira~~ |
| Underline | “text- decoration-line:underline” | Hira |
| Overline | “text- decoration-line:overline” | Hira |
| None | “text- decoration-line:none” | Hira |

## 3.Text-decoration-style

This is used to change the style of the text decoration line.

| Value | Example | Meaning/Use |
|---|---|---|
| Dashed | “text-decoration-style:dashed” | Hira |
| Dotted | “text- decoration-style:dotted” | Hira |
| Double | “text- decoration-style:double” | Hira |
| Line-through | “text- decoration-style:line-through” | ~~Hira~~ |
| Solid | “text- decoration-style:solid” | Hira |
| Wavy | “text- decoration-style:wavy” | Hira |
| Overline | “text- decoration-style:overline” | Hira |
| none | “text- decoration-style:none” | Hira |

## 4.Text-decoration-color

This is used to change the color of the text-decoration-line.

| Value | Example | Meaning/Use |
|---|---|---|
| red | “text-decoration-color:red” | |

| 5.Text-decoration-thickness | | |
|---|---|---|
| It controls the thickness of the text-decoration-line. | | |
| Value | Example | Meaning/Use |
| 2px | “text-decoration-thickness:2px” | |
| Auto | “text-decoration-thickness:auto” | Browser automatic set |
| From-font | “text-decoration-thickness:from-font” | a/c to font design |

| 6.Text-decoration-skip-ink | | |
|---|---|---|
| This is used to skip the text-decoration-line at some place. | | |
| **Value** | **Example** | **Meaning/Use** |
| Ink | “text-decoration-skip-ink:auto”<br>(तभी effect दिखेगा जब text में नीचे letters जैसे g,j,p,q,y हो) | Skip parts inside letters |

Note :- text-decoration property तभी अप्लाई होगी जब अपने text-decoration-line लिखे होंगे |

```
p{
 font-size:30px;
 margin-left:50px;
 text-decoration-line:underline;
 text-decoration-style:wavy;
 text-decoration-thickness:2px;
 text-decoration-color: red;
 text-decoration-skip-ink:auto;
}
</style>
</head>
<body>
  <p> CSS = cascading style sheet </p>
</body>
```

http://127.0.0.1:5500/index.html

CSS = cascading style sheet

| 7.Text-transform | | |
|---|---|---|
| This is used to change the case (capital,small,upper,..) | | |
| Value | Example | Meaning/Use |
| None | “text-transform : none” | Nothing |
| capitalize | “text-transform:capitalize” | Hira |
| uppercase | “text-transform:uppercase” | HIRA |
| lowercase | “text-transform:lowercase” | hira |

```html
<body>
  <p style="text-transform:uppercase"> CSS = cascading style sheet </p>
</body>
```

http://127.0.0.1:5500/index.html

CSS = CASCADING STYLE SHEET