S.P.M College,Udantpuri

Bachelor Of Computer Application (BCA)

Part -1 (Paper-1) **– Hira Kumar**

Web Development

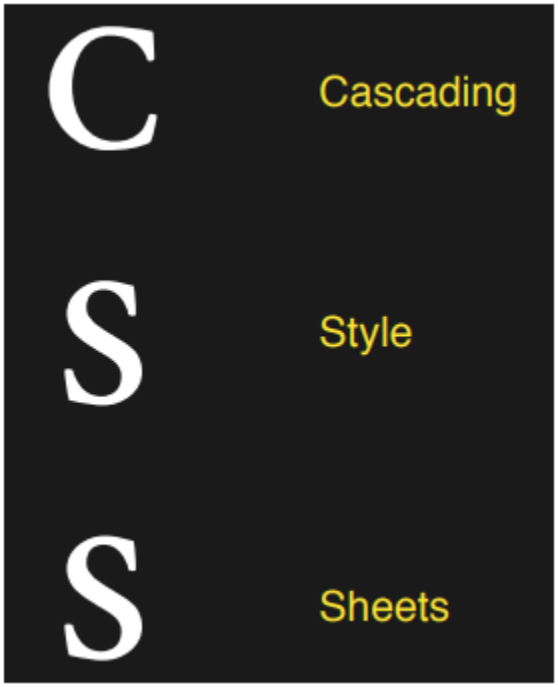

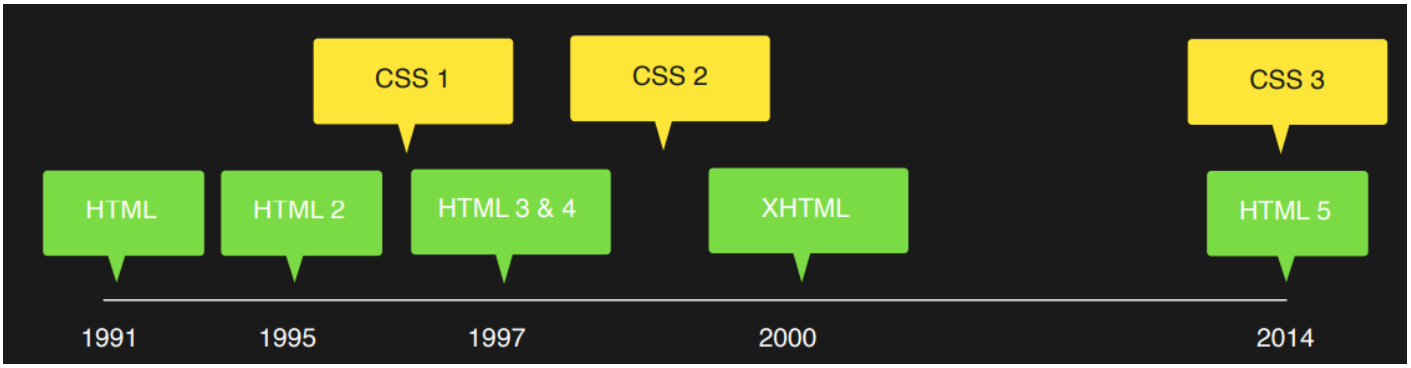

HIRA KUMAR

❖ Display Property

- The display property in CSS is used to define how an HTML element is displayed on a web page.
- It controls the layout behavior of elements (whether they appear in a line, in a block, hidden, etc.).
- Syntax –

```
selector{
   display: value;
}
```

- Example –

```
p{
  display: block;
}
```

❖ Common Values of Display Property

1. Block

- A block element always starts on a new line and takes the full width available.
- Name of block element -

<address>,<article>, <aside>,<blockquote>, <canvas>,<dd>, ,<dl>, <dt>,<fieldset>,<figcaption>,<figure>,<footer>,<form>,<h1> to <h6>, <header>,<hr>,<li>,<main>,<nav>,<noscript>,<ol>,<p>,<pre>,<section>, <table>,<tfoot>,<ul>,<video>

- Example -

```
div{
      Display:block;        /* By default */
}
```

Note :- block element में display:block लिखना जरुरी नहीं हैं, by default वह एक block को capture करता ही है |

```html
    <style>
        p{
            background-color: red;
            /* display:block;*/
        }
        div{
            background-color:  blue;
            color: white;
            font-size:25px;
            width:150px;
            height:150px;
            display:block;
        }

    </style>
</head>
<body>
    <p> Hello India !</p>
    <div> Hello world!</div>
</body>
```

2. inline

- An inline element does not start on a new line and only takes the width of its content.
- Name of inline element –
- <a>,<abbr>,<b>,<bdo>,
,<button>,<cite>,<code>,<dfn>,,<i>,<img>,<input>,<label>,<map>,<mark>,<object>,<output>,<q>,<samp>,<script>,<select>,<small>,,,<sub>,<sup>,<textarea>,<time>,<tt>,<var>
- Examples – {

  Display:inline;

  }

Note :-

(i) inline में width एवं height property काम नहीं करता हैं |

(ii) inline को block में convert कर सकते हैं display property से |

(iii) block को भी inline में convert कर सकते हैं display property से |

```html
    <style>
        p{
            background-color: red;
            font-size:40px;
             /* display:block;*/}
        a{
            background-color: orange;
            font-size:40px;}
.p1{
    background-color: blue;
    color: white;
    display:inline;}
    </style>
</head>
<body>
  <a> Hello Hira </a>
  <p> Hello Bihar </p>
  <p class="p1"> Hello India </p>
```

http://127.0.0.1:5500/shop.html

Hello Hira

Hello Bihar

Hello India

```html
    <style>
        .c{
          background-color: red;
          width: 200px;
          height : 200px;
          font-size : 60px;
          color : white;
          margin :5px;
          border: 5px solid black;

           display: inline;
        }

    </style>
</head>
<body>
  <div class="c"> Hello Hira !</div>
  <div class="c"> hello hira !</div>
</body>
</html>
```

http://127.0.0.1:5500/index.html

Hello Hira ! hello hira !

3. inline-block

inline-block is a combination of inline and block.
In inline-block, element will be show in inline but work in block.
Appears in the same line, But different width and height can be applied.

Example – {
Display:inline-block;
}

```
    <style>
        a{
            background-color: orange;
            font-size:40px;
            width:300px;
            height:150px;
            display:inline-block;
            }
    </style>
</head>
<body>
    <a> Hello Hira </a>
```

(h2 दिख रहा हैं inline but काम कर रहा हैं block की तरह)

```
    <style>
        p{
            background-color: orange;
            font-size:40px;}
        h1{
            background-color: blue;
            color: white;
            display:none;}
        h2{
            background-color: green;
            color: white;
            display:inline-block;}
    </style>
</head>
<body>
    <p> Hello Hira </p>
    <h1> Hello India </h1>
    <h2> Hello Bihar </h2>
    <h3> Hello Nalanda</h3>
```

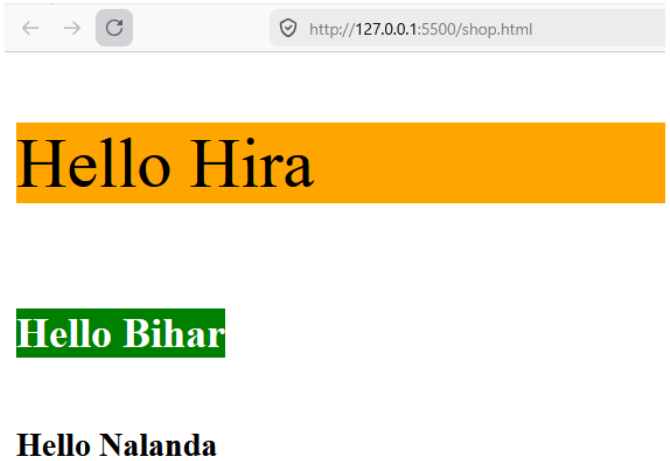


```
    <style>
        .c{
            height : 200px;
            font-size : 60px;
            color : white;
            margin :5px;
            border: 5px solid black;
             display: inline-block;
        }
        .d{
            background-color: red;
            width: 200px;
            height : 200px;
            font-size : 60px;
            color : white;
            margin :5px;
            border: 5px solid black;
             display: inline;
        }
```

4. None

- display: none is used to hide an element completely.
- Element does not appear.
- Element does not take any space.
- Example: {

  Display:none;

  }

```html
    <style>
        p{
            background-color: orange;
            font-size:40px;}
        h1{
            background-color: blue;
            color: white;
            display:none;}
        h2{
            background-color: green;
            color: white;
            display:inline-block;}
    </style>
</head>
<body>
    <p> Hello Hira </p>
    <h1> Hello India </h1>
    <h2> Hello Bihar </h2>
    <h3> Hello Nalanda</h3>
```

http://127.0.0.1:5500/shop.html

Hello Hira

Hello Bihar

Hello Nalanda

OR

```html
    <style>
        a{
            background-color: orange;
            font-size:40px;}
        span{
            background-color: blue;
            color: white;
            font-size:40px;
            display:none;}

    </style>
</head>
<body>
    <a> Hello Hira </a> <br>
    <span> Hello India </span> <br>
    <a> Hello Bihar </a>
```

http://127.0.0.1:5500/shop.html

Hello Hira

Hello Bihar

```html
<style>
    .c{
        background-color: red;
        width: 200px;
        height : 200px;
        font-size : 60px;
        color : white;
        margin :5px;
        border: 5px solid black;
         display: none;
    }
    .d{
        background-color: red;
        width: 200px;
        height : 200px;
        font-size : 60px;
        color : white;
        margin :5px;
        border: 5px solid black;
         display: inline;
    }
```

http://127.0.0.1:5500/index.html

hello hira !

HIRA KUMAR