S.P.M College,Udantpuri

Bachelor Of Computer Application (BCA)

Part -1 (Paper-1) **– Hira Kumar**

Web Development

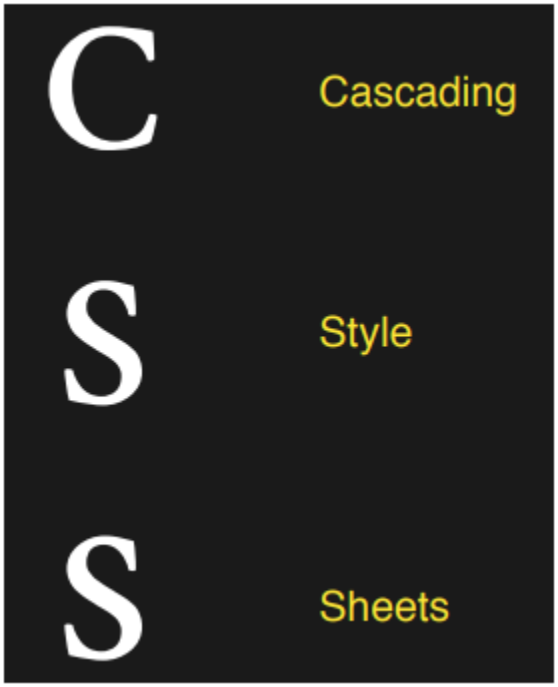

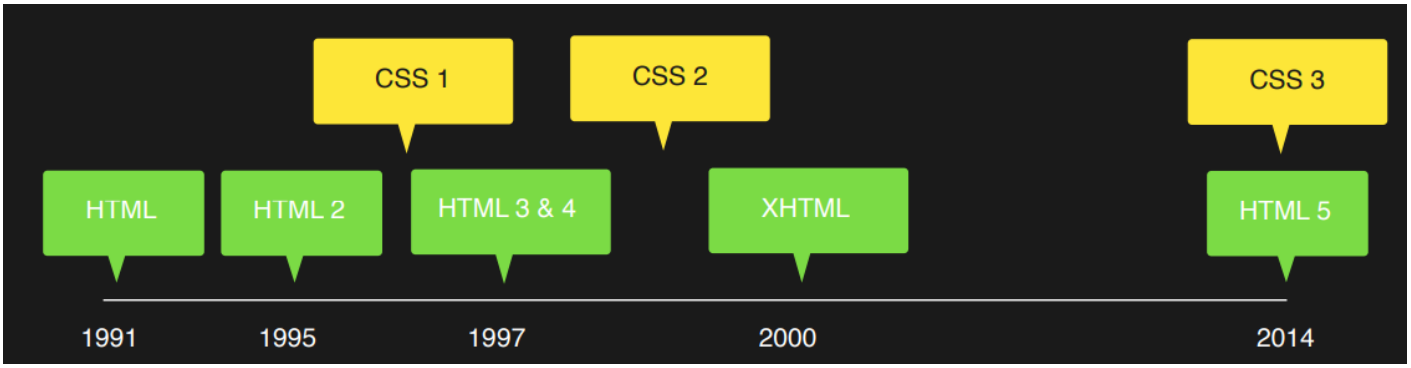

HIRA KUMAR

❖ Navigation menu (nav menu)

A navigation menu is a list of links on a website that helps users move (navigate) from one page to another.

Example –

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width,
initial-scale=1.0">
   <title>Document</title>
   <style>
      *{
         margin:0%;
         padding:0%;
      }
      .main{
background-color: white;
border:2px solid black;
margin:auto;
width:90vw;
      }
   .main li{
      display:inline-block;
      padding:20px;
      position: relative;
   }
```

```
    .main li:hover{
        background-color:yellow;
        font-weight:bold;
    }
    .dropdown{
        position:absolute;
        top:100%;
        background-color:pink;
        display:none;
    }
    .dropdown li{
        display:block;
    }
    .dropdown li:hover{
        background-color:black;
        color:white;
    }
   /* .dropdown:hower{
        display:block;
    }*/
    .main li:hover .dropdown{
display:block;
    }
    </style>
</head>
<body>

        <ul class="main">
            <li>Home</li>
```

```
        <li>admission
            <ul class="dropdown">
                <li>bsc</li>
                <li>ba</li>
                <li>bcom</li>
                <li>bca</li>
            </ul>
        </li>
        <li>result</li>
        <li>admit card</li>
        <li>syllabus</li>

    </ul>

</body>
</html>
```

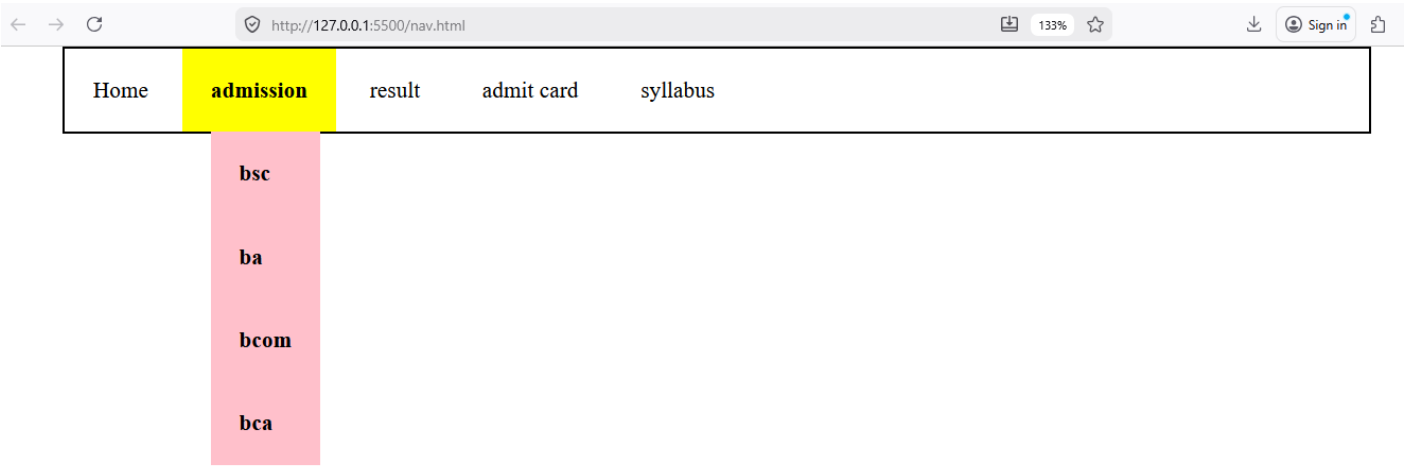

Transition

A **CSS transition** is used to make a smooth change between two states of an element (like hover effect, color change, size change, etc.).

(CSS में transition का उपयोग किसी property को धीरे-धीरे (smoothly) बदलने के लिए किया जाता है, अचानक change नहीं होता।)

Syntax –

transition: property duration timing-function delay;

🔑 Parts (समझो आसान तरीके से)

Part	Meaning
property	कौन सी property change होगी (color, width, etc.)
duration	कितने समय में change होगा (जैसे 1s, 2s)
timing-function	speed कैसी होगी (ease, linear, etc.)
delay	कितनी देर बाद start होगा

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width,
initial-scale=1.0">
   <title>hira</title>
   <style>
div{
   width:300px;
   height:200px;
   border:2px solid red;
   background-color:blue;
}
.one{
   transition-delay: 1s;
```
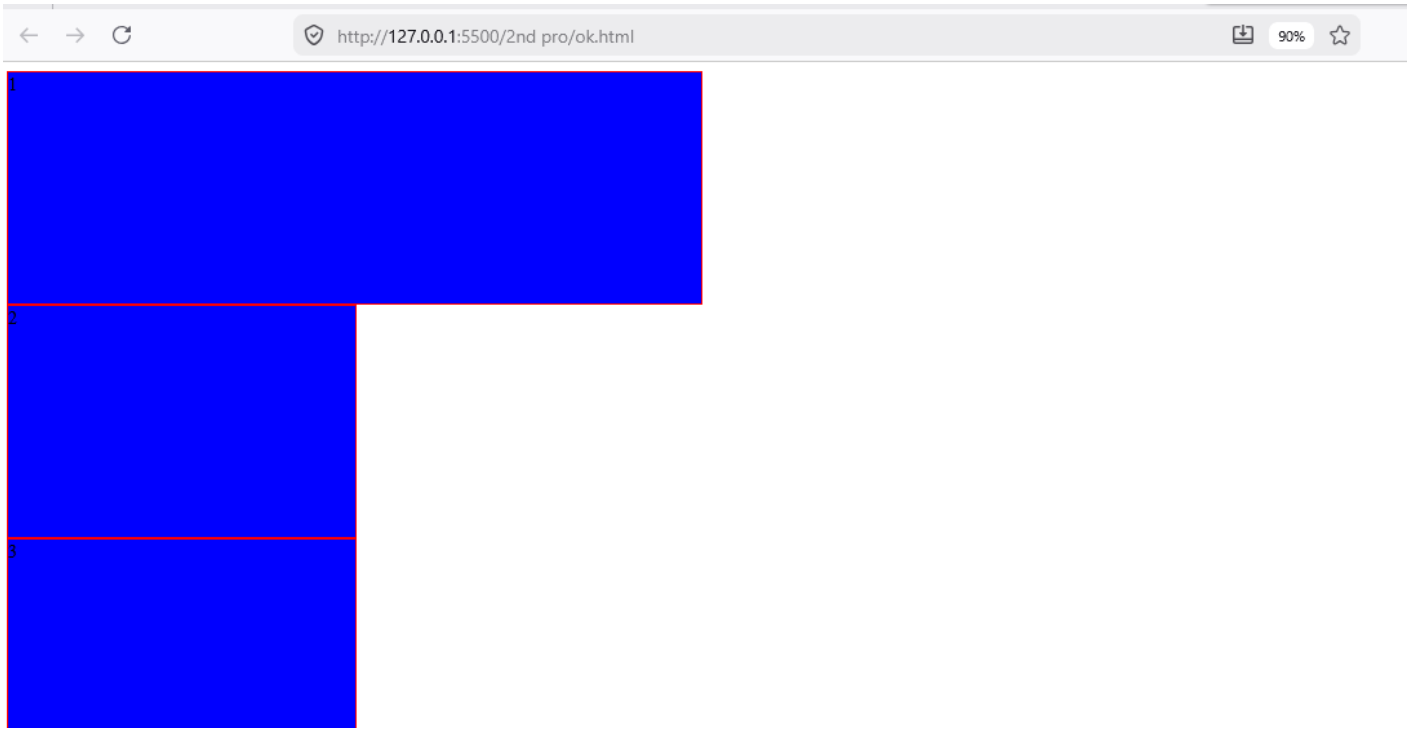
```
    transition-duration:3s;
    transition-property:width;
    transition-timing-function: linear; /* ease-in , ease-in-out,
ease-out* (slow-fast)*/
}
.one:hover{
    width:600px;
}
</style>

</head>
<body>
    <div class="one">1 </div>
    <div class="two">2 </div>
    <div class="three">3 </div>
</body>
</html>
```