


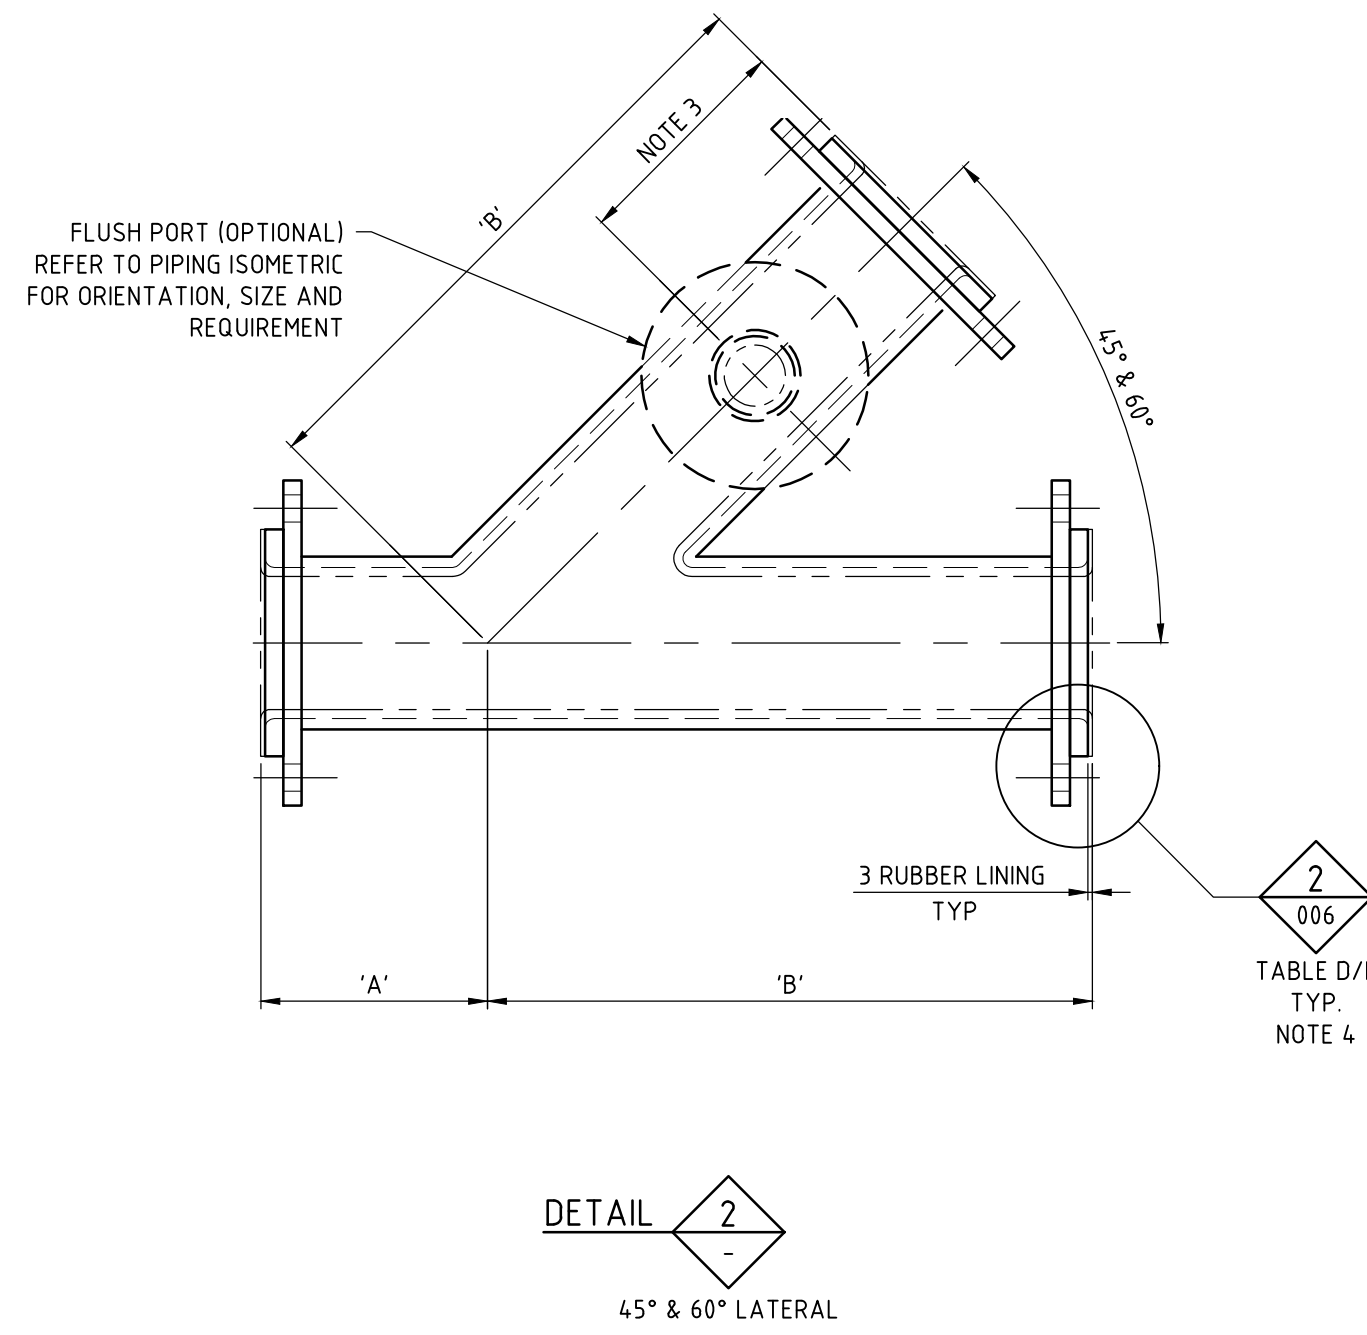
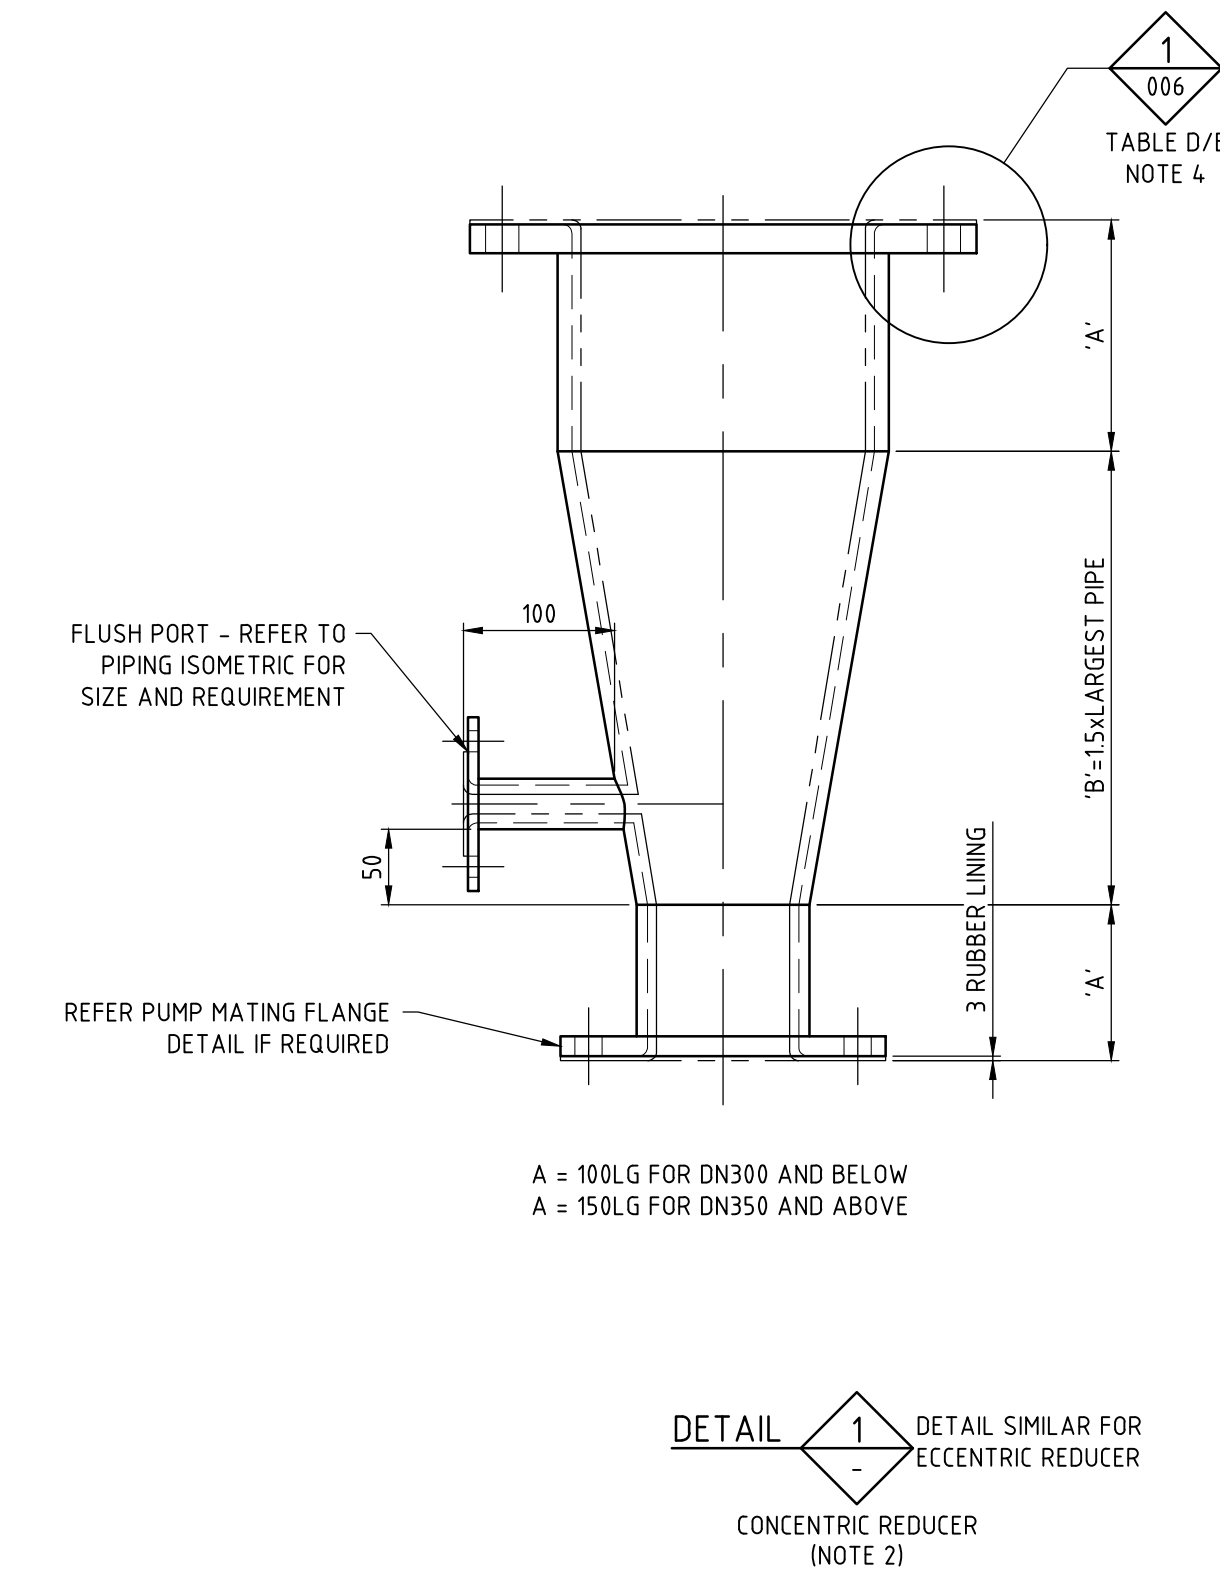
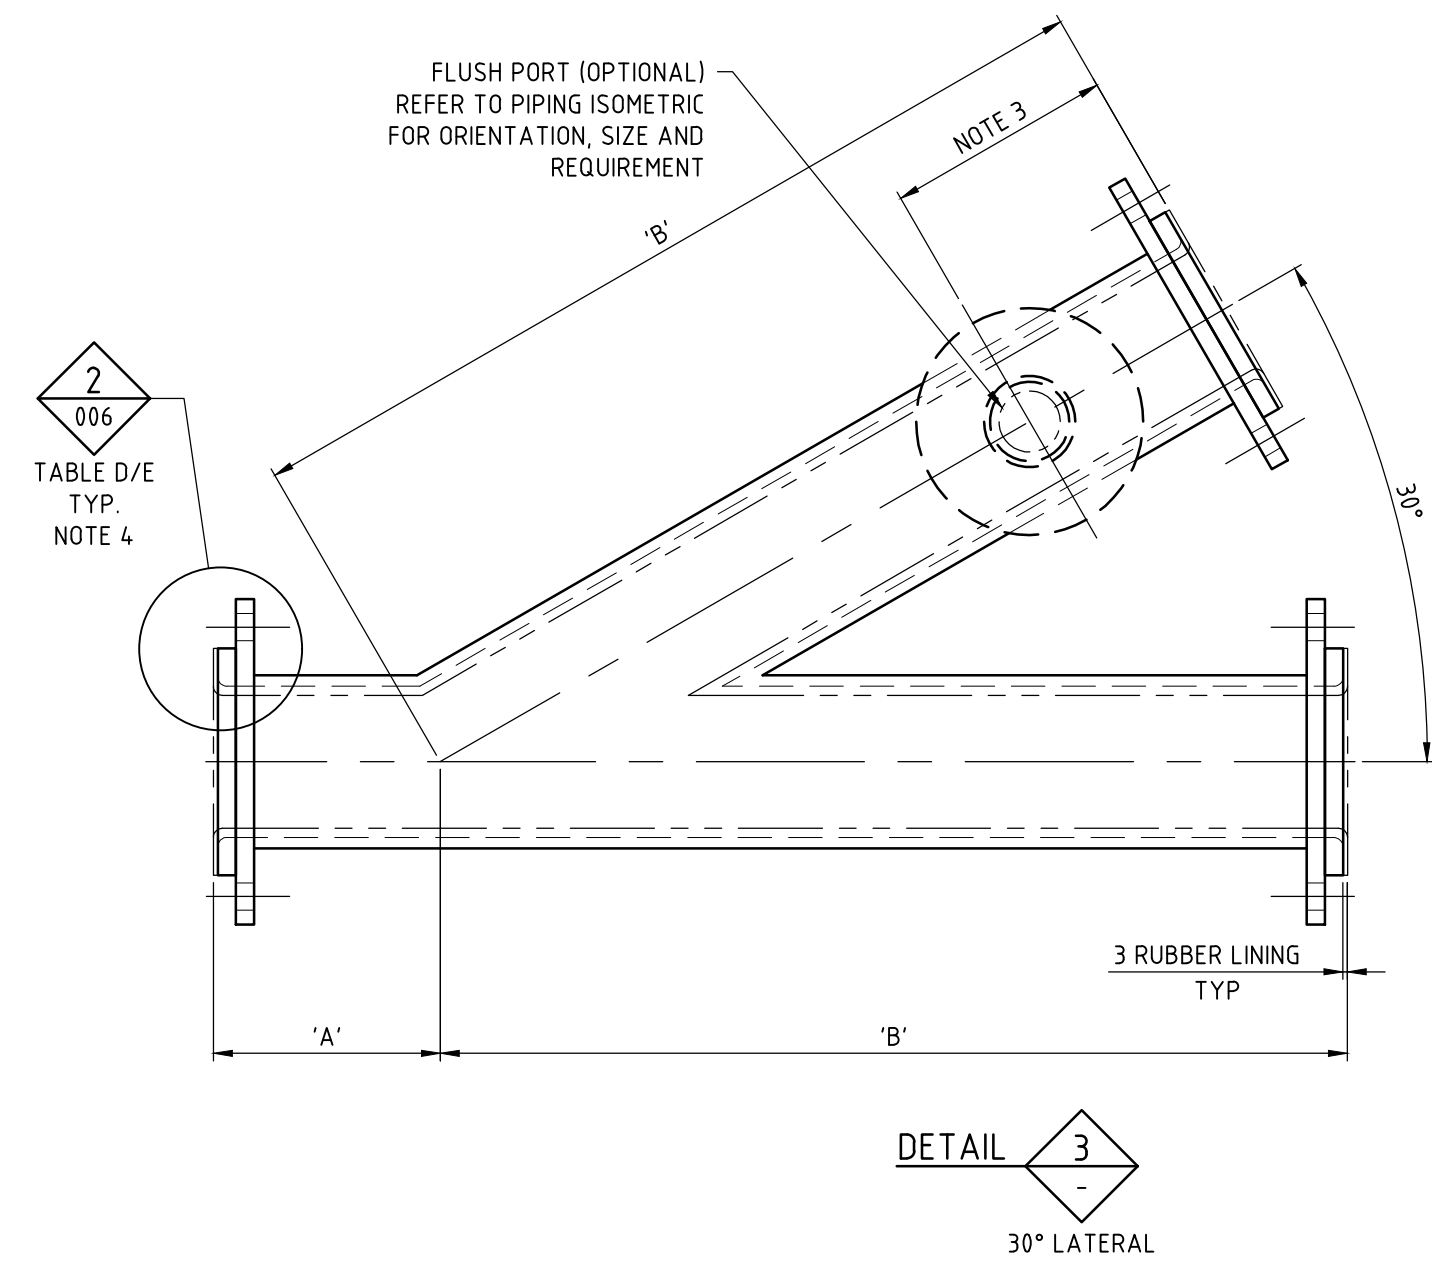
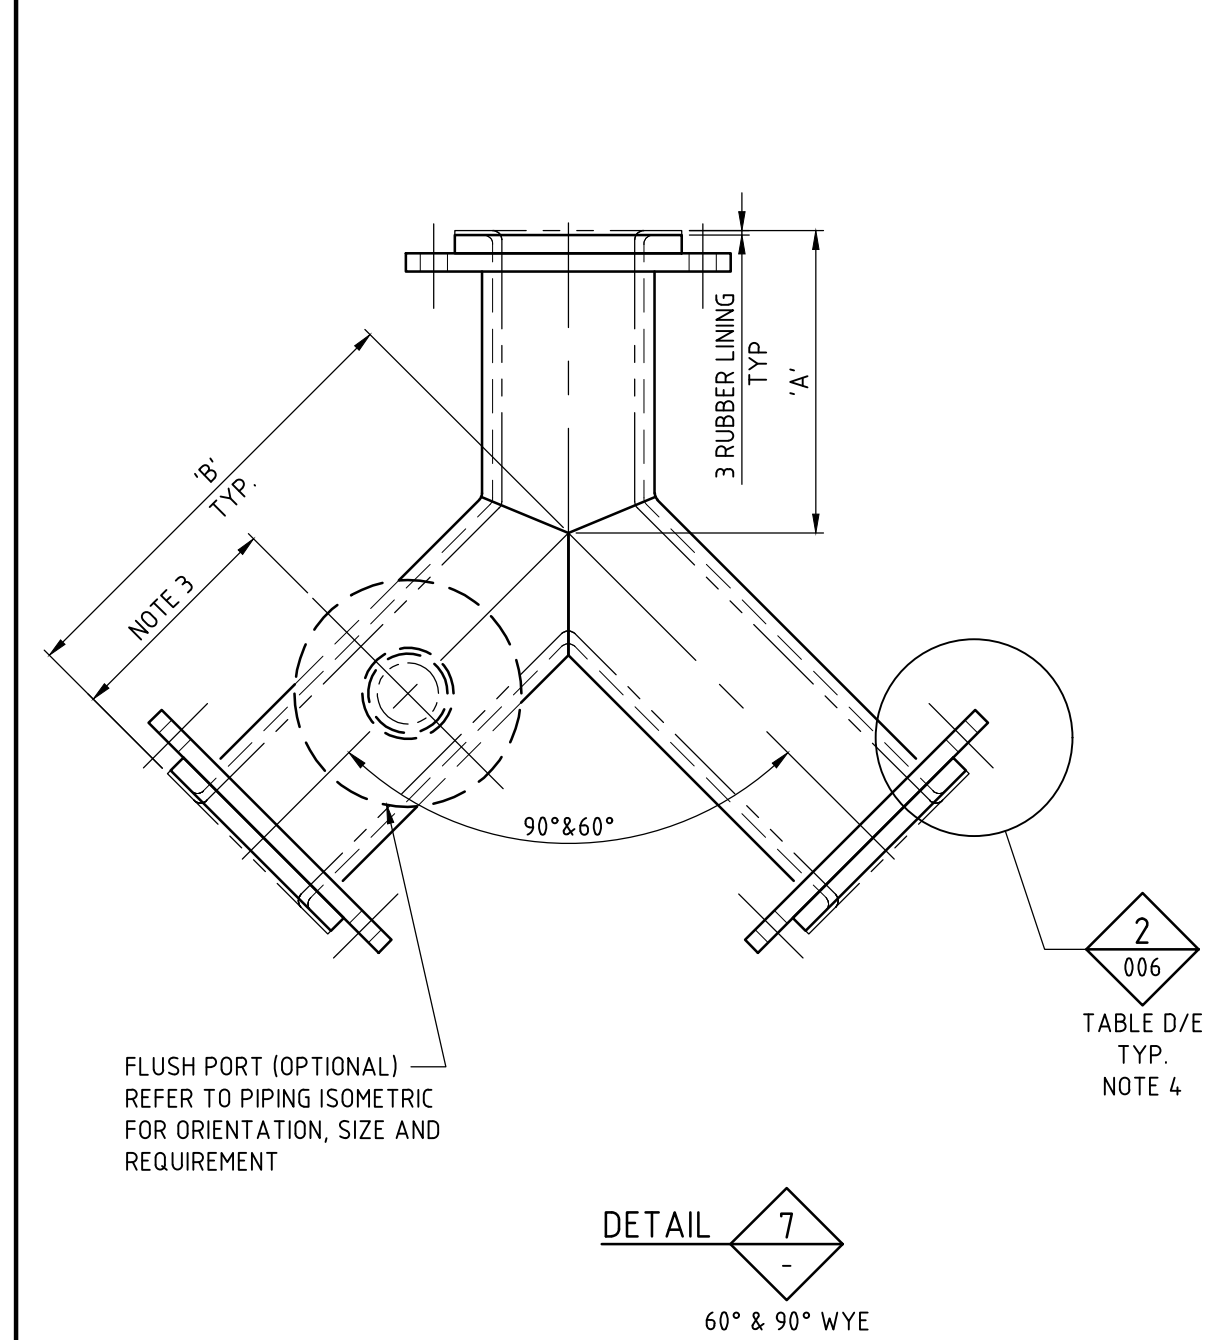


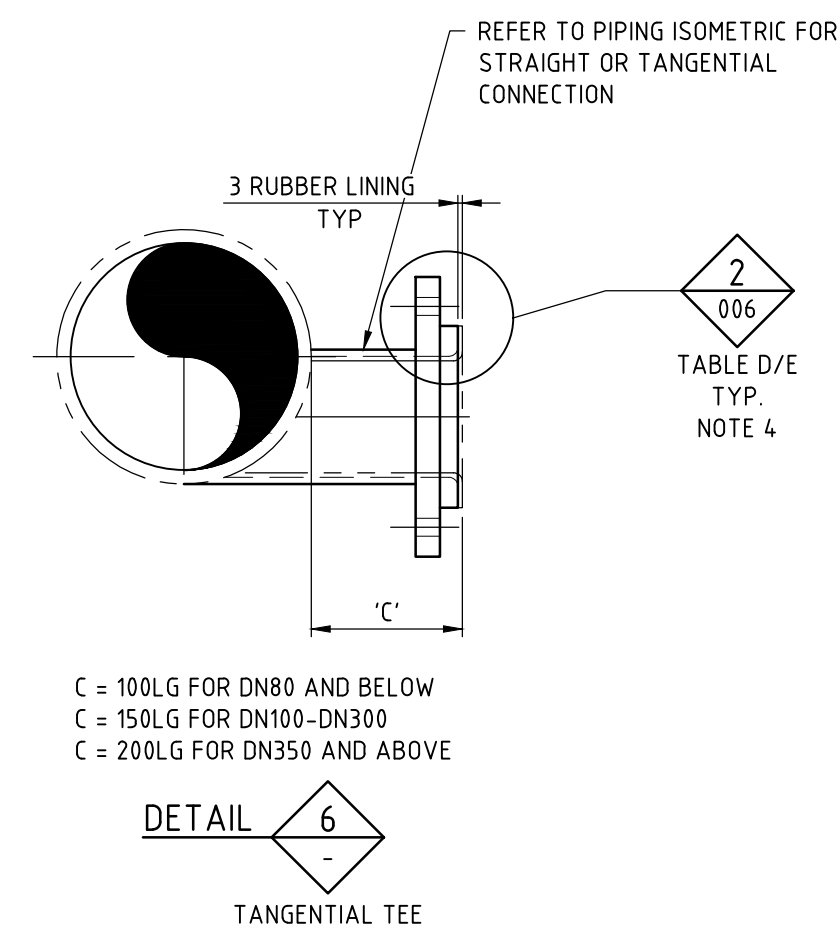

LATERAL		
PIPE DN	'A'	'B'
80	150	350
90	150	400
100	150	450
125	200	450
150	200	500
200	200	600
250	300	650
300	350	750
350	400	850
400	400	950
450	400	1050
500	450	1150
600	500	1300
750	500	1400
900	500	1600

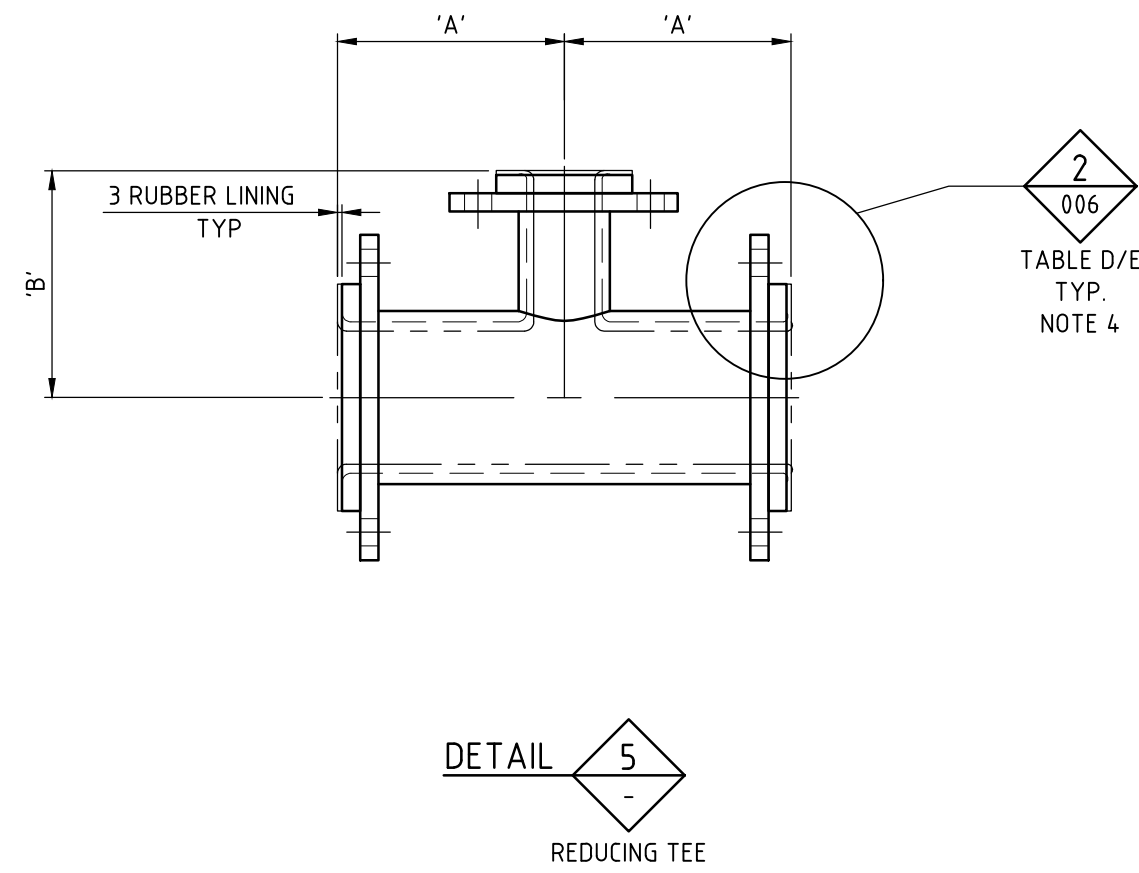

30° - LATERAL		
PIPE DN	'A'	'B'
80	150	550
90	150	600
100	150	600
125	200	700
150	200	750
200	200	900
250	300	1050
300	350	1200
350	400	1300
400	400	1500
450	400	1550
500	450	1670
600	500	1950
750	500	2100
900	500	2500

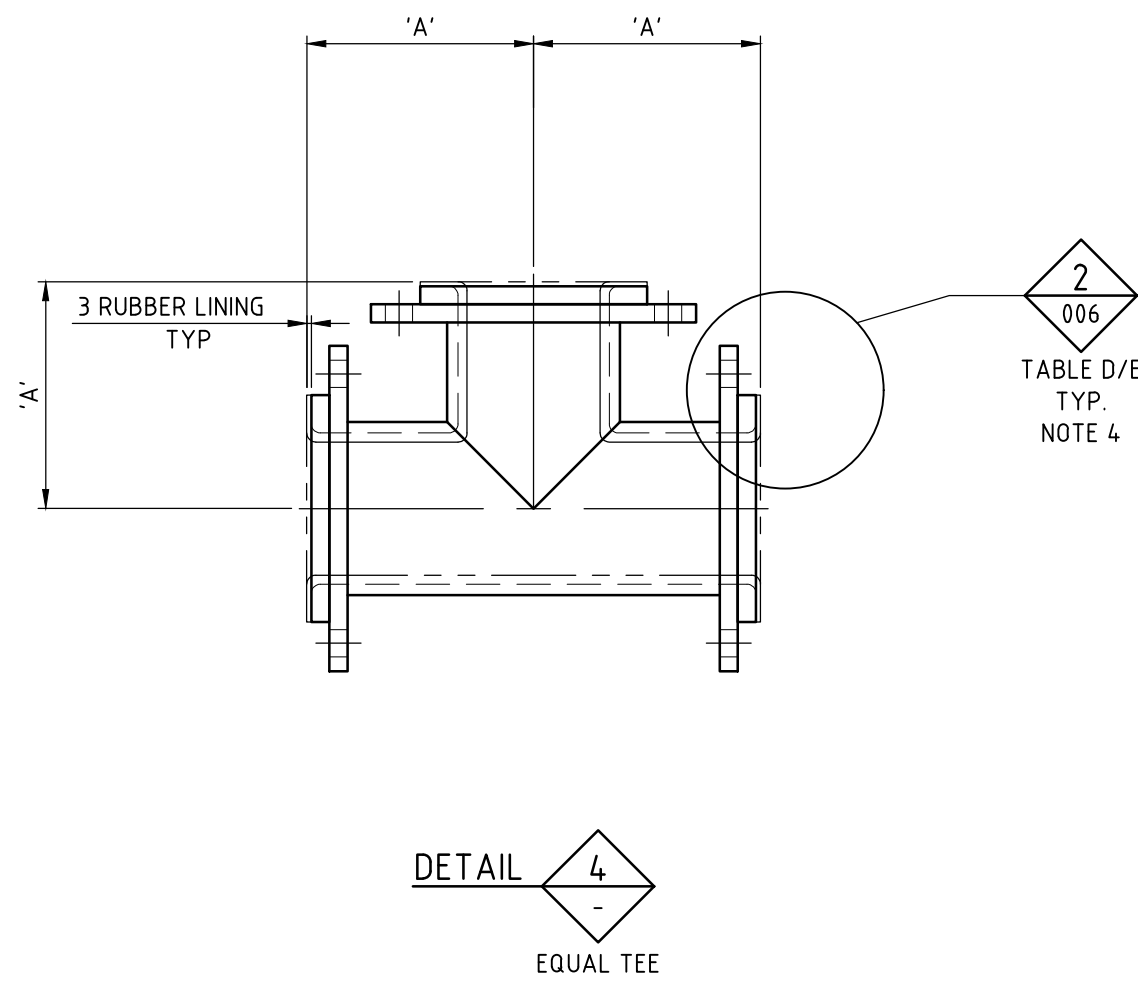

Y - PIECE		
PIPE DN	'A'	'B'
80	200	300
90	200	300
100	200	350
125	200	350
150	200	400
200	200	450
250	300	500
300	350	600
350	350	650
400	350	700
450	350	750
500	450	800
600	500	950
750	500	1100
900	500	1300

		NOMINAL BRANCH SIZE, DN																											
		50		80		100		150		200		250		300		350		400		450		500		600		750		900	
DIMENSION		A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
NOMINAL HEADER SIZE DN	50	150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	80	150	150	175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	100	150	150	175	150	200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	125	175	175	175	175	200	175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	150	175	175	175	175	200	175	225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	200	175	200	175	200	200	200	250	225	250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	250	200	235	200	250	225	250	250	250	275	250	300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	300	200	275	225	275	225	275	250	275	275	275	300	300	325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	350	200	300	225	300	225	300	250	300	275	300	300	325	350	325	350	-	-	-	-	-	-	-	-	-	-	-	-	
	400	200	325	225	325	225	325	250	325	275	350	300	350	350	350	375	350	375	-	-	-	-	-	-	-	-	-	-	
	450	200	350	225	350	250	350	275	350	300	350	325	350	350	375	375	375	425	375	425	-	-	-	-	-	-	-	-	
	500	225	375	225	375	250	400	275	400	300	400	325	400	375	400	400	400	425	400	450	425	475	-	-	-	-	-	-	
	600	225	455	225	455	250	455	275	455	300	455	325	455	375	475	400	475	425	475	450	475	475	500	525	-	-	-	-	
	750	250	525	250	550	250	550	275	550	300	550	325	550	375	550	400	550	425	575	450	575	500	575	550	575	625	-	-	-
	900	200	625	250	625	250	625	275	625	325	625	350	650	375	650	400	650	425	650	450	650	500	650	550	650	625	700	725	-

- NOTES:
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH PIPING STANDARDS GENERAL NOTES AND STANDARD DRAWING INDEX 2000-F00-STD-PP-10001.
 - REDUCERS MATING TO PUMP DISCHARGE NOZZLES, ENGINEERING CALCULATION REQUIRED TO DETERMINE DIMENSIONS AND THICKNESS ON A CASE BY CASE BASIS.
 - OPTIONAL DN50 FLUSHING CONNECTION 200mm FOR DN200 AND BELOW, 250mm FOR DN250 AND ABOVE.
 - REFER PIPING SPECIFICATION FOR REQUIRED FLANGE CLASS