


International Conference on
**Emerging Trends and Applications
in Statistics and Data Science - 2026**

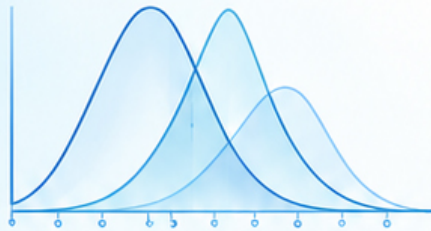

ABSTRACT BOOK

20–21 SEPTEMBER 2026

Organized By



Department of Mathematics
Kathmandu University



Nepal Statistical Society
(NeSS)



20–21 SEPTEMBER 2026



KATHMANDU UNIVERSITY,
DHULIKHEL, NEPAL

Associate Organizations:

Central Department of Statistics, TU, Kirtipur
School of Mathematical Sciences, TU, Kirtipur
Saraswati Multiple Campus, Lainchaur, TU



Supporting Organizations



ORCHID *
INTERNATIONAL College



NeSS International Conference (2026)

Abstract Book

*Emerging Trends and Applications in Statistics
and Data Science
(ICETASD - 2026)*

Kathmandu, Nepal

20-21 September 2026

Organized by



Nepal Statistical Society
(NeSS)



Department of Mathematics
Kathmandu University

First Edition

2026

Associate Organizations



Preface

The **NeSS International Conference (2026)** brings together researchers, academicians, practitioners, and students from around the world to share recent advances, emerging trends, innovative methodologies, and practical applications on Statistics and Data Sciences. The conference provides a platform for exchanging ideas, promoting interdisciplinary collaboration, and fostering professional networks among participants.

This abstract book contains the accepted abstracts presented during the conference, including keynote sessions, invited talks, oral presentations, and poster presentations. The abstracts reflect the diversity of current research and demonstrate the growing impact of statistics, data science, artificial intelligence, machine learning, and quantitative methodologies across a wide range of disciplines.

The organizing committee sincerely appreciates the valuable contributions of all authors, reviewers, session chairs, keynote speakers, invited speakers, sponsors, and volunteers whose dedication and support made this conference possible. Their commitment has ensured the high academic quality of the conference programme.

We hope this abstract book will serve as a useful reference for participants during the conference and continue to be a valuable resource for future research collaborations.

Convenors

Asso. Prof. Dr. Bijay Lal Pradhan

Prof. Dr. Rabindra Kayastha

NeSS International Conference (2026)

Kathmandu, Nepal

20-21 September 2026

Message from the Conference Chair

It is my great pleasure to welcome all participants to **NeSS International Conference (2026)**, held in **Kathmandu, Nepal** from **20-21 September 2026**.

This conference provides an excellent platform for researchers, academicians, professionals, and students to present their latest research findings, exchange innovative ideas, and establish meaningful collaborations. As statistical science continues to evolve rapidly in response to emerging global challenges, meetings such as this play an important role in promoting scientific discussion and interdisciplinary research.

The scientific programme has been carefully designed to include keynote lectures, invited talks, oral presentations, and poster sessions covering a broad spectrum of topics in statistics, data science, artificial intelligence, machine learning, biostatistics, official statistics, actuarial science, and related fields.

This abstract book showcases the accepted contributions of the conference and reflects the dedication and scholarly efforts of the authors. I sincerely thank all contributors, reviewers, session chairs, members of the organizing committee, sponsors, and volunteers for their valuable support and commitment in making this conference a success.

I wish all participants a productive conference, engaging discussions, and an enjoyable stay in Kathmandu, Nepal. May this event inspire new ideas, strengthen existing collaborations, and create opportunities for future research partnerships.

Prof. Dr. Ram Prasad Khatiwada
Conference Chair
NeSS International Conference (2026)

Conference Committees

Conference Chair

- Prof. Dr. Ram Prasad Khatiwada, Tribhuvan University, Nepal

Conference Convenors

- Asso. Prof. Dr. Bijay Lal Pradhan, Tribhuvan University, Nepal
- Prof. Dr. Rabindra Kayastha, Kathmandu University, Nepal

Scientific Committee

- Prof. Dr. Vikash Raj Satyal, Tribhuvan University, Nepal
- Prof. Dr. Vikash Kumar K.C., Tribhuvan University, Nepal
- Prof. Dr. Rabindra Kayastha, Kathmandu University, Nepal
- Asso. Prof. Dr. Bijay Lal Pradhan, Tribhuvan University, Nepal
- Associate Prof. Shital Bhadary, PAHS, Nepal

Organizing Committee

- Prof. Dr. Ram Prasad Khatiwada (Coordinator)
- Prof. Dr. Rabindra Kayastha
- Asso. Prof. Dr. Bijay Lal Pradhan
- Mr. Kiran Kumar Shrestha
- Mr. Gopal Sedhai
- Mr. Kishor Shrestha
- Mr. Sital Bhandari
- Mr. Eak Raj Kadariya

Finance and Sponsorship Sub-committee

- Mr. Eak Raj Kadariya (Coordinator)
- Mr. Gopal Sedhai
- Mr. Bidur Nepal
- Mr. Ishwari Banjade

Reception Sub-committee

- Mr. Kiran Shrestha (Coordinator)
- Mr. Sushil Ghimire
- Mr. Nabaraj Poudyal

Logistics Sub-committee

- Mr. Eak Raj Kadariya (Coordinator)
- Dr. Ishwari Banjade
- Mr. Kiran Shrestha
- Mr. Kishor Khanal
- Mr. Sushil Ghimire
- Mr. Krishna Ram Lamichhane

Scientific Committee

- Prof. Dr. Vikash Raj Satyal, Tribhuvan University, Nepal
- Prof. Dr. Vikash Kumar K.C., Tribhuvan University, Nepal
- Prof. Dr. Rabindra Kayastha, Kathmandu University, Nepal
- Asso. Prof. Dr. Bijay Lal Pradhan, Tribhuvan University, Nepal
- Associate Prof. Shital Bhadary, PAHS, Nepal

Contents

Preface	iii
Message from the Conference Chair	iv
Conference Committees	v
1 Keynote Speaker Abstracts	1
2 Invited Speaker Abstracts	6
3 Oral Presentation Abstracts	9
4 Poster Presentation Abstracts	76
5 Conference Programme	80
6 Technical Papers	82
Author Index	88

1 Keynote Speaker Abstracts

K001

From Hazard Ratios to Time Ratios: An Overview of Proportional Hazards and Accelerated Failure Time Models for Time-to-Event Data

Shankar Prasad Khanal¹

¹ *Dean, Institute of Science and Technology, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: shankar.khanal@cds.tu.edu.np

Keywords: Survival Analysis, Censoring, Proportional Hazards, Accelerated Failure Time, Hazard Ratio, Time Ratio

In studies where the outcome of interest is the time until the occurrence of an event and censoring is present, routine statistical procedures are generally not appropriate. Such situations are commonly encountered in medical, public health, demographic, reliability, and industrial studies. To identify important factors associated with the outcome and quantify their effects, the Cox Proportional Hazards (PH) regression model is one of the most widely used approaches. However, interpretation of the effect size in terms of the hazard ratio (HR) can become challenging when the proportional hazards assumption is violated.

An alternative approach is to analyze time-to-event data using the Accelerated Failure Time (AFT) framework, in which effects are expressed in terms of time ratios (TR). AFT models provide a complementary perspective to the PH approach by directly describing how covariates accelerate or decelerate the time to an event. This presentation provides a brief overview of survival analysis, including its historical development and applications, with particular emphasis on PH and AFT models. Their interpretations, underlying assumptions, practical applications, and limitations are discussed with relevant examples and references. The presentation also highlights the conceptual transition from hazard ratios to time ratios and the circumstances under which AFT models may provide a useful alternative to proportional hazards models.

Ambient Particulate Air Quality Situation in Nepal: A Spatial and Temporal Disaggregation Analysis

Srijan Lal Shrestha¹

¹ *Central Department of Statistics, Institute of Science and Technology, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: shresthasrijanlal@gmail.com

Keywords: Air Quality, Disease Burden, Particulate Matter, Spatial Heterogeneity, Temporal Variation

Ambient particulate air quality is an important environmental indicator and public-health concern, particularly in rapidly urbanizing and developing countries like Nepal. Fine particulate matter (PM_{2.5}) varies considerably across geographical locations and over time due to differences in urbanization, traffic, industrial activities, topography, meteorological conditions, seasonal patterns, etc. Understanding these spatial and temporal variations is essential for assessing the status of ambient air quality and identifying areas and periods of elevated particulate pollution. Ambient air pollution is one of the leading risk factors for EBD assessment in the world. It is the leading environmental risk and occupational risk factor for disease burden assessment, accounting for approximately 120 million DALYs and 4.72 million deaths globally in 2021. In Nepal also, ambient particulate air pollution is a major environmental and public-health challenge. Exposure to PM_{2.5} is widespread, with particularly high concentrations in many urban areas of Nepal, including Kathmandu Valley and the Terai. The resulting exposure contributes substantially to premature mortality, morbidity, and loss of healthy life years in Nepal.

At present, Nepal Government monitors PM_{2.5} along with other parameters through dozens of fixed stations (33) spread across all the provinces and eco-belts of Nepal. The monitoring started a decade earlier in 2016 by DoEnv, supported by ICIMOD and ADB. The annual averages are very high, ranging from 2 to 10 times higher than the recently revised WHO guideline for PM_{2.5} [5 microgram per cubic meter]. Depending upon the location of the monitoring stations, the annual averages of PM_{2.5} concentration show very high spatial variation between stations, districts, provinces, and municipality types. Temporally, there have been marked annual variations in the past decade, with a declining trend until recent years but showing increased values thereafter.

Lean AI: From Scaling Walls to Sustainable Intelligence — A Fitness Era Framework for Efficient, Equitable, and Edge-Ready Artificial Intelligence

Prof. Dr. Sudan Jha¹,

Member, National Planning commission

Corresponding author: sudan.jha@ku.edu.np

Keywords: Lean AI, Efficient machine learning, Model compression, Quantization, Knowledge distillation, Mixture of experts, Edge AI, Sustainable AI, AI equity, Green computing, Scaling laws, Model collapse, Inference optimization, Low-Resource AI, Fitness era

The past decade of artificial intelligence has been defined by an unprecedented race toward scale: models with hundreds of billions of parameters, training runs costing tens of millions of dollars, and inference workloads consuming as much electricity as small cities. Yet this trajectory is neither sustainable nor equitable. Drawing on insights from the National Conference on Technology for Transformation, this presentation argues that the future of AI lies not in building ever-larger models, but in designing leaner, smarter, and purpose-built systems. We introduce the concept of Lean AI — an architectural and philosophical shift toward doing more with less. Through a series of interconnected themes, we examine the hidden costs of model obesity: the parameter explosion, the scaling wall, GPU debt, data gluttony, model collapse, and the environmental burden of inference at planetary scale. We then present the technical pillars that make Lean AI possible — quantization, knowledge distillation, mixture of experts, pruning, and edge deployment — demonstrating how a 7-billion-parameter model can match the performance of models hundreds of times larger. Beyond engineering, we frame Lean AI as a matter of equity and access. When training a frontier model costs more than the GDP of many nations, the global research community is locked out of participation. Lean AI offers a counter-narrative: intelligence that runs on a 35 Raspberry Pi, fine-tunes on a laptop GPU, and responds in milliseconds without cloud dependency. We highlight Nepal’s unique opportunity to lead in low-resource AI — turning infrastructure constraints into competitive advantages. Finally, we propose a Fitness Era mindset for researchers: measuring success not by parameter count or leaderboard rank, but by efficiency quotients — accuracy per parameter, performance per watt, and result per dollar. We conclude with a call to action: the future of AI belongs to the fittest ideas, not the fattest models. Intelligence must become sustainable, accessible, and equitable — and that transformation begins with the choices we make today.

Phase-wise Analysis of the Bowling Performance of Cricketers in the Nepal Premier League

Prof. Dibyojyoti Bhattacharjee¹,

¹*Department of Statistics, Assam University, Silchar, India*

Corresponding author: djb.stat@gmail.com

Keywords: Cricket Analytics, Data Mining in Sports, Combined Bowling Rate, Format Specific Bowling Performance Measure, Franchisee Cricket, Nepal Premier League

Cricket being a data rich sports and data management becoming simpler owing to the advances in computer technology, the sports have now become a data-driven discipline. Simultaneously, cricket has also seen mushrooming of different franchise league throughout the globe which has enhanced the need of precise player analytics. This presentation on the basis of bowling data collected from the first two seasons of the Nepal Premier League (a franchise-based Twenty20 cricket tournament established in 2024) quantifies the performance of bowlers in three distinct match phases viz. Powerplay, middle and death overs. Two different measures of bowling performance- the Combined Bowling Rate (CBR) and the Format Specific Bowling Performance Measure (FSB). The distributional pattern of the two measures were later utilized to attain practical benchmark for superlative bowlers in the different phases of a Twenty20 innings. The exercise provides the coaches with a strategic framework for the rotation of bowlers during live match and helps the franchises in making informed and cost effective bidding during player auction so that the squad has specialist bowlers for all different match situations.

From Static to Dynamic Survival Prediction: Bridging Landmarking, Competing Risks, and Machine Learning

Md Hasinur Rahaman Khan, PhD¹

¹ *Professor, Institute of Applied Statistics and Data Science, University of Dhaka, Dhaka 1000, Bangladesh*

Corresponding author: hasinur@isrt.ac.bd

Keywords: Dynamic survival prediction, Landmarking, Mixed-model landmarking, Competing risks, Longitudinal data, Machine learning, Random survival forest, Gradient boosting

Survival risk is inherently dynamic, as biomarkers, treatment response, and other patient-specific information evolve during follow-up. This keynote presents a framework for moving from static survival prediction toward dynamic risk prediction by integrating landmarking, longitudinal trajectories, competing risks, and machine learning. Conventional landmarking provides a practical mechanism for updating predictions but often relies on the most recent biomarker value, potentially ignoring important longitudinal information. Mixed-model landmarking (MML) addresses this limitation by estimating patient-specific trajectories from repeated measurements and incorporating them into subsequent risk prediction. The framework further accounts for competing events and uses flexible machine-learning approaches, including random survival forests (RSF), XGBoost, LightGBM, and Bayesian additive regression trees (BART), to capture nonlinearities and complex interactions. Simulation studies and an application to a Phase III breast-cancer trial demonstrate the potential of the proposed integration. The results show that incorporating longitudinal trajectories can improve predictive performance, particularly when combined with flexible learning methods. RSF-MML performs strongly across several simulation settings, while in the breast-cancer application MML consistently reduces Brier scores across the evaluated machine-learning methods. Discrimination, however, varies across methods and landmark times, highlighting the importance of evaluating dynamic prediction using multiple performance measures. Overall, the findings support a shift toward adaptive survival prediction systems that continuously update risk as new information becomes available, while appropriately accounting for longitudinal history and competing events.

2 Invited Speaker Abstracts

I001

The Geometry of High Dimensions

Shree Ram Khadka¹ Santosh Gnawali²

¹ *School of Mathematical Sciences, Tribhuvan University, Nepal*

² *Central Department of Mathematics, Tribhuvan University, Nepal*

Corresponding author: shreeramkhadka@gmail.com

Keywords: Optimization, Big data, Machine learning, Risk minimization

Big data analytics is constrained by nonlinear optimization programs under uncertainty. The study of real-world problems of this nature is challenging because their geometry is complex in terms of nonlinearity, high dimensionality, multimodality, non-convergence, non-smoothness, high complexity, and so on. However, tackling real-world problems has always been an interesting area of research, including in the current age of big data. In this presentation, we narrate the challenges of real-world problems and analyze them from optimization and machine learning perspectives.

Natural Language Processing (NLP) of Nepali Audio Files and Text Analytics

Shital Bhandary^{1,2}

¹ *School of Medicine/Public Health, Patan Academy of Health Sciences, Nepal*

² *School of Mathematical Sciences, Tribhuvan University, Nepal*

Corresponding author: shitalbhandary@gmail.com

Keywords: Nepali Audio File, ASR, NLP, Transcription, Translation, Content Analysis

Pragmatic research paradigms within health professions education and public health sciences often rely on collecting rich data through structured, face-to-face interviews with interview guides. The resulting audio recordings, typically captured using digital or mobile devices, require a rigorous transcription process in Nepali before advanced analysis can commence. Historically, this transcription phase has been a significant constraint due to the immense time commitment required for manual transcription.

While modern automatic speech recognition (ASR) technologies, such as those utilized by OpenAI Whisper, demonstrate high fidelity in languages like English or Spanish, their accuracy with Nepali audio remains variable and often necessitates extensive post-production editing. A paradigm shift has been enabled by the integration of NotebookLM (Gemini Notebook) with the Gemini 2.5 multimodal AI model. This new configuration significantly enhances transcription accuracy, enabling near real-time conversion of Nepali audio into high-fidelity Nepali text. Crucially, this tool also offers rapid and accurate translation services for the transcribed corpus.

This efficiency transforms the research lifecycle, allowing researchers to seamlessly transition from raw audio into a clean, translated text corpus ready for sophisticated analysis, including classical qualitative content analysis following Braun and Clarke's six-step methodology, or quantitative content analysis based on text mining and Latent Dirichlet Allocation (LDA) for automated classification, sentiment profiling, and the generation of a meaningful term-document matrix for data mining. This talk will showcase examples of ASR of Nepali audio and its text analytics from health professions education and public health sciences.

Small Area Estimation of Mortality for Countries with Limited and Scarce Data: Nepal as a Case Study

Jyoti U. Devkota¹

¹ *Professor, Department of Mathematics, Kathmandu University, Dhulikhel, Kavre, Nepal*

Corresponding author: drjdevkota@ku.edu.np

Keywords: Small Area Estimation, Mortality, Life Tables, Survivorship Function, Regression Model, Mortality Data, Nepal

Vital Statistics are scarce in developing countries. The system of continuous registration of vital events is not efficient in such countries. Hence there is an urgent need to develop mathematical techniques that address this problem. Data on fertility and migration are scarce. National data on mortality are still scarcer, due to its somber nature. Further mortality data for small places are practically nonexistent. But these data serve as development indicators and provide guidelines to policy makers and planners. The reason behind the sorry state of such data is the lack of awareness, incentives and remote geographical locations. This paper is developed keeping this knowledge gap in mortality data into consideration. Life tables explain the mortality experience of a cohort. It is an important component in the computation of average life expectancy at birth and age specific death rates. In this paper, a parsimonious regression model for survivorship function on age and time variables is developed. The inherent pattern of based on census data from 1971 to 2011 is identified. The behavior of the regression coefficients and the model efficiency parameters are analyzed. Then this model is calibrated for small places. The mortality of two small places of Nepal namely, Kathmandu and Manang are estimated. The developed model is validated on the abundant and good quality data of Germany and the state of Niedersachsen. It is said that something is better than nothing. The developed technique and the model discussed here, estimated deficient mortality data with a high degree of accuracy. This was true, not only for developing countries like Nepal and India, but also for developed countries like Germany.

3 Oral Presentation Abstracts

T001

From Anti-Spoofing to Trustworthy Audio Forensics: A Bibliometric and Science-Mapping Review of Audio Deepfake Detection

Prawesh Bhandari¹, Prashansha Neupane¹, Arju Marasini², Bishwas Sharma³

¹ *Bhairahawa Multiple Campus, Bhairahawa, Nepal*

² *Lumbini Banijya Campus, Butwal, Nepal*

³ *Department of Earth Sciences, Western University, Canada*

Corresponding author: praweshbhandari4@gmail.com

Keywords: Anti-spoofing; Audio deepfake detection; Bibliometric analysis; Science mapping; Synthetic speech.

This study maps the intellectual structure, knowledge base, and emerging frontiers of audio-deepfake detection, addressing the absence of an integrated account of the field’s evolution, influence, collaboration, and thematic change. A PRISMA-informed bibliometric and science-mapping review analysed 945 deduplicated Scopus and Web of Science records (2020-2026; one early-online 2027 record). Performance analysis, citation and co-citation analysis, bibliographic coupling, collaboration mapping, keyword co-occurrence, thematic mapping, and trend analysis were conducted using bibliometrix/Biblioshiny. The field expanded rapidly (56.9% complete-year annual growth) but remains conference-dominated and only selectively internationalised. ASVspoof and a small set of benchmark-centred studies form the intellectual core, while recent research is shifting towards self-supervised learning, cross-dataset generalisation, real-time detection, source tracing, and explainable forensics. Persistent gaps concern multilingual and low-resource data, robustness to unseen generators and channels, privacy, fairness, and operational validation. The field is moving from benchmark optimisation towards auditable, provenance-aware, and deployment-ready detection. Progress depends on standardised cross-language evaluation, representative real-world datasets, transparent uncertainty reporting, and closer integration of technical, ethical, and governance perspectives.

Unequal Education-to-Work Pathways: Gendered Labour-Force Exclusion and SDG Interlinkages in Nepal

Arju Marasini¹, Prashanna Neupane¹, Christopher Mbiba²

¹ *Lumbini Baniyya Campus, Butwal Nepal*

² *University of Cape Coast, Ghana*

Corresponding author: marasiniarju010@gmail.com

Keywords: Labour-force exclusion; Education-to-work conversion; Gender inequality; Sustainable Development Goals

This study examines whether education reduces labour-force exclusion in Nepal, whether its effects differ by gender, and whether excluded adults include a discouraged but potentially employable group. Using 27,011 adults from the nationally representative Nepal Living Standards Survey 2022/23, the study applies survey-weighted descriptive analysis, logistic regression, education-by-gender interaction models, predicted probabilities, and a sub-analysis of discouraged-like exclusion. Labour-force exclusion affected 65.0% of adults. Education showed a clear threshold effect: tertiary education offered the strongest protection, while lower and intermediate levels produced limited gains. Women remained more likely than men to be excluded at every education level; even tertiary-educated women had higher predicted exclusion than men with no schooling. Among excluded adults, higher education was linked to greater willingness to work if suitable jobs were available, indicating hidden labour potential. Education alone does not guarantee access to the labor market. Nepal needs to have demand-driven vocational education system, employment opportunities, childcare provision, safe means of transport, placement service provision, and gender-aware labor market policies to conform to SDG goals 4, 5, 8, and 10. The present study merges the idea of gendered education, work transition, labor force exclusion, and discouraged labor force participation into one nationally representative approach.

An Enhanced Air Quality Index for Multi-Pollutant Air Quality Assessment

Ronit Paul¹, Tanusree Deb Roy¹, Dibyojyoti Bhattacharjee¹

¹ *Department of Statistics, Assam University, Silchar, Assam, India.*

Corresponding author: paulronit111@gmail.com

Keywords: Air Pollution, Composite Index, Environmental Monitoring, Classification, Sensitivity Analysis

Air Quality Index (AQI) is an essential tool for communicating ambient air quality and its associated health risks. However, conventional AQI frameworks often rely on the maximum sub-index approach, which may not adequately capture the combined influence of multiple pollutants. This study proposes an improved AQI by integrating normalized pollutant concentrations using eight weighted aggregation techniques: Weighted Arithmetic Mean, Weighted Geometric Mean, Weighted Harmonic Mean, Principal Component Analysis (PCA) Index, Entropy Index, Technique for Order Preference by Similarity to Ideal Solution (TOPSIS), Ordered Weighted Averaging (OWA), and Fuzzy Aggregation. To evaluate the robustness of these methods, a One-at-a-Time (OAT) sensitivity analysis was conducted by perturbing individual pollutant concentrations while keeping the remaining pollutants unchanged. The results revealed that all aggregation methods exhibited relatively low sensitivity to input perturbations, indicating satisfactory stability. Among them, the Weighted Harmonic Mean demonstrated the lowest average sensitivity index (0.5040%), signifying the highest robustness and reliability, whereas TOPSIS showed the greatest sensitivity to changes in pollutant values. A novel six-category AQI classification scheme, based on the the Weighted Harmonic Mean is subsequently established while preserving the familiar structure of the existing AQI models This framework offers a reliable alternative to conventional AQI methods, least effected by the extreme observations, and can support improved environmental monitoring, public health assessment, and air quality management.

Distributional and Stochastic Properties of Concomitants of Order Statistics from the Clayton Copula-Based Bivariate Gamma Distribution

Ruhiteswar Choudhury¹, Tanusree Deb Roy¹

¹ *Department of Statistics, Assam University, Silchar, Assam, India.*

Corresponding author: sonu.choudhury2015@gmail.com

Keywords: Moment generating function, survival function, stochastic ordering, incomplete gamma function.

This paper investigates the distributional properties of concomitants of order statistics arising from a bivariate Gamma distribution constructed via the Clayton copula, referred to as the Clayton Copula-based Bivariate Gamma (CBG) distribution. The proposed model assumes positive shape and scale parameters for the Gamma marginals, while the Clayton dependence parameter is positive, thereby allowing the model to accommodate varying degrees of positive dependence and lower-tail association. In this study, the joint and marginal probability density functions of the bivariate model, the conditional distributions, and the distribution of the r^{th} order statistic are derived. Closed-form and integral expressions for the density of the r^{th} concomitant are established, together with a finite-sum closed-form representation when the shape parameter is an integer. The moment generating function (MGF), mean, and higher-order moments of the concomitant are derived analytically. A stochastic ordering result is established, showing that higher-order concomitants are stochastically larger. The survival function of the concomitant is also obtained and examined under varying levels of dependence. Numerical illustrations demonstrate that changes in the Clayton dependence parameter substantially influence the distribution, moments, and tail behaviour of the concomitant, with stronger dependence producing greater lower-tail association. Comparisons with the corresponding independent case further demonstrate the practical relevance of incorporating the Clayton copula dependence structure for modelling dependent Gamma variables. Graphical and numerical results support the theoretical findings and highlight the ability of the proposed model to capture asymmetric dependence and lower-tail behaviour.

Consumer Shopping Culture in Marts and Departmental Stores: Evidence from Ward of Kathmandu Metropolitan City

Daman Bahadur Singh¹, Bishnu Raj Kifle¹

¹ *Department of Statistics, Saraswati Multiple Campus, Thamel, Kathmandu, Nepal*

Corresponding author: singhdaman4380@gmail.com

Keywords: Shopping Culture, Consumer Behaviour, Departmental Store, Retail Marketing, Customer Satisfaction, Kathmandu Valley

The quick expansion of supermarkets and departmental stores has ended up changing the shopping culture for city consumers in Nepal, sort of in a noticeable way. Before, most people relied on small neighbourhood grocery stores, but now those kinds of practices are getting replaced more and more by organized retail outlets. These newer places provide a bigger range of goods, competitive rates, frequent promotional schemes, and what many customers feel is a better overall shopping experience.

This study is meant to look into how customers actually shop when they visit marts and departmental stores in Ward No. 9, Kathmandu Metropolitan City. More precisely, it explores how the store environment, product quality, pricing strategies, promotional activities, customer service, convenience, and technological facilities affect consumers' shopping behaviour, and also their eventual purchase decisions. This study uses a quantitative approach based on the positivist paradigm and a descriptive plus analytical research design. The primary data will be gathered from customers via a structured questionnaire, with a five-point Likert scale that keeps things consistent. Participants will be chosen using systematic random sampling, and that should subtly reduce bias. To make sense of the responses, descriptive statistics will be applied, along with reliability analysis (Cronbach's Alpha), exploratory factor analysis, correlation testing and then multiple regression analysis will also be used.

Overall, the results are anticipated to show the main drivers that shape shopping culture inside contemporary retail outlets, and then offer workable suggestions for retailers so they can improve customer satisfaction, build loyalty, and stay competitive. In addition, the research is expected to add value to the continuing body of work on consumer behaviour and organised retailing in Nepal, especially within the local context.

Comparison of the predictive performance of machine learning models for predicting low birthweight among live births in Nepal using data from the Nepal Demographic and Health Survey 2022

Krishna Bahadur G.C.^{1,2}, Amit Arjyal², Haris Khurram³, Apiradee Lim¹

¹ *Department of Mathematics and Computer Science, Faculty of Science and Technology, Prince of Songkla University, Pattani, Thailand*

² *Patan Academy of Health Sciences, Lagankhel, Lalitpur, Nepal*

³ *FAST School of Management, National University of Computer and Emerging Sciences, Chiniot-Faisalabad Campus, Faisalabad, Pakistan*

Corresponding author: krishnabahadurgc@pahs.edu.np

Keywords: Low birth weight, Machine learning, SMOTE, NDHS

Low birth weight (LBW) is a major public health problem in Nepal and is associated with increased neonatal mortality and long-term adverse health outcomes. Machine learning (ML) offers a promising approach for early prediction of LBW, but evidence from Nepal is limited. This study compared the predictive performance of different ML models using nationally representative data. This study used data from the 2022 Nepal Demographic and Health Survey. After applying the exclusion criteria and handling missing data, 1,390 live births were included. Twenty-one(21) predictor variables were included based on literature review. Five machine learning models: logistic regression (LR), decision tree (DT), random forest (RF), support vector machine (SVM), and extreme gradient boosting (XGBoost) were developed and compared. The dataset was randomly split into training (80%) and testing (20%) sets. To address class imbalance, the Synthetic Minority Oversampling Technique (SMOTE) was applied to the training set. Model performance was evaluated on the testing set using accuracy, sensitivity, specificity, precision, F1-score, and the area under the receiver operating characteristic curve (AUC). Predictive performance varied across the machine learning models. There was variation in the discriminative performance between the models before and after addressing class imbalance using SMOTE with RF demonstrating highest performance and SVM the greatest sensitivity. Variable importance analysis was also performed which identified variables with birth order being the most influential predictor in this analysis alongwith other factors such as geography and socioeconomic status related variables. The predictive performance of the various models varied and the effect of using SMOTE was also variable among the models. SMOTE based machine learning may support accurate detection of pregnancies with high risk of LBW.

Classical and Objective Bayesian Approaches to Estimating the Process Capability Index Cpc for the Dhillon Process Distribution

Abhimanyu Singh Yadav¹

¹ *Department of Statistics, Banaras Hindu University, Varanasi, Uttar Pradesh, India*

Corresponding author: abhistats@bhu.ac.in

Keywords: Process capability index; Bootstrap confidence intervals; Product spacing function, Bayesian estimation methods; Monte Carlo simulation.

The process capability index (PCI) is a valuable tool for evaluating how effectively a product meets customer expectations and for assessing overall process performance. When the quality characteristics of a process follow a normal distribution, conventional PCIs typically provide reliable and accurate results. However, these traditional indices may lead to incorrect conclusions when applied to non-normally distributed processes, potentially resulting in flawed decisions. In light of this challenge, the present study focuses on the process capability index Cpc, which remains suitable for both normal and non-normal process distributions. Specifically, we consider a process that follows the Dhillon distribution. Further, classical estimation along with classical confidence intervals and bootstrap confidence intervals for Cpc are constructed and evaluated based on their average widths and coverage probabilities. Additionally, Bayesian estimation of Cpc is carried out using both the product spacing and likelihood functions under symmetric and asymmetric loss functions assuming objective priors for the model parameters through Markov Chain Monte Carlo algorithm. A detailed Monte Carlo simulation study is conducted to evaluate the performance of the proposed estimators. Finally, the methodology is illustrated using three real datasets, thereby confirming the practicality, flexibility, and reliability of the proposed inferential framework for process capability evaluation.

Determinants of Dairy Milk Production: Perceived Climate Stressors and Adaptation Practices among Lowland Farmers of Eastern Nepal

Dilli Ram Sedai¹, Nuttaya Yuangyai¹, Kuaanan Techato¹, Basan Shrestha²

¹ Prince of Songkhla University, Songkhla, Thailand

² Monitoring and Evaluation Expert, Kathmandu, Nepal

Corresponding author: Nuttaya Yuangyai

Keywords: Perception, Milk Production, Adaptation, Heat Stress, Disease Prevalence, Koshi Province, Mixed Methods

Climate change has threatened livestock farming, influencing food security, rural livelihoods, and the national economy. The study assessed farmers' perceptions of 16 factors associated with four domains, namely milk production, reproduction, health management, and methane production, affecting dairy milk production. Farmers were categorized by sex of the household head. A total of 159 dairy farmers from Jhapa, Morang, and Sunsari districts in Koshi Province were surveyed in May 2024 using a structured questionnaire with a five-point Likert scale (5 = high effect to 1 = low effect). Sex of the household head, with female coded as a dummy variable with 1 and 0 otherwise, was also considered as a determining factor. Average milk production in litres per cattle per year was measured as a continuous quantitative outcome variable. The ordinary least squares (OLS) regression models showed that thermal stress in reproduction had the strongest significant positive effect on milk production, with each unit increase in milk production associated with a 0.455 times increase in the Likert-scale perception of thermal stress. Disease prevalence had a significant positive effect on milk production, with each unit increase in milk production associated with a 0.319 times increase in the Likert-scale perception of disease prevalence. Deficit of leguminous forage and concentrate related to methane reduction had a significant positive effect on milk production, with each unit increase in milk production associated with a 0.274 times increase in the Likert-scale perception of forage deficit and methane production. The results showed a significant negative effect of the prevalence of vector-borne diseases on the animal health management system and milk production, with each unit increase associated with a 0.286 times decline in the Likert-scale perception of vector-borne disease prevalence. All four measures were unexpected and require further investigation to support these claims. However, farmers with higher levels of perception may have undertaken measures such as vaccination and treatment of animals against disease prevalence, improvement of feeding practices, breed improvement, and housing improvement to maintain milk production levels. The study presents a framework linking farmer perceptions with measured impacts and highlights the need for targeted interventions. Strengthening adaptive capacity requires improved disease prevention through vaccination, better housing to reduce heat stress, tick and vector control programs, and the development of climate-resilient leguminous forage varieties. These findings would guide extension workers, academic institutions, program planners, and policymakers in designing climate-resilient livestock strategies.

A Machine Learning-Based Framework for Tomato Maturity and Sweetness Classification in Smart Agriculture

Joy Deb¹, Suraj Roy², Dibyojyoti Bhattacharjee¹

¹ *Department of Statistics, Assam University, Silchar, Assam, India*

² *Department of Statistics, Karimganj College, Sribhumi, Assam, India*

Corresponding author: joystat25@gmail.com

Keywords: Tomato quality assessment, Maturity classification, Sweetness classification, ResNet50, Principal Component Analysis, Machine learning.

Smart agriculture has emerged as a promising approach for improving crop quality assessment through the integration of artificial intelligence, computer vision, and machine learning. Horticultural crops play a vital role in human nutrition, making accurate quality assessment essential for improving consumer satisfaction, market value, and post-harvest management. Among these crops, tomato is one of the most widely consumed vegetables worldwide, and its quality is largely associated with external maturity and internal quality attributes such as sweetness. Conventional methods for evaluating these characteristics are often destructive, labor-intensive, and time-consuming, limiting their suitability for rapid and non-destructive assessment. This study proposes a machine learning-based framework for tomato maturity and sweetness classification using fused handcrafted and deep image features. A dataset comprising 450 tomato fruits and approximately 1,400 images representing three maturity stages, namely Light Red, Turning Red, and Ripe Red, was acquired using a smartphone camera under controlled imaging conditions. Colour and texture features were extracted from the images and combined with deep features obtained from a pre-trained ResNet50 model. Principal Component Analysis (PCA) was applied to reduce the dimensionality of the deep feature space, and the resulting features were fused to construct the final feature representation. Random Forest, XGBoost, Support Vector Machine, and Multilayer Perceptron models were optimized using five-fold cross-validation and subsequently evaluated on an independent test set. For maturity classification, the optimized Random Forest model achieved an independent test accuracy of 90.18%, with macro precision, recall, and F1-scores of 0.902, 0.903, and 0.903, respectively. Class-wise analysis further demonstrated consistent performance across the three maturity stages. For sweetness assessment, measured Brix values were grouped into Low and High sweetness categories using the K-Means clustering algorithm. The maturity stage was incorporated as an additional predictor along with the fused image features for sweetness classification. Among the evaluated models, the Support Vector Machine achieved the highest independent test accuracy of 60.00% and a macro F1-score of 0.600. The comparatively moderate performance in sweetness classification indicates the limitations of external visual features for predicting internal biochemical characteristics. Therefore, the proposed framework demonstrates the potential of combining feature fusion and machine learning for non-destructive tomato quality assessment and provides a basis for developing intelligent quality evaluation systems in smart agriculture and post-harvest management.

Truncated Shanker Distribution with Properties and Applications

Y. Sanjoy Kumar Singha¹, Rama Shanker¹

¹ *Department of Statistics, Assam University, Silchar, Assam, India*

Corresponding author: sanjoykumarsingha755@gmail.com

Keywords: Truncation; Lifetime Distribution, Maximum Likelihood Estimation, Statistical properties, goodness of fit

Lifetime distributions play a fundamental role in reliability engineering, survival analysis, actuarial science, and biomedical research for modelling positive continuous data. However, in many practical situations, observations are available only within a restricted range due to design constraints, detection limits, or data collection procedures, making truncated models more appropriate than their parent distributions. Motivated by this need, the present study introduces the Truncated Shanker Distribution (TShD) by truncating the Shanker distribution over a specified interval. The proposed model includes left-truncated, right-truncated, and doubly truncated forms, thereby providing greater flexibility for modelling bounded lifetime data. Several statistical properties of the proposed distribution are investigated, including the probability density function, cumulative distribution function, survival function, hazard rate function, reverse hazard rate function, mean residual life function, and the first four raw moments. The model parameters are estimated using the Maximum Likelihood Estimation (MLE) method, and the likelihood equations are derived explicitly. Further, the flexibility and usability of the model have been evaluated for two datasets, and using goodness of fit test has been compared with the comparative models.

Quantifying the Quality of Water of Some Naturally Occurring Perennial Lakes of South Assam, India

Subham Roy¹, Dibyojyoti Bhattacharjee¹

¹ *Department of Statistics, Assam University, Silchar, Assam, India*

Corresponding author: roysubham1999x@gmail.com

Keywords: Composite Index, Water Quality Index, Seasonal Variation, Sensitivity Analysis.

Wetlands are important transitional ecosystems between terrestrial and aquatic environments, and their water quality plays a crucial role in ecosystem functioning and human use. South Assam receives substantial rainfall and contains several perennial lakes that support domestic and agricultural activities. This study assesses the water quality of three perennial lakes, namely Dolu, Bawwa, and Sone Beel, using three composite Water Quality Indices (WQIs): Modified NSF-WQI, Tiwari and Mishra WQI (TM-WQI), and CPCB-based Weighted Arithmetic WQI. Twelve physicochemical and microbiological parameters were monitored across different months and sampling sites. The Modified NSF-WQI used DO, pH, BOD, nitrate, phosphate, and TDS with normalized NSF weights, whereas TM-WQI and CPCB-WQI applied inverse standard-based weighting schemes. The results revealed noticeable spatial and temporal variations in several parameters, particularly EC, BOD, nutrients, TDS, and E. coli. The three indices produced different water quality classifications, reflecting differences in their weighting and aggregation procedures. Sensitivity analysis further identified DO, phosphate, and BOD as the dominant influencing parameters in the NSF, TM, and CPCB indices, respectively. The study highlights the importance of comparing multiple WQI approaches for reliable assessment of wetland water quality and temporal variability.

Inference on stress-strength reliability using product spacing function for the inverted exponentiated gamma distribution with application to the electrode breakdown times data

Rajeev Kumar¹

¹ *Department of Statistics, Banaras Hindu University, Varanasi, India*

Corresponding author: rajeevisari@gmail.com

Keywords: Inverted exponentiated gamma distribution, Stress-Strength reliability, Maximum product spacing estimation, Bayesian inference; Bayes computation

In this paper, point and interval estimation procedures for the stress-strength reliability (SSR) parameter are developed based on the inverted exponentiated gamma distribution (IEGD). The IEGD is proposed as a new and flexible lifetime distribution that exhibits desirable characteristics for modeling reliability and survival data. Classical estimation procedures for the SSR parameter are formulated using both the maximum likelihood estimation (MLE) and maximum product spacing estimation (MPSE) methods. For interval estimation, asymptotic confidence intervals (ACIs) are derived based on MLE and MPSE, along with three bootstrap confidence intervals namely standard (s-boot), percentile (p-boot), and t-bootstrap (t-boot). Furthermore, a comprehensive Bayesian framework is developed by incorporating independent gamma flexible priors under a squared error loss function, based on both the usual likelihood function and the product spacing function. Bayesian credible intervals for the SSR parameter are constructed and compared with their classical counterparts. The comparative analysis reveals that both classical and Bayesian estimators, as well as their associated intervals, exhibit satisfactory efficiency and coverage characteristics. Finally, the practical utility of the proposed methods is illustrated through a real data application, demonstrating the suitability and effectiveness of the IEGD for reliability analysis.

Do More Words Change Minds? Tracing Sentiment Transitions in Nepali Political Tweets

Durga Pokharel¹

¹ *Herald College, Kathmandu, Nepal*

Corresponding author: pokhareldurga88@gmail.com

Keywords: Sentiment Analysis, Political Tweets, Low resource Language

Political tweets often express opinions about political figures, parties, and events. However, it remains unclear how people form sentiment judgments when only part of a message is initially visible. This study examines how these judgments change as more words are revealed in Nepali political tweets. We use sentiment-labeled tweets from the Sentiment of Election-Based Nepali Tweets dataset, collected around Nepal's 2022 election. Initially, 50% of the words in each tweet are randomly masked. Participants rate the visible text on a continuous sentiment scale from 0 to 5, where 0 is the most negative and 5 is the most positive. Participants then gradually reveal the masked words and may update their rating after each reveal. We record the sequence of ratings, number of reveals, time between reveals, and basic demographic information. The final analytic dataset includes 7,028 submissions from 169 participants across 1,523 unique tweets. The results show that initial sentiment judgments strongly shape later ratings. Although the average final sentiment increased by 0.32 points, the median change was 0.00, indicating substantial persistence of first impressions. Overall, 44.3% of participant-tweet pairs became more positive, 22.7% became more negative, and 33.0% remained unchanged. Compared with the original sentiment labels, the participant's label agreement was 41.7% for the initial masked text, increasing to 52.1% after the final word was revealed; however, this did not fully remove the ambiguity. Additionally, the sentiment state transitions also became more stable after word revelation, with the same category transition probability increasing from 64.9% before any reveal to 78.0% after at least one reveal. Word-level analysis showed that masked and revealed terms were concentrated around election-related concepts such as bhot, nirwachan, yemale, Nepali and Nepal in Nepali language. These findings demonstrate that progressive word reveal is a useful method for studying how partial information, early impressions, and newly revealed linguistic cues interact in human sentiment interpretation, especially for political text in low-resource languages such as Nepali.

Knowledge, Attitude and Preventive Practices Regarding Dengue Fever Among Residents of Slum Area in Butwal Sub-Metropolitan City, Rupandehi

Asha Kunwar¹

¹ Central Department of Statistics (CDS), Tribhuvan University, Kirtipur, Kathmandu Nepal

Corresponding author: kunwarasha74@gmail.com

Keywords: dengue fever; knowledge, attitude and practice, urban slum, Nepal, ordinal logistic regression, knowledge–practice gap

Dengue fever is one of the fastest-spreading mosquito-borne viral diseases in Nepal, with urban slum communities facing increased risk because of overcrowding, unsafe water storage, and inadequate waste management. This community-based cross-sectional study assessed dengue-related knowledge, attitudes, and practices (KAP) among 401 adult residents of a slum area in Butwal Sub-Metropolitan City, Rupandehi District, Nepal, using a structured questionnaire adapted from the WHO KAP Survey Resource Pack. Data were analyzed in R using Bloom's percentage cut-offs, chi-square and Spearman's correlation tests, and logistic regression models.

Almost all participants (99.8%) had heard of dengue; however, knowledge was predominantly moderate (47.6%), with only 32.4% demonstrating good knowledge. Preventive practice was poor among 49.1% of respondents, while only 5.7% exhibited good practice. Knowledge was negatively correlated with preventive practice (Spearman's $\rho = 0.308$, $p < 0.001$), indicating that awareness did not necessarily translate into protective behaviour. Higher educational attainment was the strongest predictor of better knowledge, whereas lower educational attainment was unexpectedly associated with better preventive practices. Age, waste-disposal practices, and dengue history were significant predictors of attitude.

The findings highlight a substantial knowledge–practice gap among slum residents, suggesting that dengue control efforts should combine targeted behaviour-change interventions with improvements in water storage, sanitation, and waste-management infrastructure to promote effective disease prevention.

Multivariate Statistical Modeling for the Analysis of NEPSE Stock Index

Shanti Ram Subedi¹, Rabindra Kayastha¹

¹ *Department of Mathematics, Damak Multiple Campus, Jhapa, Nepal*

² *Department of Mathematics, Kathmandu University, Kavre, Nepal*

Corresponding author: rabindrakayastha@gmail.com

Keywords: NEPSE, Remittance, VECM, LSTM, Macroeconomic variables, Forecasting.

Nepal Stock Exchange (NEPSE) plays a pivotal role in Nepal's financial ecosystem nurturing economic growth, corporate development and investment opportunity. The study of macroeconomic variables impact on the NEPSE Index is significant as it provides keen insight for investors and policy makers to make informed decisions, enhancing market efficiency and economic stability. Accurate stock price prediction remains challenging because financial market exhibits noisy, volatile, complex multifactorial nature of local and global market. Still, building a strong model is now not so far, as driven by progress in AI, access to massive data, and increased computing capabilities. This study aims to construct a predictive model for NEPSE using several new headlines to predict where the closing price would rise or descend after each one-month moment direction. Utilizing a high-density, balanced monthly longitudinal dataset spanning a 15-year horizon (2010–2025, $T = 192$), the research architecture incorporates eight critical exploratory indicators: real Gross Domestic Product (GDP), broad money supply (M2), workers' remittances, domestic consumer price inflation, central bank discount rates, the US dollar exchange rate, international gold prices, and global crude oil shocks. The Johansen trace test confirms the existence of exactly one cointegrating (long-run equilibrium) relationship between NEPSE and the eight macroeconomic variables. The estimated long-run equilibrium relationship indicates that Broad Money Supply (BMS), Gold Price, Exchange Rate, Remittance have statistically significant long-run effects on NEPSE ($p < 0.05$), whereas the interest rate, Inflation rate, GDP, Oil price does not have a statistically significant long-run effect ($p > 0.05$). The short-run dynamics indicate that only the lagged change in remittance significantly influences the current month's change in NEPSE ($p = 0.031$); the short-run effects of the remaining variables are statistically insignificant. The VECM-selected variables achieved similar forecasting performance with a simpler and more stable model, supporting a parsimonious forecasting framework. Hyperparameter tuning improved the performance of all LSTM models, yielding comparable predictive accuracy ($R^2 \approx 0.75$ – 0.80) across different variable sets.

Determinants of Birth Weight in Nepal: A Bayesian Quantile Regression Analysis of Pooled Nepal Demographic and Health Survey 2011–2022 Data

Hari Prasad Upadhyay^{1,7}, Roshan Kumar Mahato^{2,6}, Keshav Raj Bhandari³, Krishna Sagar Sharma⁴, Prativa Sedain⁵, Kyaw Min Htike⁶

¹ Department of Statistics, Birendra Multiple Campus, Tribhuvan University, Bharatpur, Chitwan, Nepal

² Department of Community Medicine, College of Medical Sciences Teaching Hospital, Bharatpur, Nepal

³ Department of Public Health and Community Medicine, Madan Bhandari Academy of Health Sciences, Hetauda, Makawanpur, Nepal

⁴ Pediatric Oncologist, B.P. Koirala Memorial Cancer Hospital, Bharatpur, Chitwan, Nepal

⁵ Department of ENT, B.P. Koirala Memorial Cancer Hospital, Bharatpur, Chitwan, Nepal

⁶ Nepal Public Health Research Consultancy (NPHRC), Kathmandu, Nepal

Corresponding author: hpchalise@gmail.com

Keywords: Low birth weight; Quantile regression; Birth order; Antenatal care; Nepal

Low birth weight (LBW) is a key risk factor for neonatal morbidity and mortality. Conventional regression models estimate only average effects, whereas Bayesian quantile regression examines determinants across the birth weight distribution. This study examines quantile-specific associations of sociodemographic, maternal, and parental factors with infant birth weight in Nepal using pooled Nepal Demographic and Health Survey (NDHS) data from 2011, 2016, and 2022. An analytical cross-sectional study was conducted using the pooled NDHS data. Bayesian quantile regression was used to examine associations at the 5th, 25th, 50th, 75th, and 95th percentiles of birth weight. Noninformative priors were used to estimate posterior means and 95% credible intervals (CrIs). Among 6,601 infants, the prevalence of LBW was 11.85% (95% CI: 11.08–12.65). Female infants had significantly lower birth weights across all quantiles. Infants with birth order 2–3 and ≥ 4 had significantly higher birth weights. Higher household wealth was significantly associated with birth weight, reaching 106.07 g (95% CrI: 97.66–114.52) at the 5th percentile and 134.85 g (95% CrI: 129.21–140.50) at the 95th percentile. Adequate antenatal care (ANC) showed the strongest positive association, increasing birth weight by up to 436.57 g (95% CrI: 428.08–445.53) among mothers with 1–3 ANC visits. Higher parental education and paternal occupation were also associated with increased birth weight. Bayesian quantile regression demonstrated that demographic, socioeconomic, and maternal factors varied across the birth weight distribution. Strengthening antenatal care, improving parental education, reducing socioeconomic inequalities, and prioritizing high-risk pregnancies may improve birth outcomes and reduce the burden of LBW in Nepal.

Foreign Direct Investment and Economic Growth in Nepal: Evidence from ARDL and ARIMA Forecasting Models

Dipen Satyal¹, Bijay Lal Pradhan¹

¹ *Department of Statistics, Amrit Campus, Lainchaur, Tribhuvan University, Nepal*

Corresponding author: dipinsatyal2001@gmail.com

Keywords: Foreign Direct Investment; Economic Growth, ARDL, ARIMA, Forecasting, MAE, RMSE

This study investigates the relationship between foreign direct investment (FDI) and economic growth in Nepal using annual time-series data from 1960 to 2024. The overall macroeconomic dataset spans 1960–2024, while the FDI series is obtained from the World Bank’s World Development Indicators and is available from 1972 to 2024, with some missing observations in the earlier period. FDI is measured as net inflows as a percentage of GDP and represents realized investment flows recorded in the balance of payments, rather than approved, committed, or allocated FDI amounts. Employing the Autoregressive Distributed Lag (ARDL) bounds testing approach, the analysis examines both short-run dynamics and long-run equilibrium relationships between GDP growth and FDI. The empirical results reveal that FDI does not exert a statistically significant effect on economic growth in the short run. However, the bounds test confirms the existence of a stable long-run co-integrating relationship between FDI and GDP growth. The estimated error correction model indicates rapid adjustment toward long-run equilibrium, suggesting that deviations caused by short-term shocks are corrected swiftly, albeit with evidence of overshooting behavior. Structural break analysis further identifies regime changes in Nepal’s growth trajectory. Specifically, the Bai–Perron procedure identifies a single optimal structural break in the GDP growth series, separating an earlier lower-average-growth regime from a subsequent higher-average-growth regime. To assess predictive performance, the forecasting accuracy of the ARDL model is compared with that of an ARIMA framework using Mean Absolute Error (MAE) and Root Mean Square Error (RMSE). The results indicate that the ARDL model provides marginally superior forecasting accuracy relative to the ARIMA model. Overall, the findings suggest that while FDI does not stimulate immediate economic growth in Nepal, its long-run contribution depends critically on domestic absorptive capacity, institutional quality, and policy stability.

Predicting the Real GDP and Its Growth Rate at Producer's Price for Next Five Years: Macroeconomic and Financial Situation

Puja Kandel ¹

¹ *Central Department of Statistics, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: kdlpooja1@gmail.com

Keywords: Real GDP, Economic Forecasting, ARIMA Model, Time Series Analysis, Monte Carlo Simulation

This study aims to forecast Nepal's Real Gross Domestic Product (GDP) growth rate at producer's price for the next five fiscal years (2025/26 to 2029/30) using the Box-Jenkins ARIMA methodology and Monte Carlo simulation techniques. Annual Real GDP data from fiscal year 1974/75 to 2024/25 obtained from Nepal Rastra Bank were analyzed. The study also examined the relationship between nominal and real GDP growth rates. Descriptive statistics, correlation analysis, linear regression, and time series forecasting methods were employed using R software. The findings reveal a moderate positive relationship between nominal and real GDP growth rates, with a Pearson correlation coefficient of 0.54. Regression results indicate that nominal GDP growth significantly predicts real GDP growth, although it explains only about 28.4% of its variation, suggesting a substantial influence of inflation and other economic factors. For forecasting, the ARIMA(2,0,0) model was identified as the most suitable model based on diagnostic tests and information criteria. The model projects a stable real GDP growth rate of approximately 4.3% to 4.4% annually over the next five years. To quantify forecast uncertainty, a Monte Carlo simulation with 2,000 future paths was conducted. The simulation estimated a 75.2% probability that real GDP growth will exceed 6% at least once during the forecast period and a 99.3% probability that real GDP will surpass 3,000,000 million rupees. The study concludes that Nepal's economy is expected to maintain moderate and stable growth in the coming years, although considerable uncertainty remains. The results highlight the importance of effective inflation management and macroeconomic stability to support sustainable real economic growth and improve the reliability of economic forecasting.

Impact of Electronic Human Resource Management Practices on Employees' Job Satisfaction in the Banking Sector

Shankar Kumar Rawat¹

¹ *Morgan International College, Kathmandu, Nepal*

Corresponding author: shankarkumar.rawat@gmail.com

Keywords: Commercial banks, E-HRM practices, Employees' job satisfaction, Internet and productivity

The study aims to examine the impact of electronic human resource management (e-HRM) practices, focusing on e-recruitment, e-selection, e-compensation, e-learning and training, e-performance appraisal, and e-communication, on employees' satisfaction in commercial banks in Kathmandu. Structured questionnaires were used to collect data from 401 respondents working in commercial banks in Kathmandu District. The data were analyzed using SPSS version 25. Multiple regression analysis was conducted to predict employees' satisfaction from six independent variables: e-recruitment, e-selection, e-compensation, e-learning and training, e-performance appraisal, and e-communication. The findings indicate that employee satisfaction and e-HRM practices are positively correlated. The implementation of e-HRM systems in the banking industry can encourage employee achievement, which in turn leads to increased job satisfaction. E-HRM facilitates the achievement of strategic corporate goals by enhancing employee satisfaction. E-HRM practices also create a conducive work environment in which employees develop positive attitudes toward the organization. High job satisfaction among bank employees enhances productivity, organizational citizenship behavior, and organizational commitment, while decreasing absenteeism, employee turnover, and job-related stress. Hence, a high-performing e-HRM system may be useful for commercial banks to maintain harmony between employees' personal goals and organizational goals.

Cubic Transmuted Nadarajah-Haghighi Distribution: Properties, Estimation and Application

Hom Nath Baral^{1,2}, Surinder Kumar¹, Siddharth¹

¹ *Department of Statistics, Babasaheb Bhimrao Ambedkar University, Lucknow, India*

² *Graduate School of Science and Technology, Mid-West University, Birendranagar, Surkhet, Nepal*

Corresponding author: hombabaral277@gmail.com

Keywords: Cubic transmutation map, Cubic rank transmuted Nadarajah-Haghighi distribution, Maximum product spacing, Reliability analysis, Markov chain Monte Carlo

This article suggest a new distribution, namely the cubic transmuted Nadarajah-Haghighi (CRT-NH) distribution by using cubic rank transmutation map. Various statistical properties such as pdf, reliability function, hazard function and its graphic, moment, moment generating function and order statistics of new distribution are examined. Estimation methods include maximum likelihood estimation (MLE), maximum product spacing (MPS), least squares estimation (LSE) for estimating the unknown shape, scale and transmutation parameters of the proposed model. A simulation study based on the Metropolis- Hastings Markov chain Monte Carlo (MCMC) algorithm is conducted to assess the performance of the estimators. Finally, a real data application is presented to demonstrate the flexibility and applicability of the proposed distribution.

Adaptation Strategies as Mediators of the Effects of Economic, Socio-cultural, and Environmental Drivers on Migration Intentions in Nepal

Madhab Prasad Baral¹, Vikash Kumar K. C.¹

¹ *Department of Statistics, Pritivi Narayan Campus, Tribhuvan University, Nepal*

Corresponding author: madhavbaral15776@gmail.com

Keywords: Migration intention, Economic, Socio-cultural, Environmental impact, Adaptation

Migration has become one of the most pressing global issues of the twenty-first century. People's migration intentions are shaped by economic, sociocultural, demographic, and environmental factors. This study investigates how perceptions of the economic, sociocultural, and environmental impacts of migration influence individuals; intentions to migrate as an adaptive response to climate change in Gandaki Province, Nepal. A survey was conducted among 493 residents in four districts (Baglung, Myagdi, Mustang, and Lamjung) of Gandaki Province to explore residents; perceptions of the drivers of migration (economic, sociocultural, and environmental) and their adaptation practices in relation to migration intention. Perceptions were collected through a structured questionnaire and measured on a five-point Likert scale. Partial Least Squares Structural Equation Modeling (PLS-SEM) was used to assess the effects of migration drivers and climate change adaptation on migration intention. This study examines whether migration intention is significantly influenced by adaptation to climate change and by the economic, sociocultural, and environmental impacts of migration. It also examines whether adaptation to climate change is influenced by the economic, sociocultural, and environmental impacts of migration. Adaptation to climate change plays a significant mediating role between environmental factors and migration intention, but not between the other drivers (economic and sociocultural) and migration intention. Hence, policy must be revised to develop effective adaptive strategies to mitigate its role in reducing people's intention to migrate.

Neurodevelopment Outcomes of Neonates with Document Sepsis-A Prospective Cohort Study

Swechhya Vaidya^{1,2}, Manu Raj^{3,4}, Remya Sudevan⁴, Shailendra Bir Karmacharya⁵, Kalpana Subedi⁵, Ganendra Bhakta Raya⁶, Dhurba Shrestha⁶

¹ Department of Health Science Research, Amrita Institute of Medical Science & Research Centre, Kochi, Kerala, India

² Department of Community Health Sciences, Patan Academy of Health Sciences, Kathmandu, Nepal

³ Division of Pediatric Cardiology, Amrita Institute of Medical Science & Research Centre, Kochi, Kerala, India

⁴ Department of Health Science Research, Amrita Institute of Medical Science & Research Centre, Kochi, Kerala, India

⁵ Department of Neonatology, Paropakar Maternity and Women's Hospital, Kathmandu, Nepal

⁶ Department of Pediatrics, Siddhi Memorial Foundation, Bhaktapur, Nepal

Corresponding author: swechhyavaidya@pahs.edu.np

Keywords: Neonatal Sepsis, Neuro development, Developmental Delay, Infant Health Low and Middle Income Countries (LMICs)

Neurodevelopmental outcomes in neonates are influenced by factors such as prematurity, congenital and genetic disorders, cardiac conditions, low birth weight and neonatal sepsis. Research from developing countries and low resource settings is limited. In Nepal, no such study assessing the impacts of neonatal sepsis on neurodevelopment has been reported. Understanding these impacts are crucial for early identification of high risk infants and timely interventions. This study aimed to evaluate the effect of neonatal sepsis on neurodevelopmental outcomes, provide context specific evidence to guide clinical care, follow up strategies, rehabilitation programs, and public health policies, ultimately reducing long term morbidity. The study was conducted from February 2023 to November 2025 using a prospective dual-centric cohort design at Paropakar Maternity and Women's Hospital and Siddhi Memorial Hospital. A total of 312 neonates were enrolled through non-probability purposive sampling. Neonates with documented sepsis attending the two study centers were included. Exclusion criteria comprised severe life-threatening conditions unrelated to sepsis, hypoxic-ischemic encephalopathy grade II or III, major congenital, genetic, or metabolic disorders, and extreme prematurity (<28 weeks) or birth weight <800g. Baseline sociodemographic, maternal, and neonatal data were collected. Neurodevelopmental outcomes were assessed at six months and one year after discharge using the Developmental Assessment Scale for Indian Infants (DASII). Statistical analysis was performed using SPSS v 25, applying descriptive statistics, bivariate analysis, and multivariable logistic regression to estimate prevalence, assess associations, and identify independent predictors of neurodevelopmental delay, with $p < 0.05$ considered statistically significant. Ethical approval was taken Nepal Health Research Council. At six months follow up, neurodevelopmental assessment among 285 infants who survived neonatal sepsis showed motor delay in 20.1%, mental delay in 17.2%, combine motor and mental delay in 11.9%, and any delay in 25.3%. By one year follow up, among

269 infants, motor delay decreased to 13% and mental delay to 5.9%. Motor delay was most common in the neck control cluster at 6 months (36.1%) and in the body control cluster at 1 year (66.9%). Mental delay was highest in the memory cluster at both 6 months (22.5%) and 1 year (68.8%). At 6 months, higher odds of developmental delay were significantly associated with intrauterine growth retardation (aOR = 2.82), gestational diabetes mellitus (aOR = 3.69), postnatal steroid use (aOR = 2.49), and neonatal seizures (aOR = 2.92). At 1 year, antenatal steroid exposure (aOR = 10.08) and neonatal seizures (aOR = 4.17) were the strongest predictors of developmental delay. In this prospective cohort study nearly one-fourth of the neonates who survived documented sepsis demonstrated neurodevelopmental delay at six months. Although the proportion of affected infants declined by one year, one sixth of them continued to have developmental difficulties. Motor delays were most evident in neck and body control, while memory was notably impaired in the mental domain. Intrauterine growth restriction, maternal gestational diabetes, antenatal steroid exposure, and neonatal seizure were significant risk factors for poor outcomes. This study emphasized the importance of early screening, structured follow-up, and timely interventions for septic neonates to improve long term neurodevelopmental outcomes in Nepal.

Study of Statistical Properties of a Non-Monotonic Hazard Model: An Application to Real-Life Data from Engineering and Medical Sciences

Abhiraj Bhattacharya¹, Brijesh P. Singh¹

¹ *Department of Statistics, Institute of Science, Banaras Hindu University, Varanasi, India*

Corresponding author: abhiraj.stat.2025@bhu.ac.in

Keywords: Inverted U-shaped hazard, MLE, AIC, KS-test

In this paper we have introduced a new two-parameter continuous distribution with a nonmonotone hazard. Various statistical properties of the distribution, such as MLE, entropy, stochastic ordering, order statistics and ageing intensity have been studied. A simulation study has also been carried out to evaluate the performance of the point and interval estimates derived using maximum likelihood estimation. Furthermore, datasets generating out of real-life situations have also been used to assess the applicability of the distribution. The usefulness of the distribution has been checked by -2loglikelihood, AIC, CAIC and the Kolmogorov-Smirnov test, and we have found that the proposed distribution fits adequately and can be used as an alternative to some well-known distributions.

Exploring Timing of Most Recent Conception: A Data Driven Stochastic Modeling

Brijesh P. Singh¹

¹ *Department of Statistics, Institute of Science, Banaras Hindu University, Varanasi, India*

Corresponding author: brijesh@bhu.ac.in

Keywords: Stochastic model Timing of conception Most recent birth Maximum likelihood estimation

The conception stage is a critical moment in a woman's life, where insufficient attention may result in negative outcomes such as miscarriage and enduring health consequences that are a crucial driver of a nation's overall growth, necessitating vigilant monitoring of reproductive health outcomes. A significant metric in this context is the timing of birth/conception, which signifies both reproductive patterns and maternal health. The primary aim of this study is to analyze the timing of conception and thus fecundability for the most recent birth among women in Uttar Pradesh, India, utilizing data from the National Family Health Survey (NFHS) and focusing on selected indicators through some proposed stochastic models. This study assesses the waiting time to the most recent closed birth among women utilizing stochastic models such as length-biased exponential distribution (LBED), length-biased exponential gamma distribution (LBEGD) and modified mixed exponential distribution (MMED). The estimate of the parameters has been obtained through the maximum likelihood estimation procedure. The models were utilized on data from Uttar Pradesh and the Varanasi district and thereafter expanded to examine temporal trends over three rounds of the National Family Health Survey. The investigation examined demographic and socio-economic disparities, encompassing women's age, parity, sex of the most recent child, religion, caste, and residential location. The findings demonstrate that the proposed models well fit the data, revealing that over the years, the average waiting time to conception has risen, while fecundability has decreased across the majority of categories. These findings emphasize changing reproductive dynamics and reinforce the necessity for focused policy measures to enhance maternity and child health services.

Ranking Strategic Retail Items by Transaction Quality: Matched Excess Extra-Category Attached Value

Shusan Khatiwada¹, Sulav Pokharel¹, Nayan Pandey¹, Bhumika Magar¹

¹ *Independent Researcher, Kathmandu, Nepal*

Corresponding author: shusankhatiwada10@gmail.com

Keywords: Market basket analysis, Transaction quality, Coarsened exact matching, Average treatment effect on the treated, Empirical Bayes shrinkage, Assortment planning; Retail analytics

Merchants protect exclusives and everyday staples on the belief that those SKUs sit in better rest-of-store trips. That belief is rarely turned into an item rank. Pairwise lift cannot do it: the statistic needs a partner SKU, so a unique with no chosen consequent has no score. Ticket averages and blended indexes leave own price in the outcome and mix unlike shopping occasions, so an expensive good or a Saturday stock-up looks like quality by construction.

We take leftover revenue after the item and its subcategory come off the ticket, and compare it with trips that never carried the item but share a store cluster, week of year, weekday, and daypart. Store identity is too fine—cells empty—and basket size is the leftover itself, so neither enters the match. We call the difference excess extra-category attached value (EAV). Uniques are not interchangeable, so noisy estimates shrink toward zero rather than a peer mean. Rank is withheld unless treated volume and match rate clear preset gates. Total excess attached value (TEAV) scales EAV by trip count and must not be summed. A margin analogue (EAM) sits beside EAV and is never averaged with it. Language stays on matched association, not availability incrementality.

A stylized annual table shows why this ordering is built to disagree with sales, basket value, and lift. Lift stays the adjacency tool. The residual rank is a dollar score of rest-of-basket association that does not need a driving item. A live comparative study is left to subsequent work.

Statistical Insight and Human-Centered Data Science: Reimagining Governance, Risk, and Development Pathways in Nepal's Federal Transition

Purna Bahadur Karki¹

¹ *Institute of Global Studies, Tokyo University of Foreign Studies, Tokyo, Japan*

Corresponding author: purna73@hotmail.com

Keywords: Human-Centered Data Science, Bayesian Modeling, Spatial Analytics, Climate and Risk Data, Federalism and Evidence Based Policy, Ethical and Responsible AI Systems.

Nepal's federal transition has unfolded alongside an unprecedented expansion in data availability, computational capacity, and analytical innovation. As governments confront complex challenges—from climate vulnerability and public health disparities to administrative fragmentation and uneven development—statistics and data science have become essential tools for shaping responsive and human-centered governance. This study advances a data-driven governance framework by integrating empirical evidence from nationally representative datasets and applying modern statistical and machine learning models to Nepal's evolving federal context. The empirical analysis draws on multiple sources, including the Nepal Living Standards Survey (NLSS), Demographic and Health Survey (DHS), Local Governance and Accountability Survey (LGAS), and gridded climate datasets from NASA and ICIMOD. Using Bayesian hierarchical modeling, spatial autoregressive models, and small area estimation techniques, the study identifies district level patterns of climate risk, health vulnerability, and service delivery disparities. Machine learning approaches—random forests and gradient boosting are employed to model multi-dimensional governance outcomes, while GenAI-assisted text analytics are used to examine municipal planning documents and citizen feedback. Findings demonstrate how statistical rigor and modern data science illuminate localized vulnerabilities, support targeted interventions, and enhance transparency across federal, provincial, and local institutions. At the same time, the analysis underscores the human dimension of data: the lived experiences behind indicators, inequalities embedded in datasets, and the need for interpretability and accountability in algorithmic decision-making. By situating Nepal's experience within global trends in statistics and data science, the paper proposes a roadmap for strengthening analytical ecosystems that are technically robust and socially responsive. Ultimately, it calls for a data future where empirical evidence, statistical insight, and human-centered design work together to support equitable development and resilient governance.

Wealth on Paper, Poverty in Pocket: A Latent Class and Ordinal Logit Analysis of Subjective Economic Well-Being in Nepal

Govind Jnawali¹, Rabindra Kayastha²

¹ Butwal Multiple Campus, Tribhuvan University, Nepal

² Department of Mathematics, Kathmandu University, Nepal

Corresponding author: jnawali.govinda@gmail.com

Keywords: Asset-rich, Cash-poor, Latent class analysis, Subjective economic well-being, Liquidity vulnerability, Ordinal logistic regression

Land and housing values are considered informal proxy indicators of household's wealth in Nepal, but many households in Nepal who have substantial fixed assets also struggle in the process of providing cash for their daily needs. This study examines the complexities of this "asset rich, cash poor" phenomenon, which can be hard to capture with traditional measures of poverty. The study used primary survey data from 207 households to analyze eight indicators of household financial resiliency using a technique called Latent Class Analysis (LCA): housing-status congruence, cash-flow stability, urban cost pressures, discretionary spending capacity, emergency liquidity, mandatory-expense burden, and confidence in assets as crisis insurance. The majority group (58.5%) is the Asset-Rich, Cash-Poor class, in which liquidity is constrained despite their substantial assets, reflecting economic instability; the Deprived class (14.0%) has chronic liquidity problems; the Constrained class (27.5%) has moderately constrained economic conditions. The results of the ordinal logistic regression showed that class membership was highly correlated with the self-assessed economic status. The Deprived and Constrained classes were significantly more likely to consider themselves to be poor than the Cash-Poor class ($p < .001$). Importantly, 97.5% of Asset-Rich, Cash-Poor households self-rated as "Middle" were identified as having asset-based poverty, but lacked liquidity. These findings underscore the fact that asset-based measures can mask important financial vulnerabilities among households that might be considered middle class in Nepal.

Factors Associated with Health-Symptoms Among Agrochemical-Using Farmers in Bharatpur Metropolitan City, Chitwan

Samir Chapagain¹

¹ *Birendra Multiple Campus, Bharatpur, Chitwan, Nepal*

Corresponding author: chapagainsamir04@gmail.com

Keywords: Agrochemical, Knowledge, Attitude, Safety practice, Health-symptoms

This study examined the use of pesticides and chemical fertilizers, knowledge, attitude, safety practices, personal protective equipment (PPE) use, and self-reported health-symptoms among agrochemical-using vegetable farmers in Wards 25, 26, 27, and 28 of Bharatpur Metropolitan City, Chitwan. A cross-sectional survey design was used, and data were collected through face-to-face interviews from 110 eligible vegetable farmers selected using purposive sampling. The data were analyzed using IBM SPSS Statistics. Frequencies and percentages were used for categorical variables, while means and standard deviations were used for composite scores. Pearson's chi-square test of independence was used to examine associations between socio-demographic characteristics, knowledge, attitude, safety practice, and health-symptom level at the 5% significance level. All respondents reported using insecticides and fungicides, while 84.5% reported using herbicides. Urea and DAP were each reported by 99.1% of respondents, and potash by 93.6%. The mean knowledge score was 9.30 ± 2.03 , with 48.2% classified as having good knowledge and 51.8% as having poor knowledge. The mean attitude score was 4.91 ± 1.05 ; 66.4% of respondents had a favourable attitude and 33.6% had a less favourable attitude. The mean safety-practice score was 6.72 ± 3.09 , with 50.9% classified as having good safety practices and 49.1% as having poor safety practices. The mean health-symptom score was 4.07 ± 3.22 , with 53.6% of respondents classified as having lower symptoms and 46.4% as having higher symptoms. All socio-demographic variables showed no association with health symptoms, as the reported p-values were greater than 0.05. Knowledge was not significantly associated with health-symptoms ($\chi^2 = 3.062$, $df=1$, $p = .080$), and attitude was also not significantly associated with health-symptoms ($\chi^2 = 1.326$, $df=1$, $p = .250$). In contrast, safety practice was significantly associated with health-symptoms ($\chi^2 = 24.859$, $df=1$, $p < .001$). The findings suggest that improving safe agrochemical-handling practices should be a priority in the study area. Because the study was cross-sectional and based partly on self-reported information, the observed associations should not be interpreted as causal relationships.

Seasonality Trends in Child Deaths in India: A Directional Statistical Approach

Abhishek Saraswat¹

¹ *Department of Statistics, Banaras Hindu University, Varanasi, Uttar Pradesh, India*

Corresponding author: abhi.stata@bhu.ac.in

Keywords: Child death, Seasonal variation, Rao's spacing test, Rayleigh test

Seasonal variation in child deaths (deaths of children under five years of age) carries important implications for child health policy, yet identifying when and why deaths cluster across the calendar year requires methods that respect the cyclical nature of monthly data. This study applied circular statistical methods to examine seasonal patterns in the distribution of child deaths in India, analysing data disaggregated by state, year, religious group, and caste category using birth recode data from the National Family Health Survey (NFHS-5), covering the period 2015 to 2020. Rao's spacing test was used as the primary test of seasonal non-uniformity, supported by the Rayleigh test as a secondary measure of unimodal directional concentration. Rao's spacing test confirmed statistically significant seasonal clustering in the distribution of under-five deaths across all nineteen states, all six study years, all three religious groups, and all four caste categories examined. The Rayleigh test reached significance in only five states and two years, a systematic divergence explained by the three to five distinct monthly peaks identified in most analytical units. This multi-peak structure causes directional vector cancellation in the Rayleigh framework, artificially suppressing the mean resultant length and inflating p-values. This divergence itself is an epidemiologically meaningful finding: it confirms that under-five deaths in India are not driven by a single seasonal hazard but by the simultaneous operation of multiple disease pathways on overlapping seasonal calendars. Waterborne and vector-borne diseases including diarrhoea, malaria, and dengue drive monsoon-period peaks (June–September); acute respiratory infections dominate the winter months (December–February); heat stress and early diarrhoeal illness characterise the pre-monsoon period (March–May); and residual vector activity extends into the post-monsoon months (October–November). After accounting for the unequal lengths of calendar seasons, the apparent monsoon dominance widely reported in prior literature was shown to be a methodological artefact rather than a genuine epidemiological signal. Among social groups, Scheduled Tribes carried the highest absolute count of deaths across all seasons, reflecting compounding vulnerabilities of geographic remoteness, nutritional risk, and limited healthcare access. The anomalous pattern observed in 2020 with elevated death counts concentrated in the post-monsoon months is consistent with documented disruptions to child healthcare access and immunisation programmes during the COVID-19 pandemic. These findings indicate that child health programmes concentrated on the monsoon season alone will miss a substantial share of preventable deaths. Year-round service delivery, with targeted intensification during identified peak periods, is more appropriate for most Indian states than seasonally focused campaigns.

Statistical Modelling of Anxiety Level Among Public and Private Students at Higher Secondary Level

Himani Neupane¹

¹ *Birendra Multiple Campus, Tribhuvan University, Bharatpur, Chitwan, Nepal*

Corresponding author: himanineupane846@gmail.com

Keywords: Anxiety, Beck anxiety inventory, Higher secondary students, Institutional type, Academic stream

Anxiety is an important psychological concern among higher secondary students who may experience academic demands, examination-related concerns, career expectations, and psychosocial pressures. This study aimed to assess anxiety levels and statistically model factors associated with anxiety among public and private higher secondary students of Bharatpur Metropolitan City, Chitwan. A quantitative analytical cross-sectional study was conducted among 300 Grade 11 and Grade 12 students from Science and Management streams selected using multistage sampling. Anxiety was assessed using the Beck Anxiety Inventory (BAI). Descriptive statistics, independent-samples t-test, two-way analysis of variance, bivariate analysis, and multiple linear regression were used for statistical analysis. Separate regression models were developed for public and private colleges. The mean BAI score was 19.22 ± 11.35 , ranging from 0 to 63. About 60.6% of students experienced moderate-to-severe anxiety. Public-school students had significantly higher mean BAI scores than private-school students (21.90 ± 11.32 vs. 17.06 ± 10.94 , $p = .001$), whereas the difference by academic stream was not significant ($p = 0.647$). Two-way ANOVA showed significant effects of college type ($p = 0.001$) and its interaction with academic stream ($p = 0.028$). The regression model identified fear of result, sleep duration, and female gender as significant predictors of anxiety in public schools, while birth order, fear of result, family-related factors, sleep duration, and perceived course difficulty were associated with anxiety in private schools. The findings demonstrate that anxiety is common and is associated with multiple academic, familial, and psychosocial factors, with patterns varying by institutional type.

An Extended Technology Acceptance Model (TAM) For Behavioral Intention To Adopt Digital Payment: A Study Of University Students

Saurav Raj Paudel¹

¹ *Birendra Multiple Campus, Tribhuvan University, Bharatpur, Chitwan, Nepal*

Corresponding author: sauravpaul98476@gmail.com

Keywords: Digital payment, Technology Acceptance Model (TAM), behavioral intention, university students, PLS-SEM, predictive relevance.

The rapid expansion of digital payment systems in Nepal has increased the need to understand the factors influencing their adoption, particularly among university students. This study examines university students' behavioral intention to adopt digital payment systems using an extended Technology Acceptance Model (TAM) incorporating trust, perceived risk, facilitating conditions, and subjective norms. Data were collected through a structured questionnaire from 401 university students in Nepal and analyzed using Partial Least Squares Structural Equation Modeling (PLS-SEM). The measurement model demonstrated satisfactory reliability and validity. All indicator loadings exceeded the recommended threshold of 0.70, while Cronbach's alpha and composite reliability values were greater than 0.70, confirming internal consistency reliability. The average variance extracted (AVE) values exceeded 0.50, establishing convergent validity, while discriminant validity was confirmed using the Fornell–Larcker criterion and Heterotrait–Monotrait (HTMT) ratio. The structural model supported 7 of the 11 proposed hypotheses. Perceived ease of use significantly influenced perceived usefulness and attitude toward using digital payments, while perceived usefulness positively influenced attitude. Attitude toward using digital payments had the strongest direct relationship with behavioral intention. Trust positively influenced perceived usefulness, perceived risk negatively influenced trust, and facilitating conditions positively influenced behavioral intention. However, perceived usefulness, trust, perceived risk, and subjective norms did not have significant direct relationships with behavioral intention. Predictive relevance was established as the Q^2 value for behavioral intention was 0.227 ($Q^2 > 0$), indicating that the model has predictive relevance. Overall, the findings indicate that digital payment adoption among university students is a multidimensional process, with attitude, perceived ease of use, and facilitating conditions playing important roles. The extended TAM provides a useful framework for understanding digital payment adoption among university students in Nepal.

Factors Affecting Child Nutritional Status In Nepal: A Secondary Data Analysis Using Nepal Demographic & Health Survey (NDHS) 2022

Ashok Upadhyay¹

¹ *Birendra Multiple Campus, Tribhuvan University, Bharatpur, Chitwan, Nepal*

Corresponding author: ashokchalise56@gmail.com

Keywords: Child malnutrition, stunting, wasting, underweight, NDHS 2022, Nepal

Child malnutrition remains a critical public health challenge in Nepal, with persistent disparities across socioeconomic and geographic groups. This study examines factors associated with stunting, wasting, and underweight among children aged 0–59 months in Nepal using child, maternal, household, and community-level characteristics. Data were drawn from the Nepal Demographic and Health Survey (NDHS) 2022, comprising a sample of 2,202 children with complete anthropometric measurements.

Nutritional status was assessed using three indicators—stunting (height-for-age), wasting (weight-for-height), and underweight (weight-for-age)—based on WHO Child Growth Standards. Descriptive statistics and Chi-square tests were employed to examine associations between selected factors and child nutritional outcomes. The findings indicate that child age, birth order, size at birth, maternal education, maternal age, maternal employment status, household wealth, sanitation facility, place of residence, and province were significantly associated with one or more forms of malnutrition.

Stunting and underweight were highest among children aged 24–35 months, whereas wasting was most prevalent among children aged 6–11 months. Children from poorer households, those with unimproved sanitation, and those living in rural areas experienced higher levels of malnutrition. Significant provincial disparities were also observed, with Karnali reporting the highest stunting prevalence and Madhesh reporting the highest wasting and underweight prevalence. In contrast, sex of the child and source of drinking water did not show statistically significant associations with any nutritional outcome. The findings underscore the multidimensional nature of child malnutrition in Nepal and highlight the importance of maternal education, improved household socioeconomic conditions and sanitation, and geographically targeted interventions in addressing child undernutrition.

Determinants of Graduate Students' Satisfaction with Facilities and Services at the Central Departments of Institute of Science and Technology, Tribhuvan University

Neha Rai¹

¹ *Central Department of Statistics, Tribhuvan University, Nepal*

Corresponding author: nrai9402@gmail.com

Keywords: Student Satisfaction, SERVPERF Model, Higher Education, Graduate Students, PLS-SEM

This Study argues that the existing frameworks of student satisfaction in higher education, while being widely applied, have a greater emphasis on material facilities and structural resources with little consideration of relational and experiential aspects in shaping student perceptions. This study uses the adapted SERVPERF model and a census-based sample of 321 third-semester master's degree students in the 13 Central Departments of the Institute of Science and Technology (IoST). The study uses Partial Least Squares Structural Equation Modeling (PLS-SEM) to assess the impact of six dimensions of service quality: Tangible, Assurance, Reliability, Responsiveness, Empathy, and Extracurricular Activities, on overall student satisfaction.

The results show that the only statistically significant predictor of student satisfaction is Empathy, which includes such sub-elements as support of the faculty, fairness, accessibility, and individual academic care. In contrast, the conventional dimensions, such as Tangibles, Reliability, and Responsiveness, do not differ significantly, indicating that in situations where infrastructural constraints are present, students are oriented toward valuable human interaction rather than physical or administrative facilities.

The findings confirm that student satisfaction is a multi-dimensional phenomenon, yet Nepalese higher education is affected less by infrastructural adequacy and more by considerable academic support, teacher-student interaction, and relational caring. Thus, this study contributes to the broader literature by challenging facility-centered models of satisfaction and illustrating the usefulness of relational quality for explaining and improving student experience.

Analyzing Factor Associated With Most Recent Closed Birth Interval Using Classification and Regression Tree Modelling Approach

Ayushi Chourasiya¹, Brijesh Pratap Singh¹

¹ *Department of Statistics, Banaras Hindu University, Varanasi, Uttar Pradesh, India*

Corresponding author: statsayushi@bhu.ac.in

Keywords: Most recent closed birth interval, Multinomial regression, Classification and Regression Tree (CART)

The study on most recent closed birth interval is of immense importance for a country like India. Among the several birth intervals, the most recent closed birth interval is determined to be more essential than others to know the recent fertility pattern. The present study was undertaken to examine the effect of several parameters like age at marriage, age at first birth, religion, caste, parity, sex of the kid, education, residence, contraceptive usage, and wealth index on Most recent closed birth interval. A multinomial logistic regression and Classification and Regression Tree modelling technique (CART) survival tree method are employed to accurately examine the effect of specified factors on MRCBI. Multinomial logistic regression identified age at marriage, age at first birth, present age, and survival status of prior kid as the key factors of birth interval. Women who married and started childbearing at older ages were more likely to have short birth intervals. Older women were more likely to have long birth intervals. Survival of preceding kid lowered the chances of short birth intervals and raised the chances of lengthy birth intervals. The CART model confirmed these findings and identified maternal age, reproductive history, and child survival status as the most relevant determinants of birth interval. The combination of multinomial logistic regression and CART allows for a full knowledge of birth interval dynamics and can help to identify women at risk of poor birth spacing, which can in turn enable targeted maternal and child health interventions and family planning initiatives.

Statistical Distribution of Annual Tree Growth in the Nepal Himalaya

Bidur Nepal¹, AK Chaudhary²

¹ Central Department of Statistics, Tribhuvan University, Kirtipur, Nepal

² Department of Statistics, Nepal Commerce Campus, Minbhawan, Kathmandu, Nepal

Corresponding author: bnepalpatan027@gmail.com

Keywords: Annual ring width, Dendrochronology, Gamma distribution, Himalayan forests, Lognormal distribution, Statistical modeling, Tree growth

Annual tree-ring width is a fundamental measure of radial growth in dendrochronology, yet its statistical distribution is rarely examined prior to selecting growth or climate-response model. Although Nepalese forests provide critical ecosystem services including fuelwood and timber, they are increasingly affected by climate change. However, quantitative growth data of many tree species of Nepal remain scarce, and dendrochronological applications, particularly in time series analysis, are still underexplored. To address this gap, this study provides results on quantitative growth and its distribution characteristics of 12 tree species across 63 sites in the Nepal Himalayan, with individual tree ages ranging from approximately 50 to over 1,100 years. The sampled trees had a mean age of 70 years and a mean radial growth rate of 2.07 mm/year. Preliminary analysis revealed that growth distribution were right-skewed and does not conform to normality. For methodological illustration, the study constructed a synthetic dataset representing 20 trees measured annually from 1996 to 2020 ($n = 500$), designed to mimic the positive, moderately right-skewed growth patterns typical of Himalayan conifers. Four continuous probability distributions- Normal, Lognormal, Gamma, and Weibull, were compared using Maximum likelihood estimation to select the best-fitting distribution. The Gamma distribution was selected as the best based on the lowest AIC (1297.4), indicating the best relative fit among the candidate models. The findings underscore that annual growth is inherently non-negative and often asymmetric; therefore, distribution diagnostic should precede any regression, time-series, or hierarchical modeling. In practice, use cross-dated tree-ring measurements from Nepal Himalayan sites to compare observed and fitted distributions using goodness-of-fit criteria. synthetic data must be replaced by cross-dated field measurement, followed by appropriate detrending and assessment of temporal autocorrelation. This study provides a reproducible statistical framework for evaluating growth distributions and for selecting probability models suited to subsequent climate-growth analyses in the Nepal Himalayan.

An Investigation of Reproductive Complications and Intrauterine Device Users in Uttar Pradesh, India

Anushka Singha¹

¹ *Department of Statistics, Banaras Hindu University, Varanasi, Uttar Pradesh, India*

Corresponding author: anushkasingh.stat.2025@bhu.ac.in

Keywords: Reproductive complications, IUD users, NFHS-5, Logistic regression

Intrauterine devices (IUDs) are an invasive method of modern family planning. It is evident that the use of IUDs leads to reproductive complications such as vaginal discharge, irregular menstruation, bad odour, etc. The occurrence of reproductive complications varies across different demographic and socioeconomic groups. The purpose of this study is to examine the sociodemographic determinants of reproductive complications and use of IUDs using NFHS-5 data. The information was collected from women surveyed in the National Family Health Survey (NFHS-5) to evaluate reproductive complications. The study used bivariate analysis and logistic regression to examine the individual and household characteristics—including maternal age, place of residence, caste, religion, wealth index, parity, and educational attainment—associated with reproductive complications among IUD users compared to the total population. Findings reveal that reproductive complications are heavily concentrated among specific vulnerable subgroups. Younger women under the age of 25 and primiparous women using IUDs experience substantially higher rates of reproductive complications compared to older and higher-parity cohorts. Socioeconomic and geographic factors also serve as strong predictors: women residing in rural areas, those belonging to marginalised castes (SC/ST), and those from the poorest wealth quintiles face a notably higher burden of complications than their urban, general-caste, and wealthier counterparts. Higher reported complications among educated women further indicate the role of symptom awareness and health literacy in reporting adverse reproductive events. Results reveal that reproductive complications among IUD users are significantly influenced by maternal age, parity, wealth index, caste, place of residence, religion, and educational level. This study specifies the need for adequate pre-insertion clinical counselling, skilled provider training in rural and resource-limited settings, and routine post-insertion follow-up to improve contraceptive safety and reproductive healthcare.

People's Knowledge of Climate Change's Impact on Tourism in the Annapurna Conservation Area, Nepal, by Developing A Climate Change Knowledge Index

Rajendra Prasad Upadhyaya¹, Vikash Kumar K.C.¹

¹ *Department of Statistics, Prithvi Narayan Multiple Campus, Pokhara, Nepal*

Corresponding author: raju.nma.np@gmail.com

Keywords: Climate change, Knowledge index, Tourism, Impact, Nepal

Nepal is experiencing significant environmental impacts from rising temperatures, glacial melt, and increasingly frequent extreme weather events. These changes have adversely affected public health, livelihoods, ecological systems, and the tourism sector. This study used survey data from 490 households in the Annapurna Conservation Area to assess knowledge of climate change impacts on tourism. The findings reveal that climate change awareness varies significantly by geographic location and demographic characteristics and is closely associated with age, education level, and place of residence. Urban residents exhibit notably higher awareness than their rural counterparts, and individuals with higher education demonstrate substantially greater knowledge than those with only basic education. Interestingly, literate individuals also show significantly more awareness than those with basic education. The composite climate change knowledge index yields a mean score of 62.73, indicating a moderate-to-high level of awareness among participants. While the majority possess satisfactory knowledge, approximately 42% of the population remains at low or moderate levels. These results suggest that public understanding is largely derived from experiential observations rather than formal scientific sources.

Forecasting Nepal's Nominal Gross Domestic Product Using The Box–Jenkins ARIMA Methodology

Udaya Bahadur Bohora¹, Bijay Lal Pradhan¹

¹ *Department of Statistics, Amrit Campus, Tribhuvan University, Lainchaur, Kathmandu, Nepal*

Corresponding author: udaybohara2014@gmail.com

Keywords: ARIMA, Box–Jenkins methodology, GDP forecasting, Nepal, Time series analysis, Nominal GDP

Gross domestic product (GDP) is a key indicator of economic activity and provides an important basis for macroeconomic planning, fiscal management, investment decisions, and public resource allocation. This study models and forecasts Nepal's annual nominal GDP using the Box–Jenkins autoregressive integrated moving average (ARIMA) methodology. Annual nominal GDP data at current prices for the fiscal years 1990/91 to 2024/25, comprising 35 observations and expressed in million Nepalese rupees, were analyzed using R. The GDP series was logarithmically transformed, and stationarity was assessed using graphical analysis, autocorrelation and partial autocorrelation functions, the Augmented Dickey–Fuller (ADF) test, and the Kwiatkowski–Phillips–Schmidt–Shin (KPSS) test. Six pre-specified ARIMA models were estimated using maximum likelihood and compared using AIC, AICc, BIC, log-likelihood, RMSE, MAD, and residual Ljung–Box diagnostics. The results indicated that the GDP series was non-stationary in its original and logarithmic forms, while first differencing of the log-transformed series produced mixed stationarity evidence, with the KPSS test supporting stationarity. Among the pre-specified candidate models, ARIMA(1,1,2) achieved the lowest AIC and AICc and showed no significant residual autocorrelation. However, its autoregressive coefficient was estimated at the boundary of the parameter space, indicating a potential near-unit-root estimation issue. The automated model-selection procedure identified ARIMA(0,1,0) with drift as a more parsimonious specification with lower information criteria. Forecasts from ARIMA(1,1,2) indicate that Nepal's nominal GDP is expected to increase from approximately NPR 6.353 trillion in 2025/26 to NPR 7.908 trillion in 2029/30, although prediction intervals widen substantially with the forecast horizon. The findings demonstrate the usefulness of ARIMA as a transparent benchmark for Nepal's nominal GDP forecasting while highlighting the importance of model comparison, parsimony, and explicit treatment of forecast uncertainty. Future research should incorporate out-of-sample validation and compare univariate ARIMA with multivariate, machine-learning, and hybrid forecasting approaches.

Awareness Regarding Autism Among Parents Attending A Teaching Hospital In Lalitpur, Nepal: A Cross-Sectional Study

Mitra Rai¹, Sandhya Budhathoki¹

¹ Patan Academy of Health Sciences, School of Nursing and Midwifery, Lalitpur Nursing Campus, Lalitpur, Nepal

Corresponding author: 619bsc_mitra@pahs.edu.np

Keywords: Autism spectrum disorder, Awareness, Parents, Teaching hospital

Autism Spectrum Disorder (ASD) is a neurodevelopmental condition affecting social communication, interaction, and behavior, which is increasing worldwide. Awareness among parents is crucial as early detection and timely intervention can significantly improve developmental outcomes. Unfortunately, there are limited studies on parental awareness of ASD among hospital-based populations in Nepal. This study aimed to assess awareness regarding autism among parents attending a teaching hospital in Lalitpur and to examine its association with sociodemographic characteristics. A cross-sectional study was conducted among 98 parents attending the teaching hospital in Lalitpur, selected through non-probability convenience sampling. Data were collected using a self-developed structured questionnaire assessing awareness regarding autism, including signs and symptoms, risk factors, and management. Each correct response was assigned one point, and awareness scores were calculated as the sum of correct responses. Descriptive statistics and appropriate inferential statistical tests were used to analyze the data. Statistical significance was considered at $p < .05$. Among the 98 parents, 4 (4.1%) reported a family history of autism. The mean overall autism awareness score was 14.90 ± 4.42 . The mean scores for awareness regarding signs and symptoms, risk factors, and management were 6.77 ± 2.78 , 3.42 ± 1.67 , and 4.04 ± 1.15 , respectively. Overall awareness scores were approximately normally distributed (Kolmogorov-Smirnov $Z = 1.28$, $p = 0.060$). There was no statistically significant difference in overall awareness scores according to sex of parents ($p = .616$) or family history of autism ($p = .462$), and age was not significantly correlated with overall awareness score ($r = .164$, $p = .107$). Similarly, no statistically significant difference was observed according to occupation, $F(6, 91) = 1.83$, $p = .102$. However, overall awareness differed significantly according to educational level, $F(3, 94) = 8.02$, $p < .001$. The study found variation in autism awareness among parents, with educational level significantly associated with overall awareness. Strengthening autism-related awareness among parents, particularly those with lower educational attainment, may support earlier recognition of signs and symptoms and appropriate management.

Computational Analysis of the Effects of Stenosis Height and Width on Two-Layered Blood Flow Through an Artery With Bell-Shaped Stenosis

Kedar Nath Chhatkuli¹, Chudamani Pokharel², Jeevan Kafle³

¹ *Department of Mathematics, Amrit Campus, Tribhuvan University, Lainchaur, Kathmandu, Nepal*

² *Bhaktapur Multiple Campus, Tribhuvan University, Bhaktapur, Nepal*

³ *Central Department of Mathematics, Tribhuvan University, Kirtipur, Kathmandu, Nepal*

Corresponding author: kedar.chhatkuli@ac.tu.edu.np

Keywords: Bell-shaped stenosis, stenosis height, stenosis width, computational analysis, Two-layered blood flow, Wall shear stress, Pressure drop, Volumetric flow rate

This study presents a computational investigation of two-layered blood flow through an artery with bell-shaped stenosis, with particular emphasis on the effects of stenosis height and stenosis width on key hemodynamic characteristics. The arterial lumen is modeled as a two-layer system consisting of a peripheral plasma layer and a central core region, and the governing Navier–Stokes equations are formulated in cylindrical polar coordinates under the assumptions of incompressible, Newtonian, axisymmetric, and fully developed flow. Analytical expressions are obtained for the velocity distribution, volumetric flow rate, wall shear stress, pressure gradient, and pressure drop in the stenotic region.

A systematic computational parametric analysis is then performed by varying the stenosis height and width independently and in combination to quantify their influence on blood-flow behavior. Numerical integration is employed to evaluate the pressure drop ratio and shear-stress characteristics in both the core and peripheral layers. The computational results demonstrate how increasing stenosis height intensifies the restriction of the flow passage, producing significant changes in velocity distribution, wall shear stress, volumetric flow rate, and pressure loss. The stenosis width is also found to play an important role by controlling the axial extent over which these hemodynamic changes occur. The combined influence of stenosis height and width provides a more comprehensive description of the severity and spatial characteristics of stenotic flow than consideration of either geometric parameter alone.

The study provides a quantitative computational framework for assessing the hemodynamic consequences of different stenosis geometries and contributes to the mathematical modeling of blood flow in stenosed arteries. The findings may be useful for understanding the relationship between stenosis geometry and clinically relevant flow parameters in cardiovascular biomechanics.

Performance Evaluation of Machine Learning Classification Algorithms for Infectious Disease Prediction Using Inpatient Records From Nepalese Hospitals

Sarad Chandra Kafle¹, Mohit Nain², Ekta Hooda³, Bhagawoti Sharma⁴

¹ *Department of Statistics, Birendra Multiple Campus, Tribhuvan University, Chitwan, Nepal*

² *Department of Statistics, Om Sterling Global University, Hisar, India*

³ *ICAR-Central Institute for Research on Buffaloes, Hisar, India*

⁴ *Department of Health Education, Mahendra Multiple Campus, Tribhuvan University, Banke, Nepal*

Corresponding author: sarad.kafle49@gmail.com

Keywords: Dengue, Disease prediction, Kala-azar, Scrub typhus, Supervised learning

Accurate forecasting of infectious diseases is crucial to better clinical decision-making and lower disease burden in resource-poor healthcare environments. In this study, various machine learning (ML) classification algorithms were used to predict three diseases: dengue, scrub typhus and kala-azar from inpatient records of seven hundred nine from three different hospitals in Nepal. Routine laboratory parameters and demographic parameters were chosen as predictor variables, and having a disease as a dependent variable. In Python, five supervised ML algorithms: Random Forest (RF), Logistic Regression (LR), Artificial Neural Network (ANN), Support Vector Machine (SVM), and Decision Tree (DT) were developed, with the data being split into an 80:20 train-test ratio, and randomization is done for splitting data. The accuracy, precision, recall, F1-score, and area under the receiver (AUC) were used to assess model performance.

ANN achieved the best predictive performance among the dengue cases with an accuracy of 73.9% and an F1-score of 0.82. For the scrub typhus, ANN had the highest accuracy value of 76.8% and F1 score (0.63) while SVM had the highest AUC value of 0.80. For the prediction of kala-azar, ANN exhibited the highest discriminative ability with an AUC of 0.95 and satisfactory accuracy (96.5%) while RF displayed the highest overall accuracy (97.2%). In general, ANN performed best in both regards, being the most balanced and reliable classifier for the three infectious diseases. The findings underscore the possibility of using ML-based clinical decision support systems in the early prediction of infectious diseases in hospitals in Nepal, and how normal laboratory and demographic information could be combined with the potential of routine information in predictive healthcare analytics.

Distributional Pattern of Labor Productivity in Manufacturing Industries of Nepal

Eak Raj Kadariya^{1,2}, Ram Prasad Khatiwada²

¹ *Department of Statistics, Tri-Chandra Multiple Campus, Ghantaghar, Kathmandu, Nepal*

² *Central Department of Statistics, Kirtipur, Kathmandu, Nepal*

Corresponding author: kadariya101@gmail.com

Keywords: Labor productivity, Distributional pattern, GB2 distribution, Nepal, Manufacturing industries

The distributional properties of labor productivity are frequently assumed to follow a lognormal form, consistent with Gibrat's law of proportionate industry growth. However, this assumption is seldom empirically verified before its application in regression-based productivity research. This study systematically evaluates alternative distributional specifications to identify the model that best represents industry-level labor productivity in Nepal's manufacturing industries. Establishing the correct distributional form is a critical prerequisite for robust inference regarding productivity determinants.

Study data from 480 manufacturing industries were analyzed, with five candidate distributions lognormal, gamma, log-logistic, log-Student's t , and the four-parameter Generalized Beta of the Second Kind (GB2) estimated using maximum likelihood methods. Model adequacy was evaluated using the Akaike and Bayesian Information Criteria, supplemented by graphical diagnostics such as empirical-versus-fitted density overlays and quantile-quantile plots. The observed productivity data demonstrated substantial skewness (9.50) and excess kurtosis (114.39). Comparative analysis revealed that the GB2 distribution provided the best fit (log-likelihood = $-7,043.98$; AIC = $14,095.95$; BIC = $14,112.65$), followed by the log-Student's t ($\hat{\nu} \approx 2.87$; AIC = $14,160.19$) and log-logistic (AIC = $14,166.18$) distributions. All three substantially outperformed the conventional lognormal specification (AIC = $14,195.66$), whereas the gamma distribution exhibited the poorest fit (AIC = $14,471.59$), failing to capture even the central mode.

The findings demonstrate that labor productivity in the Nepali manufacturing industry exhibits genuinely heavy-tailed behavior rather than simple right skewness. This challenges the prevailing reliance on lognormal assumptions and underscores the necessity of adopting more flexible likelihood specifications in subsequent econometric modeling, particularly within Bayesian frameworks for productivity analysis.

Parameter-Efficient Domain Adaptation and Preference Alignment of an Open Large Language Model for Nepal’s Electricity-Sector Regulatory Corpus

Bhagat Pandey¹, Aakash Bhusal¹

¹ *MTech in Artificial Intelligence, Kathmandu University, Nepal*

Corresponding author: pandeybhagat369@gmail.com

Keywords: Large language models, Low-resource languages, Nepali NLP, Domain adaptation, LoRA, Direct preference optimization, Optical character recognition, Regulatory text

Large language models underperform on low-resource, domain-specific text such as Nepal’s electricity-sector legal and regulatory documents, which are bilingual and distributed as image-only PDFs with no machine-readable text layer. We present NEA-BOT, an end-to-end pipeline that adapts an open 4.7-billion-parameter model (Gemma 4 E2B, reimplemented from scratch in PyTorch) to this domain under academic compute constraints.

We apply optical character recognition to 107 Nepal Electricity Authority and statutory PDFs using a Nepali-tuned Tesseract model, then construct a cleaned bilingual corpus of 4,845 passages totalling 3.70 million tokens (approximately 40% Devanagari and 60% English), from which we synthesise 9,632 grounded instruction pairs and 9,615 preference pairs. Three sequential parameter-efficient stages—continued pretraining (CPT), supervised instruction fine-tuning (SFT), and Direct Preference Optimization (DPO)—each train only 25.3 million low-rank adaptation (LoRA) parameters, representing 0.54% of the model, on a single commodity GPU in roughly 70 minutes in total.

On deterministic held-out evaluation, CPT substantially improves domain modeling, reducing perplexity from 9,194.8 to 7.8. SFT produces the largest gains in answer quality, increasing token-F1 from 0.139 to 0.546 and ROUGE-L from 0.119 to 0.525. DPO substantially improves preference alignment, increasing preference accuracy from 0.095 to 0.850. However, this alignment improvement is accompanied by a decline in language-modeling and answer-generation performance, with perplexity increasing to 24.4 and token-F1 decreasing to 0.233. These results reveal a measurable alignment tax and demonstrate the importance of stage-wise evaluation rather than relying on a single performance metric.

The work demonstrates that credible domain adaptation and preference alignment for low-resource, bilingual regulatory text can be achieved on commodity hardware. It contributes a reproducible training pipeline and stage-wise evaluation framework for public-sector and regulatory natural language processing in Nepal.

A Multilevel Mixed-Effects Analysis of Barriers to Healthcare Access among Women of Reproductive Age in Nepal

Krishna Ram Lamichhane¹

¹ *Department of Community Medicine, Kathmandu Medical College, Sinamangal, Kathmandu, Nepal*

Corresponding author: krish.lamichhane965@gmail.com

Keywords: Healthcare access, Nepal, Women of reproductive age

Globally, equitable access to essential healthcare remains an important public health priority. The World Health Organization estimates that 4.6 billion people were not fully covered by essential health services in 2023. Equitable access to healthcare is particularly important for improving women's health, yet many women in Nepal continue to face difficulties when seeking care. These difficulties may be related to individual characteristics as well as the socioeconomic and geographic conditions in which women live. Understanding these differences is important for identifying inequalities in healthcare access. This study aimed to identify characteristics associated with barriers to healthcare access among women of reproductive age in Nepal using a multilevel mixed-effects approach. Data from the 2022 Nepal Demographic and Health Survey (NDHS) were used. The analysis was based on a weighted sample of 14,845 women of reproductive age. The outcome was the presence of at least one barrier to healthcare access, based on reported difficulties related to obtaining permission, money, distance to a health facility, or not wanting to go alone. Multilevel mixed-effects logistic regression was used to examine factors associated with healthcare access barriers while accounting for clustering. A null model, an individual-level model, a geographic model, and a full model were fitted. Adjusted odds ratios (AORs) with 95% confidence intervals (CIs) were reported. Overall, 66.3% (95% CI: 64.5–68.1%) of women reported at least one healthcare access barrier. In the full model, age, marital status, education, health insurance, household wealth, residence, and province were associated with reporting a barrier. Compared with adolescents aged 15–19 years, women aged 20–24, 25–29, and 30–34 years had progressively lower odds of reporting barriers (AOR = 0.83, 0.63, and 0.59, respectively). Previously married women had higher odds than currently married women (AOR = 1.51). Higher education, health insurance, and greater household wealth were associated with lower odds, while rural residence was associated with higher odds (AOR = 1.17). Differences were also observed across provinces. Community-level variation was substantial, with the ICC decreasing from 21.2% in the null model to 12.0% in the full model; the full model explained 49.2% of between-community variation (LR $\chi^2 = 875.18$, $p < 0.001$). Barriers to healthcare access were common among women of reproductive age in Nepal, with around two in three women reporting at least one barrier. Education, health insurance coverage, household wealth, residence, and province were associated with healthcare access barriers. The remaining differences between clusters indicate that healthcare access is influenced by both individual characteristics and the broader context in which women live. Strengthening financial protection and improving access for disadvantaged and rural women may help reduce inequalities in healthcare access in Nepal.

A Hybrid CNN–Random Forest Approach for Plant Disease Detection

Anjal Ghimire¹, Ashmita Timalsina¹

¹ *School of Mathematical Sciences, Institute of Science and Technology, Tribhuvan University, Kirtipur, Nepal*

Corresponding author: anjalghimire890@gmail.com

Keywords: Plant disease detection, CNN, Random forest, Image classification, Precision agriculture

Plant diseases can significantly reduce crop quality and production when they are not identified at an early stage. This study presents a web-based Plant Disease Detection System (PDDS) that identifies plant diseases from leaf images and provides users with information about their causes, prevention, and treatment. The proposed system follows a hybrid learning approach in which a convolutional neural network (CNN) extracts visual features, such as color, texture, shape, and disease patterns, while a random forest classifier assigns the extracted feature vector to a particular disease class. The model was developed using 29,245 RGB leaf images, each with a dimension of 256×256 pixels. The dataset consists of 22 healthy and diseased classes associated with apple, grape, corn, and tomato plants. Exploratory data analysis showed a considerable difference in the number of images available for each class, indicating class imbalance within the dataset. The model was evaluated using accuracy, precision, recall, F1-score, and a confusion matrix, as well as ROC analysis. Accuracy was calculated as $A = (TP + TN) / (TP + TN + FP + FN)$, whereas the relationship between precision (P) and recall (R) was measured using $F_1 = 2PR / (P + R)$. The trained model achieved approximately 98% validation accuracy, while precision, recall, and F1-score each reached 97.78%. The findings indicate that CNN-based feature extraction combined with random forest classification can effectively distinguish most plant disease patterns. However, diseases with visually similar or overlapping symptoms remain comparatively difficult to classify. The prediction model was integrated into a Django-based web application, while MongoDB Atlas was used to manage user, plant, and disease-related information. Functional, system, responsiveness, and usability tests confirmed that the main system modules performed as expected. The developed system offers an accessible method for preliminary plant disease screening, although its reliability is influenced by leaf-image quality, background conditions, and the range of crops represented in the training dataset.

Statistical Analysis of Knowledge and Practice of Sexual and Reproductive Health Rights Among Married Women of Reproductive Age at Lamahi Municipality, Dang, Nepal

Deepjyoti Khanal¹

¹ *Tribhuvan University, Nepal*

Corresponding author: itsdeepjyotikhanal@gmail.com

Keywords: SRHR, Logistic regression, MWRA, Underage marriage, Omnibus test, Hosmer–Lemeshow, ROC-AUC, Nepal

Sexual and Reproductive Health Rights (SRHR) encompass bodily autonomy, safe sexual lives, and free reproductive choices, including decisions on if, when, and how often to reproduce. Despite constitutional protections in Nepal, awareness and utilization remain low among married women of reproductive age (MWRA). This study assessed the levels of SRHR knowledge and practice among MWRA residing in Lamahi Municipality, Dang, and identified associated socio-demographic and economic factors. A cross-sectional study was conducted among 403 married women selected through a two-stage stratified random sampling technique. Data were collected through structured face-to-face interviews and analyzed using R software version 4.3.3. Descriptive statistics were used for univariate analysis, while Chi-square and Fisher's exact tests were applied for bivariate analysis. Variables significant at the bivariate analysis were entered into multivariable binary logistic regression models to identify independent predictors of SRHR knowledge and practice. Model adequacy was assessed using the Omnibus test, Hosmer–Lemeshow test, classification accuracy, and ROC-AUC analysis. The study revealed that 45.7% of respondents had adequate knowledge and 42.9% demonstrated good practice of SRHR. More than half (55.10%) of the respondents were married before the legal age of 20 years. Multivariable logistic regression analysis showed that respondents with secondary or higher education had significantly higher odds of adequate SRHR knowledge (AOR = 5.068, 95% CI: 2.657–9.665, $p < 0.001$) and good SRHR practice (AOR = 2.813, 95% CI: 1.552–5.098, $p = 0.001$). Husband's education was also significantly associated with both knowledge (AOR = 2.146, $p = 0.013$) and practice (AOR = 3.047, $p < 0.001$). High family income significantly increased the likelihood of adequate knowledge and good practice, while women aged 35–49 years had lower odds of good practice (AOR = 0.284, $p = 0.006$). Marriage at or after 20 years significantly improved SRHR knowledge (AOR = 1.894, $p = 0.031$). The models demonstrated good fit and predictive performance, with ROC-AUC values of 0.885 for knowledge and 0.846 for practice.

Knowledge and practice regarding SRHR among MWRA were found to be inadequate and poor, strongly influenced by educational attainment, economic status, and age at marriage identified in the study. Strengthening women's education, promoting economic empowerment, delaying early marriage, and increasing male involvement are essential to improving SRHR outcomes in the study area.

Unveiling Nepal's Data Revolution: The Role of Statistical Decision-Making in Advancing the Sustainable Development Goals

Binaya Rijal¹

¹ *Independent Researcher, Kathmandu, Nepal*

Corresponding author: binayarijal573@gmail.com

Keywords: Data revolution, Statistical intelligence, Evidence-based decision-making, Sustainable development goals, SDG monitoring, Nepal, Data governance

The rapid expansion of data systems is reshaping how societies understand development and make public decisions. For Nepal, where evidence-based governance is increasingly essential for achieving the Sustainable Development Goals (SDGs), transforming growing volumes of data into reliable statistical intelligence remains a critical challenge. Nepal's 2024 SDG review reported data availability for 79.1% of 301 indicators, while highlighting continuing gaps in data coverage and disaggregation (United Nations, 2024). This study examines the data-to-decision nexus by exploring how statistical evidence can strengthen SDG planning, monitoring, and policy decisions in Nepal. Using a mixed-method design, the study integrates SDG indicators, national statistical datasets, and policy evidence through descriptive statistics, correlation, regression modelling, trend analysis, and robustness diagnostics. Results are expected to show that stronger statistical capacity, data quality, accessibility, and evidence-based decision-making improve SDG monitoring and policy responsiveness. The study concludes that Nepal's data revolution can advance sustainable development only when credible data are transformed into actionable decisions.

Neuromorphic Computing and Spiking Neural Networks: A Brain-Inspired Pathway Toward Artificial General Intelligence

Madhu Ajit Pandey¹

Corresponding author: pandeyajit233@gmail.com

Keywords: Neuromorphic computing, Spiking neural networks, Spike-timing-dependent plasticity, Artificial general intelligence, Von Neumann bottleneck, In-memory computing, Surrogate gradient learning, Neuromorphic hardware

Contemporary deep learning systems achieve strong performance on narrow benchmarks but remain constrained by the von Neumann architecture, which separates memory and processing and relies heavily on dense floating-point operations and global backpropagation. This study examines neuromorphic computing and spiking neural networks (SNNs) as a potentially more energy-efficient computational substrate for artificial general intelligence (AGI), focusing on event-driven spike representations, in-memory computing, and biologically grounded local learning rules. The research will combine simulation and hardware validation using spiking architectures such as leaky integrate-and-fire and adaptive neuron models implemented with open-source frameworks, including `snnTorch` and Intel's Lava. Surrogate-gradient training will be compared with spike-timing-dependent plasticity (STDP) and related local learning approaches using event-based and static benchmark datasets. Trained networks will subsequently be evaluated on neuromorphic platforms, including Intel's Loihi 2 and BrainChip's Akida, with emphasis on energy consumption, inference latency, and on-chip learning performance relative to GPU-based approaches. The study is expected to characterize the trade-off between biological plausibility and task accuracy, identify key algorithmic and hardware barriers to scalable SNNs, and propose a candidate local learning rule for improving their performance on complex reasoning tasks. The findings aim to contribute to the development of energy-efficient and continually learning systems for edge robotics, autonomous sensing, and always-on biomedical applications, while positioning neuromorphic computing within the broader landscape of AGI research.

A Comparison of Open-source and Proprietary Analytics in Innovative Statistical Applications, Spanning Statistical Methods and Software to Intelligent Data Analysis

Nabaraj Poudel¹

Nepal Agricultural Research Council, Kathmandu, nepal

Corresponding author: npoudel43@yahoo.com

Keywords: Open-source analytics, Proprietary analytics, Statistical software, Intelligent data analysis, Statistical computing, Machine learning, Reproducibility, Data science

The rapid evolution of statistical computing has expanded the range of tools available for statistical analysis, data visualization, predictive modelling, and intelligent data-driven decision-making. Open-source platforms such as R and Python provide flexible, transparent, and extensible environments, whereas proprietary software such as SAS, SPSS, and Stata offers integrated workflows, standardized procedures, and extensive technical support. This study presents a comparative assessment of open-source and proprietary analytics environments across innovative statistical applications, covering statistical methods, software capabilities, computational efficiency, reproducibility, visualization, machine learning, and intelligent data analysis. The comparison considers their strengths and limitations in handling conventional statistical procedures as well as emerging applications involving large and complex datasets. Particular attention is given to accessibility, scalability, interoperability, automation, user-friendliness, and the availability of advanced analytical methods. The study also examines how software choice influences reproducibility, collaboration, and the practical implementation of modern statistical techniques. The findings are expected to show that neither approach is universally superior; rather, their relative advantages depend on the analytical task, user expertise, computational requirements, institutional resources, and desired level of customization. Open-source analytics offer substantial advantages in flexibility, transparency, and extensibility, while proprietary platforms remain valuable for standardized workflows, enterprise-level applications, and structured technical support. The study highlights the importance of selecting analytical tools based on methodological requirements rather than software preference and provides practical guidance for researchers, statisticians, educators, and organizations adopting modern statistical and intelligent data-analysis approaches.

Beyond Distance-Decay: A Graph Attention Network for Interpretable District-Interaction Analysis in Nepal's Sub-National Education System

Anmol Adhikari¹

¹ *Noida International University, India*

Corresponding author: anmoladhikari03@gmail.com

Keywords: Graph attention networks, Spatial interdependence, Education equity, Sub-National policy analysis, Interpretable machine learning, Nepal

Sub-national education research in Nepal has traditionally treated districts as independent units or modeled spatial interdependence using fixed-weight approaches that primarily rely on geographic proximity. This study investigates whether a multi-relational Graph Attention Network (GAT) can learn informative inter-district relationships for district-level literacy analysis. To our knowledge, this is the first study to apply a Graph Neural Network to district-level education policy analysis in Nepal, representing spatial, socioeconomic, and institutional relationships among the country's 77 districts within a unified graph framework. District literacy data are obtained from Table 23 of the 2021 National Population and Housing Census (NPHC), while ten socioeconomic and institutional covariates are calibrated estimates derived from province-level NLSS and CEHRD baselines because corresponding district-level administrative data are not publicly accessible. This mixed data provenance is explicitly acknowledged. A multi-relational graph comprising 3,750 edges across three interaction channels is used to train a three-head GAT with L2 regularization and early stopping. Predictive reliability is assessed using random five-fold cross-validation and leave-one-province-out (LOPO) validation. The GAT does not outperform linear baselines: five-fold cross-validation yields RMSE values of 8.24 for GAT, 7.13 for Ridge, and 6.99 for Lasso, with R^2 values of 0.63, 0.19, and 0.14, respectively; LOPO validation yields an R^2 of 10.89 for the GAT. These results indicate substantial limitations in predictive generalization given the small district-level sample and estimated covariates. Accordingly, GAT attention patterns are interpreted as diagnostic and hypothesis-generating rather than causal or policy-prescriptive. The model places greater attention on socioeconomic and institutional similarity than geographic adjacency, identifying relational patterns for further investigation. The study highlights the potential and limitations of graph-based education analysis and underscores the need for real district-level administrative data, larger samples, longitudinal observations, and geographically held-out validation before such models can provide reliable evidence for sub-national education policy.

Statistics in the Context of Modern Data Science and AI: A Case Study in Explainable Policy Analytics

Sumedha Sedhain¹

¹ *The British College*

Corresponding author: sedhainsumedha@gmail.com

Keywords: Statistics, Data Science, Artificial Intelligence, Explainable AI, Model Validation, Policy Analytics

As data science and artificial intelligence continue to reshape research and decision-making, classical statistical methods remain essential for ensuring that data-driven conclusions are valid, interpretable, and trustworthy. This work explores how core statistical techniques—hypothesis testing, model comparison, and structure estimation—can be integrated with modern machine learning and explainable AI to support real-world decision-making. Using district-level educational data as a case study, we combine a data-driven structure-learning method with SHAP-based feature attribution and statistical model comparison (BIC, bootstrap resampling) to evaluate which factors most influence outcomes and how confidently those relationships can be trusted. The results highlight a broader lesson for applied statistics in the AI era: data-driven and theory-driven approaches do not always agree, and rigorous statistical validation remains critical when machine learning is used for policy and decision support. This case study illustrates how statistics and data science, working together, can produce more transparent and reliable insights than either approach alone—a theme central to the emerging applications of statistics in modern research.

Empirical Evaluation of Sorting Algorithm Performance Under Heterogeneous Processor Architectures: A Statistical Comparison

Ayush Singh¹, Saksham Pant¹, Arnav Shrestha¹, Laxmi Bhattarai¹

Corresponding author: singh619ayush@gmail.com

Keywords: paired t -test, Wilcoxon signed-rank test, effect size, Cohen's d , p -value, null hypothesis, bubble sort, merge sort, quicksort

This study compares the runtime efficiency of three sorting algorithms - bubble sort, merge sort, and quicksort - across two different processors (Apple M3, Intel Core Ultra 7). Each algorithm was tested on identical arrays of different sizes arranged in three input orders (ascending, descending, and random), yielding paired timing measurements for direct comparison between processors. A paired t -test was used as the primary statistical method, since each pair of measurements originated from the same array run on both processors rather than from independent samples. To validate these results while accounting for outliers, the Wilcoxon signed-rank test was also applied; agreement between the two tests strengthens confidence in the findings. Finally, effect size (Cohen's d) was calculated to determine the magnitude of the observed performance differences and whether they are practically meaningful.

Comparative Spectral Analysis of Network Robustness Under Node and Edge Failures

Saksham Pant¹, Ayush Singh¹, Arnav Shrestha¹, Laxmi Bhattarai¹

Corresponding author: sakshampant31@gmail.com

Keywords: Spectral graph theory, Network robustness, Algebraic connectivity, Spectral radius, Natural connectivity, Laplacian and adjacency matrix

This study investigates the use of spectral graph properties for characterizing the robustness of complex networks under structural failures. Networks with different topological characteristics will be subjected to random and targeted node and edge removals at varying levels of failure intensity. Algebraic connectivity, spectral radius, and natural connectivity will be evaluated using the eigenvalues of the graph Laplacian and adjacency matrices. Their changes under different failure scenarios will be compared with conventional network robustness measures, including the size of the largest connected component, average path length, and global efficiency. Statistical analysis will be employed to examine the relationship between spectral degradation and structural network damage across different network topologies and failure mechanisms. The study aims to identify spectral measures that provide consistent characterization of network degradation and to assess their effectiveness under different types and intensities of failures. The findings are expected to provide a computational framework for evaluating network robustness through spectral properties and may provide a foundation for identifying structurally critical nodes and edges.

Comparative Performance of Value-at-Risk and Expected Shortfall Under Heavy-Tailed and Volatile Market Conditions: A Statistical Backtesting Approach

Arnav Shrestha¹, Ayush Singh¹, Saksham Pant¹, Laxmi Bhattarai¹

Corresponding author: arnavsth111@gmail.com

Keywords: Expected shortfall (ES), Value-at-Risk (VaR), Market risk, Heavy-Tailed distributions, NEPSE Index

This study aims to compare the performance of Value-at-Risk (VaR) and Expected Shortfall (ES) in measuring market risk in the Nepalese stock market under heavy-tailed and volatile market conditions. Daily price data from the NEPSE Index will be used to calculate returns and examine their statistical characteristics, including volatility, skewness, and kurtosis. Historical, Normal distribution, and Student's t-distribution based methods will be used to estimate VaR and ES at 95% and 99% confidence levels. The models will then be evaluated using rolling-window backtesting by comparing predicted losses with actual market losses. The study will also examine whether model performance changes during periods of high volatility and extreme market movements. The findings are expected to show which risk measurement approach provides more reliable estimates of extreme losses and whether Expected Shortfall provides additional information about tail risk compared with VaR in the Nepalese stock market.

Structural Uncertainty in Constructed Graphs: A Message-Passing Scheme for Incomplete Data

Aaditya Sapkota¹, Harish Chandra Bhandari¹

¹ *Department of Mathematics, School of Science, Kathmandu University, Dhulikhel, Nepal*

Corresponding author: sayhi.aaditya@gmail.com

Keywords: Graph neural networks, Structural uncertainty, Graph construction, Missing data, Neutrosophic representation

Graph neural networks (GNNs) are increasingly employed for incomplete tabular data without an inherent graph, requiring a graph to be constructed from feature similarity and used as a fixed input. In this regard, neutrosophic graph reconstruction is utilized to represent the uncertainty introduced during construction. Different similarity definitions may select different edges from the same data, a rule may change its edge selections after small feature perturbations, and some record pairs may have too few originally observed features for reliable comparison. Existing pipelines often ignore these sources or aggregate them into a single indeterminacy value. Using four density-matched construction rules and repeated feature subsampling, each candidate edge is described by three measured quantities: support across rules; a signed measure of whether disagreement between rules or instability within a rule dominates; and an observability measure of the information available before imputation. These quantities are measured from the data rather than assigned manually. During message passing, support determines how much information is transmitted through an edge, while the source of uncertainty determines how that information is transformed. The neutrosophic mapping evaluated here combines disagreement, instability, and limited observability into a single indeterminacy value, whereas the source-conditioned form preserves their distinctions. Four groups will be compared under increasing

levels of missing data: non-graph methods, conventional GNNs on constructed graphs, an aggregated- neutrosophic GNN, and the source-conditioned scheme examined here. These comparisons will assess

whether preserving the source of structural uncertainty, rather than collapsing it into a single value, can improve classification reliability as data become increasingly incomplete.

Assessing Human Development through Life Satisfaction: Evidence from Bagmati Province of Nepal

Shanta Gautam¹, Ishwari Banjade²

¹ *PhD Scholar, Nepal*

² *Central Department of Statistics, Tribhuvan University, Kirtipur, Kathmandu, Nepal*

Corresponding author: ishwaribanjade19@gmail.com

Keywords: Human development, Life satisfaction, Subjective well-being, Livelihood, Quality of life, Technology adaptation

Life satisfaction represents a subjective assessment of overall quality and conditions of life, while human development reflects the expansion of people's capabilities, opportunities, choices, and freedoms to lead healthy, educated, productive, and meaningful lives. This study examines the relationship between life satisfaction and the level of human development among households in the study areas. Data were collected from 350 respondents and assessed based on perceptions of living conditions, health, education, livelihood opportunities, social relationships, access to services, freedom, decision-making, and overall well-being. Human development was assessed through income, education, social governance, and technological adaptation. Approximately 61% of respondents reported high or moderately high life satisfaction, while 54% were classified as having moderate to high human development. Respondents with better access to healthcare, education, livelihood opportunities, income, technology, and decision-making opportunities generally reported higher life satisfaction. The findings indicate a positive relationship between human development and life satisfaction, suggesting that improved capabilities, living conditions, and access to essential services are generally associated with greater life satisfaction. However, life satisfaction may vary according to individual expectations, social relationships, aspirations, and personal circumstances. The study concludes that human development should be assessed not only through objective socioeconomic conditions but also through people's subjective experiences of well-being. Life satisfaction provides an important complementary dimension for understanding the outcomes of human development. Integrating human development indicators with life satisfaction can provide a broader understanding of people's living conditions and well-being and support policies aimed at improving livelihoods, social inclusion, quality services, governance, technology access, and meaningful opportunities for a better quality of life in Nepal.

Association Between Physical Activity, Menstrual Cycle Characteristics and Body Weight in Adolescent Girls in Western Nepal

Keshav Raj Bhandari¹

¹ *Department of Public Health, Madan Bhandari Academy of Health Sciences, Hetauda, Nepal*

Corresponding author: <mailto:keshav.bhandari@mbahs.edu.np>

Keywords: Adolescent girls, Body mass index (BMI), Lifestyle factors, Menstrual irregularity, Physical activity

Adolescent girls frequently experience menstrual irregularities that are affected by multiple factors, including body mass index (BMI), exercise habits, nutrition, and sleep routines. This study sought to investigate the relationships among BMI, menstrual cycle disruptions, and lifestyle elements such as exercise, eating habits, and sleep patterns in a group of teenage girls between 13 and 16 years of age. This cross-sectional study included 301 teenagers. Data were collected on body mass index, menstrual health, exercise habits, eating patterns, and sleep duration. Statistical analyses, including chi-square tests and logistic regression models, were used to examine the relationships between these variables and menstrual irregularities. Participants had a mean age of 14.65 ± 0.86 years. Significant correlations were identified between BMI and factors such as ethnicity, tea intake, and exercise level ($p \leq 0.05$). Although no direct link was established between BMI and menstrual irregularity ($p = 0.454$), certain lifestyle choices were strongly associated with irregular menstruation. These included insufficient physical activity (OR = 2.94, $p = 0.042$), regular dining out more than three times weekly (OR = 9.08, $p = 0.045$), and inadequate rest ($p = 0.035$). Additionally, dysmenorrhea was significantly associated with menstrual irregularity ($p = 0.022$), suggesting a possible shared hormonal mechanism underlying both conditions. Although body mass index (BMI) did not show a direct correlation with menstrual irregularities, various lifestyle elements such as exercise habits, nutritional intake, and hours of sleep were found to be key factors influencing menstrual health. This underscores the crucial role of maintaining a wholesome lifestyle, encompassing regular physical activity, a well-balanced diet, and adequate rest in promoting normal menstrual cycles among teenage girls. Additional long-term research is required to investigate cause-and-effect relationships between these lifestyle factors and disruptions in menstrual patterns.

Additive Lomax Distribution: Mathematical Properties, Statistical Inference and Applications in Real Data

Kiran Bhattarai¹, Govinda Prasad Dhungana¹, Nisha Lamichhane¹

¹ *Birendra Multiple Campus, Tribhuvan University, Chitwan, Nepal*

Corresponding author: kiran.bhattarai2025@gmail.com

Keywords: Additive Lomax Distribution; Bathtub Hazard Rate; Information Criteria; Maximum Likelihood Estimation; Probability Density Function

Probability distributions are used to measure uncertainty and model complex empirical data across engineering and scientific disciplines. However, classical distributions often fail to capture complex empirical features, such as extreme right-skewness, heavy tails, and non-monotonic failure rates. Hence, to resolve these limitations, this study derives the Additive Lomax distribution, a flexible four-parameter continuous probability model. The PDF and CDF of the Additive Lomax distribution were derived using an additive independent hazard rate function. The study established its statistical properties, including the quantile function, mode, moments, moment generating function, incomplete moments, Shannon entropy, and order statistics. To examine the model's behavior, a simulation of 500 samples was conducted using the `uniroot` function in R. Parameter estimation was performed via MLE in R. The model was validated using a real-world dataset with the Kolmogorov-Smirnov, Anderson-Darling, and Cramér-von Mises statistical tests, along with P-P and Q-Q plots.

The Additive Lomax distribution proved to be naturally highly right-skewed and heavy-tailed, with its skewness and kurtosis adapting flexibly based on its parameters. Simulation findings revealed that Shannon entropy values remained remarkably consistent across parameter variations, demonstrating that the model reliably measures the consistency of randomness within empirical systems. Finally, the empirical performance of the Additive Lomax distribution was compared with three prominent models in the literature: the Additive Weibull, Additive Chen, and Flexible Additive Chen-Gompertz distributions. Comparative modeling evaluations established the Additive Lomax model's absolute superiority over competing models.

Hence, the four-parameter Additive Lomax distribution is a mathematically robust and empirically superior model for complex lifetime and reliability data. Its capacity to capture non-monotonic bathtub hazard rates and positive right-tail behavior has significant implications for reliability engineering, quality control, and risk management, providing practitioners with a highly precise tool.

Statistical and Data-Driven Modeling for Real-Time Public Bus Management in Kathmandu Valley

Rabin Rachalica¹

¹ *Bhaktapur Tours Research Centre, Bhaktapur, Nepal*

Corresponding author: rachalica@hotmail.com

Keywords: Public transportation, Real-time bus management, Travel-time prediction, Statistical modeling, Data science

Kathmandu Valley's public transportation system faces persistent challenges related to irregular bus schedules, uncertain arrival and departure times, traffic congestion, inefficient route management, and limited availability of reliable real-time transport information. These challenges create difficulties for passengers, transport operators, and policymakers and highlight the need for evidence-based and data-driven public transportation management. This study proposes a statistical and data science framework for developing an integrated real-time public bus management system for Kathmandu Valley, with particular attention to Ring Road and outer-route services. The study explores how real-time arrival and departure observations can be transformed into useful statistical indicators for understanding travel-time variability, service reliability, passenger demand, route performance, and congestion patterns. Descriptive statistics, time-series analysis, regression-based modeling, statistical learning, and machine-learning techniques can be applied to identify patterns and predict bus arrival times. The proposed framework also considers temporal and spatial variations in transport demand and examines how predictive information can support operational decision-making. The research emphasizes the practical application of statistics and data science in an urban environment where transportation data are often fragmented and irregular. By integrating real-time observations with statistical modeling, the proposed system can generate evidence for improving scheduling, route coordination, passenger information, and resource allocation. The study demonstrates how emerging data-driven approaches can contribute to more reliable, efficient, and responsive public transportation systems in rapidly growing cities. The findings and methodological framework are expected to provide a foundation for evidence-based transport planning and demonstrate the broader potential of statistical and data science applications in urban governance and sustainable mobility.

Factors Affecting Quality of Education on Student Satisfaction Between Self-Sustain and Regular Programs at Tribhuvan University

Gopal Prasad Sedhai¹, Murari Karki¹

¹ *Department of Statistics, Saraswati Multiple Campus, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: gopal.sedhai@smc.tu.edu.np

Keywords: Quality of academic atmosphere, Quality of infrastructure, Quality of campus environment, Quality of administrative processes, Student satisfaction

The research explores the impact of educational dimensions related to quality of academic atmosphere, quality of infrastructure, quality of campus environment, and quality of administrative processes on student satisfaction across all academic programs of Tribhuvan University. Moreover, the research assesses the differences between self-sustain and regular programs in terms of satisfaction, offering insights into the comparative performance of institutions in higher education. This study adopted a descriptive, correlational, and explanatory research design. The sample consisted of 385 students of self-sustain and regular programs running under various faculties in Tribhuvan University. The study found that all four independent variables have positive and statistically significant impacts on student satisfaction. Among these variables, quality of academic atmosphere and quality of administrative processes are found to be the strongest predictors. The model predicts 54.1% of the variance in student satisfaction. The results show a significant difference in perception about academic atmosphere between students who belong to self-sustain programs and those who belong to regular programs. This research contributes to overall higher education quality by including academic and administrative dimensions in a common analytical framework. While previous researchers highlighted various aspects of education service quality separately, this research presents comprehensive evidence by combining all institutional dimensions in Nepalese public universities, offering practical implications for policymakers and university administrators to strengthen academia, improve the efficiency of administration, and ensure fair education in all types of programs running under Tribhuvan University.

Rethinking Workplace Well-Being: Transforming Occupational Stress into Sustainable Employee Performance

Gobind Kumar Singh¹

¹ *Saraswati Multiple Campus, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: gobind.singh@smc.tu.edu.np

Keywords: Occupational stress, Employee performance, Workload, Role ambiguity, Supervisory support, Working environment, Work-life balance

This study examines the impact of occupational stress on employees' performance in Nepalese commercial banks, focusing on workload, role ambiguity, supervisory support, working environment, and work-life balance. A quantitative cross-sectional research design grounded in the positivist paradigm was adopted, using descriptive and explanatory approaches. Primary data were collected through a structured five-point Likert-scale questionnaire from employees of five selected commercial banks in Kathmandu Valley. Of the 250 questionnaires distributed using convenience sampling, 246 valid responses were collected, representing a 98.4% response rate. The data were analyzed using SPSS version 25 through descriptive statistics, correlation analysis, and multiple regression analysis. The results indicate that workload, supervisory support, working environment, and work-life balance have significant positive effects on employees' performance, whereas role ambiguity has a significant negative effect. Correlation analysis similarly showed positive relationships between employees' performance and workload, supervisory support, working environment, and work-life balance, while role ambiguity was negatively correlated with performance. Occupational stress significantly influences employees' performance in Nepalese commercial banks. The study provides empirical evidence from the Nepalese banking context by simultaneously examining five important workplace dimensions and offers practical insights for bank management regarding workload, supervisory support, working conditions, role clarity, and work-life balance to enhance employee performance.

Whether or Not Hydropower Development Policy, 2001 Catches Investors' Expectations?

Dhun Bahadur Budhathoki¹

¹ *Nepal Telecom, Kathmandu, Nepal*

Corresponding author: dhun.struggle@gmail.com

Keywords: Term of the license, Storage project, Power mix, Wheeling charges, Force majeure

The objective of this study is to find out whether or not Hydropower Development Policy, 2001 catches investors' expectations. Review of the literature revealed that hydropower developers have been facing a number of problems in terms of survey, construction, distribution, cash subsidy, tree felling, land acquisition, transmission lines, industrial security, market assurance, and so forth. Owing to these reasons, Nepal has failed to accumulate the leverage of its hydropower potential. In this context, this study questions whether or not Hydropower Development Policy, 2001 catches investors' expectations. If not, what sort of weaknesses, lapses, or constraints exist, and what sort of policy should be formulated to invite a large amount of investment? In this context, the study justifies its area of research. In order to achieve the research objectives, this study pursues a mixed research design. Given the nature of the study, it is difficult to determine the population size and unit of analysis. Thus, judgmental sampling techniques have been adopted. To collect data, a set of 33 questionnaires, including 11 quantitative and 22 qualitative questionnaires, was developed and administered to 108 informants from 25 diverse arenas of hydropower. The KoboToolbox online platform was used for data collection. A five-point Likert scale was used to understand the perceptions of informants quantitatively. Deductive reasoning was adopted for quantitative data, while inductive reasoning was used for qualitative data. Quantitative data were analyzed using mean and standard deviation. On the other hand, pragmatism and interpretivism philosophies were used for analyzing qualitative data. Empirically, this study concludes that the Hydropower Development Policy, 2001 meets investors' expectations. Its efficiency and effectiveness nearly catch investors' aspirations. Nonetheless, there is considerable room for addressing the changing expectations of investors.

Nepali Vehicle Number Plate Recognition Using YOLOv11 and CNN

Keshab Raj Phulara¹, Prabin Manee Shrestha¹

¹ *School of Mathematical Sciences, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: krphulara@gmail.com

Keywords: Automatic number plate recognition, YOLOv11, License plate detection, License plate character recognition, Object detection

Automatic Vehicle Number Plate Recognition (ANPR) systems are essential for modern intelligent transportation, traffic monitoring, and law enforcement. However, recognizing Nepali vehicle number plates is challenging due to variations in formats, including the presence of Devanagari characters and embossed plates. This research presents a deep learning-based approach for Nepali vehicle number plate recognition using the YOLOv11 architecture. The proposed system follows a two-stage pipeline. In the first stage, a YOLOv11-based model is used to detect and localize license plates from vehicle images. In the second stage, the detected plates are cropped and passed to another YOLOv11 model for character recognition. The system is capable of recognizing both Devanagari and embossed number plate characters, making it suitable for real-world scenarios in Nepal. The models were trained for 50 epochs on a custom dataset and evaluated using standard performance metrics, including precision, recall, and mean average precision (mAP). The results indicate that the system achieves reliable performance in both detection and recognition tasks, with good accuracy and generalization under varying conditions. This study contributes by developing a system that supports multiple Nepali number plate formats, addressing limitations in existing approaches. The proposed method provides a strong foundation for practical applications such as traffic surveillance, automated parking, and law enforcement systems in Nepal.

Machine Learning Framework for Wellness Prediction using Multidimensional Quality of Life Indicators

Nabin Acharya¹

Corresponding author: nabn.acharya@gmail.com

Keywords: Machine learning, Wellness prediction, Quality of life, Subjective well-being, Feature interpretability, SHAP, Multidimensional indicators, Social policy analytics

Wellness is a multidimensional concept influenced by various interconnected factors, including socioeconomic, psychological, social, environmental, and quality-of-life (QoL) factors. Conventional statistical techniques often do not allow for effective modeling of nonlinear relationships between these determining factors. This paper presents a machine learning framework for predicting individual wellness using multidimensional QoL indicators from a structured household survey of 102 households. The data collected cover 10 QoL areas, including physical health, psychological well-being, social relations, community participation, environmental conditions, economic stability, education and personal development, empowerment and equity, subjective wellness and life satisfaction, as well as sociodemographic and household-level covariates. The framework integrates data preprocessing, feature engineering and feature selection, and compares different supervised learning techniques, including regularized regression, tree-based ensembles such as Random Forest and Gradient Boosting/XGBoost, and support vector machines. Model interpretability is achieved via SHAP-based feature attribution to identify and rank the most influential predictors of subjective well-being. Preliminary findings suggest that ensemble models outperform the benchmarks, with psychological well-being, social support, and economic security emerging as key predictors. The proposed approach provides a scalable, data-driven tool for wellness assessment to support evidence-based social policy and community development, specifically in resource-constrained municipal settings.

Finite Queueing Model with Scheduled and Feedback Maintenance

Ritu Basnet Thapa¹, Sushil Ghimire², Ram Prasad Ghimire²

¹ *Tribhuvan University, Kirtipur, Nepal*

² *Kathmandu University, Dhulikhel, Nepal*

Keywords: Single-server, Threshold number, Finite capacity, Maintenance, feedback

There is always a chance for servers to go for breakdown during the service period. There could be different reasons for service interruptions. This paper deals with two types of service interruptions, namely scheduled maintenance and feedback maintenance, for a queueing model. The server undergoes scheduled maintenance only when the server is idle. Some technical or other issues may affect service quality, and customers may not be satisfied. These dissatisfied customers are subjected to provide negative feedback. If the negative feedback is accumulative to a specified threshold, then the server automatically goes for maintenance. This adaptive approach makes the system flexible and responsive to various feedback situations. The steady-state probabilities of a finite single-server queueing system have been derived to obtain the expected queue length, expected waiting time, and probabilities of having customers in different states using the matrix-analytic method. Numerical results illustrate the effect of the feedback threshold and maintenance rates on queue length. The model under study has wide applications in manufacturing systems and other service-oriented environments.

An Extended Objective Multi-Criteria Framework for Industrial Vendor Selection

Prabjot Kaur¹ Bijay Lal Pradhan² Aariya Kumari¹

¹ *Department of Mathematics, Birla Institute of Technology, Mesra, Ranchi, Jharkhand, India*

² *Department of Statistics, Amrit Campus, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: prabjotkaur@bitmesra.ac.in

Keywords: Entropy, WENSLO, TOPSIS, VIKOR, Vendor selection

Vendor selection in industry is a high-dimensional decision problem in which cost, quality, safety, and compliance must be traded off simultaneously. This paper develops a Multi-Criteria Decision Making (MCDM) framework and applies it to an industrial dataset of 33 vendors evaluated on 11 criteria. The framework is deliberately constructed as an Entropy–WENSLO–TOPSIS–VIKOR method. Criterion importance is derived from three distinct objective schemes—CRITIC, which rewards criteria that are both dispersed and non-redundant; MEREC, which measures the disturbance caused by deleting a criterion; and the Standard Deviation method, retained as a transparent baseline. The three vectors are fused by a normalised geometric mean, which penalises disagreement and prevents any single scheme from dominating. Eight ranking algorithms drawn from three different theoretical families are then applied: ARAS, COPRAS, WASPAS, and CoCoSo from the utility–aggregation family; EDAS, MABAC, and MARCOS from the reference–distance family; and PROMETHEE II from the outranking family. Their eight orderings are reconciled into a single consensus through Borda count and Copeland pairwise scoring, which agree almost perfectly ($\rho = 0.9999$). Validation is rank-based rather than score-based. Kendall’s coefficient of concordance yields $W = 0.9950$ ($\chi^2 = 254.71$, $df = 32$, $p < 0.001$), indicating near-total agreement among the eight methods; pairwise Spearman correlations never fall below 0.9840. Robustness is confirmed under five weighting regimes and eleven leave-one-criterion-out trials, where the mean absolute rank displacement is only 0.912 positions. The framework identifies A269, BF29, CB14, PB74, and SC67 as the leading suppliers, with A269 and BF29 ranked first and second unanimously by all eight algorithms. A cross-framework comparison against the earlier study reproduces its broad ordering ($\rho = 0.9967$ against WENSLO) while resolving a specific and explicable disagreement concerning A269, whose rank of 11 under VIKOR is shown to arise from a single-criterion veto rather than from genuinely weak overall performance. The study demonstrates the robustness, applicability, and validity of the data-driven decision framework using MCDM.

4 Poster Presentation Abstracts

T052

Forecasting the NEPSE Index using ARIMA Modeling: A Time Series Analysis of Nepal Stock Exchange

Roshani Kumari Chaudhary¹

¹ *Department of Statistics, Amrit Campus, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: roshani589chy@gmail.com

Keywords: NEPSE Index, Time series forecasting, ARIMA model, Random-walk benchmark, Market efficiency

The proposed paper aims to analyze and forecast the NEPSE Index using univariate time-series analysis and the Autoregressive Integrated Moving Average (ARIMA) model. The study uses weekly closing values of the NEPSE Index covering from June 20/2010 to August 7/2026 comprising of 823 weekly observations. Descriptive statistics were used to summarize the characteristics of the series, while the Augmented Dickey-Fuller test was applied to assess stationarity. In order to identify the model, the autocorrelation and partial autocorrelation were analyzed. Candidate ARIMA models were estimated and compared using information criteria, followed by residual diagnostic testing and evaluation of forecast accuracy, including benchmarking against a random-walk model and rolling-origin cross-validation. The raw NEPSE Index series was found to be non-stationary (ADF test, $p = 0.33$) and became stationary after first differencing. Automated order selection on the raw series suggested ARIMA (0,1,0); however, residual diagnostics indicated significant remaining autocorrelation (Ljung-Box test, $p = 0.006$), suggesting an inadequate fit. Following logarithmic transformation, ARIMA (2,1,0) with drift was identified as the best-fitting model based on information criteria ($AIC = 3359.77$, $BIC = 3340.93$), while residual diagnostics indicated no significant remaining autocorrelation (Ljung-Box test, $p = 0.97$). On a 12-week holdout sample, the model achieved a mean absolute percentage error (MAPE) of 3.06%, compared with 1.92% for a naive random-walk benchmark without drift. To provide a more robust assessment of forecasting performance, rolling-origin (walk-forward) cross-validation was conducted across the sample period. The average MAPE was 3.911% for ARIMA (2,1,0) with drift and 3.914% for the random-walk-with-drift benchmark, indicating virtually identical forecasting performance. The twelve-week-ahead forecasts from the final ARIMA model indicated a mild upward movement in the NEPSE Index, from approximately 2,649 to 2,706 points, with prediction intervals widening at longer forecast horizons. These findings indicate that ARIMA (2,1,0) with drift provides a statistically adequate representation of the NEPSE Index, though its forecast accuracy is comparable to a naive random-walk benchmark, a finding consistent with weak-form market efficiency. The study supports the use of log-transformed benchmarked ARIMA models as an interpretable short-term forecasting tool and provides useful insights for investors and policymakers.

Predicting Mental Health Symptoms Using Everyday Digital Behavior: A Statistical Analysis

Shisham Joshi¹

¹ *Department of Statistics, Amrit Campus, Tribhuvan University, Kathmandu, Nepal*

Corresponding author: joshishisham3@gmail.com

Keywords: Digital behavior, Screen time, Social media use, Night-time phone use, Depression, Anxiety, PHQ-9, GAD-7, Multiple linear regression, t-test, ANOVA, Chi-square

The growing use of smartphones and social media has drawn increasing attention to the relationship between everyday digital behavior and mental health. This study examined the association between digital behavior and depressive and anxiety symptoms among 392 individuals aged 18 years and above using a quantitative cross-sectional design. Data were collected through an online questionnaire. The Screen Time Index (STI), Social Media Index (SMI), Night-Time Risk Index (NTI-R) were constructed from various data collected. Data were analyzed using descriptive statistics, correlation analysis, multiple linear regression, t-tests, ANOVA, and chi-square tests. Results showed that all three digital-behavior indices were significantly and positively associated with depressive and anxiety symptoms. SMI and NTI-R were significant positive statistical predictors of both outcomes, whereas STI was not an independent predictor. The regression models explained 16.0% of the variance in PHQ-9 scores and 14.5% in GAD-7 scores. Collinearity diagnostics indicated no evidence of multicollinearity among the digital-behavior indices, with all variance inflation factors ($VIF < 1.4$) well below the conventional threshold. Female respondents reported higher depressive and anxiety symptom scores, while relationship status was significantly associated with both outcomes; residence showed no significant association. These findings suggest that social-media engagement and night-time phone use may be more strongly associated with mental health symptoms than overall screen time. However, due to the cross-sectional design, the findings reflect statistical associations rather than causal effects or clinical diagnoses.

Can Data Provenance and Source Reliability Improve the Reliability of Generative AI?

Shubham Khanal¹

¹ *Bachelors in Data Science, Kathmandu University, Nepal*

Corresponding author: mail2shubhamkha@gmail.com

Keywords: Generative AI, Large language models, Source reliability

Generative AI systems increasingly use information from a wide range of sources, including academic publications, government websites, news articles, online content, and AI-generated material. While having access to more information can improve the usefulness of these systems, sources can differ greatly in their accuracy, reliability, and independence. When unreliable information is accepted as trustworthy, AI-generated responses can spread misinformation and lead users to make poorly informed decisions. As AI-generated and duplicated content becomes more common, it is becoming increasingly important for AI systems to distinguish reliable evidence from misleading or repeated information. While existing research has extensively examined AI reliability, misinformation, synthetic data, and model degradation, less is known about how generative AI systems weigh conflicting evidence when information about its sources is available. In particular, it remains unclear whether models can prioritize a smaller amount of reliable and independent evidence over a larger amount of unreliable or repeated information. The study aims to explore whether providing AI with information about the origin and reliability of its sources can improve the accuracy of its responses. The study will use two main methods: a literature review and a controlled experiment. The literature review will examine existing research on generative AI reliability, misinformation, source credibility, data provenance, synthetic data, and model collapse. The experiment will use commercially available generative AI models, including DeepSeek, GPT, and Gemini, through a context-injection approach. The models will be given the same factual questions and sets of supporting information, while the information provided about those sources will be changed across three experimental conditions: (1) sources presented without additional information, (2) sources labelled by type and origin, (3) and sources provided with information about their reliability and independence. The questions will focus on general factual topics with answers that can be independently verified. AI responses will be evaluated using factual accuracy, error rate, and self-reported confidence on a defined scale. Confidence will be treated as the model's stated level of certainty rather than access to its underlying probability scores. The study will also examine situations where several sources support the same claim but are copies or derived from the same original source, testing whether AI systems distinguish between the number of sources and the amount of independent evidence. Based on the findings, the study will also consider a potential direction for developing more reliable and trustworthy AI systems, in which models are designed to evaluate source type, provenance, reliability, and independence before relying on information. Such a source-aware approach could provide a basis for future retrieval or training methods that encourage AI systems to prioritize the quality and independence of evidence rather than simply the quantity of available information.

AI-Powered Acoustic Waste Classification for Automated Waste Segregation Using a Lightweight 1D-CNN

Shubham Kayastha¹, Ankit Palanchoke¹, Sushan Sakha¹, Swikar Shrestha¹, Ram Chandra Dhungana¹

¹ *Department of Mathematics, School of Science, Kathmandu University, Dhulikhel, Nepal*

Corresponding author: dhungana.ramchandra@gmail.com

Keywords: Acoustic waste classification, Automated waste segregation, 1D-CNN, Mel-Filterbank energy, Edge AI, ESP32, Smart waste management

Graph neural networks (GNNs) are increasingly employed for incomplete tabular data without an inherent graph, requiring a graph to be constructed from feature similarity and used as a fixed input. In this regard, neutrosophic graph reconstruction is utilized to represent the uncertainty introduced during construction. Different similarity definitions may select different edges from the same data, a rule may change its edge selections after small feature perturbations, and some record pairs may have too few originally observed features for reliable comparison. Existing pipelines often ignore these sources or aggregate them into a single indeterminacy value. Using four density-matched construction rules and repeated feature subsampling, each candidate edge is described by three measured quantities: support across rules; a signed measure of whether disagreement between rules or instability within a rule dominates; and an observability measure of the information available before imputation. These quantities are measured from the data rather than assigned manually. During message passing, support determines how much information is transmitted through an edge, while the source of uncertainty determines how that information is transformed. The neutrosophic mapping evaluated here combines disagreement, instability, and limited observability into a single indeterminacy value, whereas the source-conditioned form preserves their distinctions. Four groups will be compared under increasing levels of missing data: non-graph methods, conventional GNNs on constructed graphs, an aggregated-neutrosophic GNN, and the source-conditioned scheme examined here. These comparisons will assess whether preserving the source of structural uncertainty, rather than collapsing it into a single value, can improve classification reliability as data become increasingly incomplete.

5 Conference Programme

Day 1 – 20 September 2026

Time	Activity									
08:15–09:30	Registration									
09:30–10:10	Keynote Lecture I at CV Raman Hall Title: From Hazard Ratios to Time Ratios: An Overview of Proportional Hazards and Accelerated Failure Time Models for Time-to-Event Data Speaker: Prof. Dr. Shankar Prasad Khanal									
10:10–10:50	Keynote Lecture II Title: Ambient Particulate Air Quality Situation in Nepal: A Spatial and Temporal Disaggregation Analysis Speaker: Prof. Dr. Srijan Lal Shrestha									
10:50–11:20	Invited Lecture I Title: The Geometry of High Dimensions Speaker: Shree Ram Khadka, Santosh Gnwali									
11:20–12:00	Inaugural Session at CV Raman Hall									
12:20–13:20	Parallel Oral Sessions I and II									
	<table><tr><th>Area</th><th>Room</th><th>Papers</th></tr><tr><td>Statistical Theory, Methodology, Bayesian & Emerging Statistical Methods</td><td>CV Raman Hall</td><td>Link Session 1</td></tr><tr><td>Environmental Statistics, Climate Change, Agriculture & Sustainability</td><td>Senate Hall</td><td>Link Session 2</td></tr></table>	Area	Room	Papers	Statistical Theory, Methodology, Bayesian & Emerging Statistical Methods	CV Raman Hall	Link Session 1	Environmental Statistics, Climate Change, Agriculture & Sustainability	Senate Hall	Link Session 2
Area	Room	Papers								
Statistical Theory, Methodology, Bayesian & Emerging Statistical Methods	CV Raman Hall	Link Session 1								
Environmental Statistics, Climate Change, Agriculture & Sustainability	Senate Hall	Link Session 2								
12:20–15:20	Online Keynote and Parallel Session Kenote Title: Phase-wise Analysis of the Bowling Performance of Cricketers in the Nepal Premier League Speaker: Dibyojyoti Bhattacharjee									
	<table><tr><th>Online Area Sessions</th><th>Link</th><th>Papers</th></tr><tr><td>Statistics and Data Science all online</td><td>Zoom Link</td><td>Link</td></tr></table>	Online Area Sessions	Link	Papers	Statistics and Data Science all online	Zoom Link	Link			
Online Area Sessions	Link	Papers								
Statistics and Data Science all online	Zoom Link	Link								
13:20–14:00	Lunch Break									
14:00–15:45	Parallel Oral Sessions III and IV									
	<table><tr><th>Area</th><th>Room</th><th>Papers</th></tr><tr><td>Modern Statistics, Data Science, Artificial Intelligence & Machine Learning</td><td>CV Raman Hall</td><td>Link Session 3</td></tr><tr><td>Biostatistics, Public Health & Medical Statistics</td><td>Senate Hall</td><td>Link Session 4</td></tr></table>	Area	Room	Papers	Modern Statistics, Data Science, Artificial Intelligence & Machine Learning	CV Raman Hall	Link Session 3	Biostatistics, Public Health & Medical Statistics	Senate Hall	Link Session 4
Area	Room	Papers								
Modern Statistics, Data Science, Artificial Intelligence & Machine Learning	CV Raman Hall	Link Session 3								
Biostatistics, Public Health & Medical Statistics	Senate Hall	Link Session 4								
15:45–16:00	Tea Break									
13:00–16:00	Poster Presentation Session									

Day 2 – 21 September 2026

Time	Activity									
09:30–10:00	Keynote Lecture IV at CV Raman Hall Title: Lean AI: From Scaling Walls to Sustainable Intelligence — A Fitness Era Framework for Efficient, Equitable, and Edge-Ready Artificial Intelligence Speaker: Prof. Dr. Sudan Jha									
10:00–10:30	Keynote Lecture V Title: From Static to Dynamic Survival Prediction: Bridging Landmarking, Competing Risks, and Machine Learning Speaker: Md Hasinur Rahaman Khan, PhD									
10:30–10:55	Invited Lecture II Title: Natural Language Processing (NLP) of Nepali Audio Files and Text Analytics Speaker: Shital Bhandary									
10:55–11:20	Invited Lecture III Title: Small Area Estimation of Mortality for Countries with Limited and Scarce Data: Nepal as a Case Study Speaker: Jyoti U. Devkota									
11:20–13:20	Parallel Oral Sessions V and VI <table><tr><th>Area</th><th>Room</th><th>Papers</th></tr><tr><td>Economic, Financial, Business & Risk Analytics - I</td><td>CV Raman Hall</td><td>Link Session 5a</td></tr><tr><td>Statistics for Governance, Policy & Inter-disciplinary Applications</td><td>Senate Hall</td><td>Link Session 6</td></tr></table>	Area	Room	Papers	Economic, Financial, Business & Risk Analytics - I	CV Raman Hall	Link Session 5a	Statistics for Governance, Policy & Inter-disciplinary Applications	Senate Hall	Link Session 6
Area	Room	Papers								
Economic, Financial, Business & Risk Analytics - I	CV Raman Hall	Link Session 5a								
Statistics for Governance, Policy & Inter-disciplinary Applications	Senate Hall	Link Session 6								
13:20–14:00	Lunch Break									
14:00–15:00	Parallel Oral Sessions VII and VIII <table><tr><th>Area</th><th>Room</th><th>Papers</th></tr><tr><td>Economic, Financial, Business & Risk Analytics -II</td><td>CV Raman Hall</td><td>Link Session 5b</td></tr><tr><td>Demography, Population Studies & Social Statistics</td><td>Senate Hall</td><td>Link Session 7</td></tr></table>	Area	Room	Papers	Economic, Financial, Business & Risk Analytics -II	CV Raman Hall	Link Session 5b	Demography, Population Studies & Social Statistics	Senate Hall	Link Session 7
Area	Room	Papers								
Economic, Financial, Business & Risk Analytics -II	CV Raman Hall	Link Session 5b								
Demography, Population Studies & Social Statistics	Senate Hall	Link Session 7								
13:00–15:00	Poster Presentation Session (In front of Conference Hall)									
15:00–15:30	Valedictory Session and Closing Ceremony at CV Raman Hall									
15:30–16:00	Networking Tea									

6 Technical Papers

ID	Paper Title	Page
T001	From Anti-Spoofing to Trustworthy Audio Forensics: A Bibliometric and Science-Mapping Review of Audio Deepfake Detection Prawesh Bhandari, Prashansha Neupane, Arju Marasini and Bishwas Sharma	9
T002	Unequal Education-to-Work Pathways: Gendered Labour-Force Exclusion and SDG Interlinkages in Nepal Arju Marasini, Prashanna Neupane, and Christopher Mbiba	9
T003	An Enhanced Air Quality Index for Multi-Pollutant Air Quality Assessment Ronit Paul, Tanusree Deb Roy, and Dibyojyoti Bhattacharjee	11
T004	Distributional and Stochastic Properties of Concomitants of Order Statistics from the Clayton Copula-Based Bivariate Gamma Distribution Ruhiteswar Choudhury and Tanusree Deb Roy	12
T005	Consumer Shopping Culture in Marts and Departmental Stores: Evidence from Ward of Kathmandu Metropolitan City Daman Bahadur Singh, Bishnu Raj Kafle	13
T006	Comparison of the predictive performance of machine learning models for predicting low birthweight among live births in Nepal using data from the Nepal Demographic and Health Survey 2022 Krishna Bahadur G.C., Amit Arjyal, Haris Khurram, and Apiradee Lim	14
T007	Classical and Objective Bayesian Approaches to Estimating the Process Capability Index Cpc for the Dhillon Process Distribution Abhimanyu Singh Yadav	15
T008	Determinants of Dairy Milk Production: Perceived Climate Stressors and Adaptation Practices among Lowland Farmers of Eastern Nepal Dilli Ram Sedai, Nuttaya Yuangyai, Kuaanan Techato, Basan Shrestha	16
T009	A Machine Learning-Based Framework for Tomato Maturity and Sweetness Classification in Smart Agriculture Joy Deb, Suraj Roy, and Dibyojyoti Bhattacharjee	17
T010	Truncated Shanker Distribution with Properties and Applications Y. Sanjoy Kumar Singha and Rama Shanker	18
T011	Quantifying the Quality of Water of Some Naturally Occurring Perennial Lakes of South Assam, India	19

Continued on next page

ID	Paper Title	Page
	Subham Roy and Dibyojyoti Bhattacharjee	
T012	Inference on stress-strength reliability using product spacing function for the inverted exponentiated gamma distribution with application to the electrode breakdown times data Rajeev Kumar	20
T013	Do More Words Change Minds? Tracing Sentiment Transitions in Nepali Political Tweets Durga Pokharel	21
T014	Knowledge, Attitude and Preventive Practices Regarding Dengue Fever Among Residents of Slum Area in Butwal Sub-Metropolitan City, Rupandehi Asha Kunwar	22
T015	Multivariate Statistical Modeling for the Analysis of NEPSE Stock Index Shanti Ram Subedi and Rabindra Kayastha	23
T016	Determinants of Birth Weight in Nepal: A Bayesian Quantile Regression Analysis of Pooled Nepal Demographic and Health Survey 2011–2022 Data Hari Prasad Upadhyay, Roshan Kumar Mahato, Keshav Raj Bhandari, Krishna Sagar Sharma, Prativa Sedain, Kyaw Min Htike	24
T017	Foreign Direct Investment and Economic Growth in Nepal: Evidence from ARDL and ARIMA Forecasting Models Dipen Satyal and Bijay Lal Pradhan	25
T018	Predicting the Real GDP and Its Growth Rate at Producer's Price for Next Five Years: Macroeconomic and Financial Situation Puja Kandel	26
T019	Impact of Electronic Human Resource Management Practices on Employees' Job Satisfaction in the Banking Sector Shankar Kumar Rawat	27
T020	Cubic Transmuted Nadarajah-Haghighi Distribution: Properties, Estimation and Application Hom Nath Baral, Surinder Kumar, Siddharth	28
T021	Adaptation Strategies as Mediators of the Effects of Economic, Socio-cultural, and Environmental Drivers on Migration Intentions in Nepal Madhab Prasad Baral, Vikash Kumar K. C.	29
T022	Neurodevelopment Outcomes of Neonates with Document Sepsis-A Prospective Cohort Study	30

Continued on next page

ID	Paper Title	Page
T023	Swechhya Vaidya, Manu Raj, Remya Sudevan, Shailendra Bir Karmacharya, Kalpana Subedi, Ganendra Bhakta Raya, Dhurba Shrestha Study of Statistical Properties of a Non-Monotonic Hazard Model: An Application to Real-Life Data from Engineering and Medical Sciences Abhiraj Bhattacharya, Brijesh P. Singh	32
T024	Exploring Timing of Most Recent Conception: A Data Driven Stochastic Modeling Brijesh P. Singh	33
T025	Ranking Strategic Retail Items by Transaction Quality: Matched Excess Extra-Category Attached Value Shusan Khatiwada, Sulav Pokharel, Nayan Pandey, Bhumika Magar	34
T026	Statistical Insight and Human-Centered Data Science: Reimagining Governance, Risk, and Development Pathways in Nepal's Federal Transition Purna Bahadur Karki Ph.D.	35
T027	Wealth on Paper, Poverty in Pocket: A Latent Class and Ordinal Logit Analysis of Subjective Economic Well-Being in Nepal Govind Jnawali, Rabindra Kayastha	36
T028	Factors Associated with Health-Symptoms Among Agrochemical-Using Farmers in Bharatpur Metropolitan City, Chitwan Samir Chapagain	37
T029	Seasonality Trends in Child Deaths in India: A Directional Statistical Approach Abhishek Saraswat	38
T030	Statistical Modelling of Anxiety Level Among Public and Private Students at Higher Secondary Level Himani Neupane	39
T031	An Extended Technology Acceptance Model (TAM) For Behavioral Intention To Adopt Digital Payment: A Study Of University Students Saurav Raj Paudel	40
T032	Factors Affecting Child Nutritional Status In Nepal: A Secondary Data Analysis Using Nepal Demographic & Health Survey (NDHS) 2022 Ashok Upadhyay	41

Continued on next page

ID	Paper Title	Page
T033	Determinants of Graduate Students' Satisfaction with Facilities and Services at the Central Departments of Institute of Science and Technology, Tribhuvan University Neha Rai	42
T034	Analyzing Factor Associated With Most Recent Closed Birth Interval Using Classification and Regression Tree Modelling Approach Ayushi Chourasiya, Brijesh Pratap Singh	43
T035	Statistical Distribution of Annual Tree Growth in the Nepal Himalaya Bidur Nepal, Arun Kumar Chaudhary	44
T036	An Investigation of Reproductive Complications and Intrauterine Device Users in Uttar Pradesh, India Anushka Singha	45
T037	People's Knowledge of Climate Change's Impact on Tourism in the Annapurna Conservation Area, Nepal, by Developing A Climate Change Knowledge Index Rajendra Prasad Upadhyaya, Vikash Kumar K.C.	46
T038	Forecasting Nepal's Nominal Gross Domestic Product Using The Box-Jenkins ARIMA Methodology Udaya Bahadur Bohora, Bijay Lal Pradhan	47
T039	Awareness Regarding Autism Among Parents Attending A Teaching Hospital In Lalitpur, Nepal: A Cross-Sectional Study Mitra Rai, Sandhya Budhathoki	48
T040	Computational Analysis of the Effects of Stenosis Height and Width on Two-Layered Blood Flow Through an Artery With Bell-Shaped Stenosis Kedar Nath Chhatkuli, Chudamani Pokharel, Jeevan Kafle	49
T041	Performance Evaluation of Machine Learning Classification Algorithms for Infectious Disease Prediction Using Inpatient Records From Nepalese Hospitals Sarad Chandra Kafle, Mohit Nain, Ekta Hooda, Bhagawoti Sharma	50
T042	Distributional Pattern of Labor Productivity in Manufacturing Industries of Nepal Eak Raj Kadariya, Ram Prasad Khatiwada	51
T043	Parameter-Efficient Domain Adaptation and Preference Alignment of an Open Large Language Model for Nepal's Electricity-Sector Regulatory Corpus	52

Continued on next page

ID	Paper Title	Page
	Bhagat Pandey, Aakash Bhusal	
T044	A Multilevel Mixed-Effects Analysis of Barriers to Healthcare Access among Women of Reproductive Age in Nepal Krishna Ram Lamichhane	52
T045	A Hybrid CNN–Random Forest Approach for Plant Disease Detection Anjal Ghimire, Ashmita Timalsina	54
T046	Statistical Analysis of Knowledge and Practice of Sexual and Reproductive Health Rights Among Married Women of Reproductive Age at Lamahi Municipality, Dang, Nepal Deepjyoti Khanal	55
T047	Unveiling Nepal’s Data Revolution: The Role of Statistical Decision-Making in Advancing the Sustainable Development Goals Binaya Rijal	56
T048	Neuromorphic Computing and Spiking Neural Networks: A Brain-Inspired Pathway Toward Artificial General Intelligence Madhu Ajit Pandey	57
T049	A Comparison of Open-source and Proprietary Analytics in Innovative Statistical Applications, Spanning Statistical Methods and Software to Intelligent Data Analysis Poudel Nabaraj	58
T050	Beyond Distance-Decay: A Graph Attention Network for Interpretable District-Interaction Analysis in Nepal’s Sub-National Education System Anmol Adhikari	59
T051	Statistics in the Context of Modern Data Science and AI: A Case Study in Explainable Policy Analytics Sumedha Sedhain	60
T052	Forecasting the NEPSE Index using ARIMA Modeling: A Time Series Analysis of Nepal Stock Exchange Roshani Kumari Chaudhary	76
T053	Predicting Mental Health Symptoms Using Everyday Digital Behavior: A Statistical Analysis Shisham Joshi	77
T054	Empirical Evaluation of Sorting Algorithm Performance Under Heterogeneous Processor Architectures: A Statistical Comparison Ayush Singh, Saksham Pant, Arnav Shrestha, Laxmi Bhattarai	61

ID	Paper Title	Page
T055	Comparative Spectral Analysis of Network Robustness Under Node and Edge Failures Saksham Pant, Ayush Singh, Arnav Shrestha, Laxmi Bhattarai	62
T056	Can Data Provenance and Source Reliability Improve the Reliability of Generative AI? Shubham Khanal	78
T057	Comparative Performance of Value-at-Risk and Expected Shortfall Under Heavy-Tailed and Volatile Market Conditions: A Statistical Backtesting Approach Arnav Shrestha, Ayush Singh, Saksham Pant, Laxmi Bhattarai	63
T058	Structural Uncertainty in Constructed Graphs: A Message-Passing Scheme for Incomplete Data Aaditya Sapkota, Harish Chandra Bhandari	64
T059	AI-Powered Acoustic Waste Classification for Automated Waste Segregation Using a Lightweight 1D-CNN Shubham Kayastha, Ankit Palanchoke, Sushan Sakha, Swikar Shrestha, Ram Chandra Dhungana	79
T060	Assessing Human Development through Life Satisfaction: Evidence from Bagmati Province of Nepal Shanta Gautam, Ishwari Banjade	65
T061	Association Between Physical Activity, Menstrual Cycle Characteristics and Body Weight in Adolescent Girls in Western Nepal Keshav Raj Bhandari	66
T062	Additive Lomax Distribution: Mathematical Properties, Statistical Inference and Applications in Real Data Govinda Prasad Dhungana, Kiran Bhattarai, Nisha Lamichhane	67
T063	Statistical and Data-Driven Modeling for Real-Time Public Bus Management in Kathmandu Valley Rabin Rachalica	68
T064	Factors Affecting Quality of Education on Student Satisfaction Between Self-Sustain and Regular Programs at Tribhuvan University Gopal Prasad Sedhai, Murari Karki	69
T065	Rethinking Workplace Well-Being: Transforming Occupational Stress into Sustainable Employee Performance Gobind Kumar Singh	70

Continued on next page

ID	Paper Title	Page
T066	Whether or Not Hydropower Development Policy, 2001 Catches Investors' Expectations? Dhun Bahadur Budhathoki	71
T067	Nepali Vehicle Number Plate Recognition Using YOLOv11 and CNN Keshab Raj Phulara, Prabin Manee Shrestha	72
T068	Machine Learning Framework for Wellness Prediction using Multidimensional Quality of Life Indicators Nabin Acharya	73
T069	Finite Queueing Model with Scheduled and Feedback Maintenance Ritu Basnet Thapa, Sushil Ghimire and Ram Prasad Ghimire	74
T070	An Extended Objective Multi-Criteria Framework for Industrial Vendor Selection Prabjot Kaur, Bijay Lal Pradhan and Aariya Kumari	75

Author Index

- Acharya Nabin, 73
Adhikari Anmol, 59
Arjyal, Amit, 14
- Banjade Ishwari, 65
Baral Hom Nath, 28
Baral Madhab Prasad, 29
Bhandari Harish Chandra, 64
Bhandari Keshav Raj, 66
Bhandari, Keshav Raj, 24
Bhandari, Prawesh, 9
Bhandary Shital, 7
Bhattacharjee, Dibyojyoti, 4, 11, 17, 19
Bhattacharya Abhiraj, 32
Bhattarai Kiran, 67
Bhattarai Laxmi, 61–63
Bhusal Aakash, 52
Bohora Udaya Bahadur, 47
Budhathoki Dhun Bahadur, 71
Budhathoki Sandhya, 48
- Chapagain Samir, 37
Chaudhary AK, 44
Chaudhary Roshani Kumari, 76
Chhatkuli Kedar Nath, 49
Choudhury, Ruhiteswar, 12
Chourasiya Ayushi, 43
- Deb, Joy, 17
Devkota Jyoti U., 8
Dhungana Govinda Prasad, 67
Dhungana Ram Chandra, 79
- G.C., Krishna Bahadur, 14
Gautam Shanta, 65
Ghimire Anjal, 54
Ghimire Ram Prasad, 74
Ghimire Sushil, 74
Gnwali Santosh, 6
- Hooda Ekta, 50
Htike, Kyaw Min, 24
- Jha, Sudan, 3
Jnawali Govind, 36
Joshi Shisham, 77
- K.C. Vikash Kumar, 29, 46
Kadariya Eak Raj, 51
Kafle Jeevan, 49
Kafle Sarad Chandra, 50
Kafle, Bishnu Raj, 13
Kandel Puja, 26
Karki Murari, 69
Karki Purna Bahadur, 35
Karmacharya Shailendra Bir, 30
Kaur Prabjot, 75
Kayastha Rabindra, 23, 36
Kayastha Shubham, 79
Khadka Shree Ram, 6
Khan Md Hasinur Rahaman, 5
Khanal Deepjyoti, 55
Khanal Shankar Prasad, 1
Khanal Shubham, 78
Khatiwada Ram Prasad, 51
Khatiwada Shusan, 34
Khurram, Haris, 14
Kumar Rajeev, 20
Kumar Surinder, 28
Kumari Aariya, 75
Kunwar Asha, 22
- Lamichhane Krishna Ram, 53
Lamichhane Nisha, 67
Lim, Apiradee, 14
- Magar Bhumika, 34
Mahato, Roshan Kumar, 24
Marasini, Arju, 9, 10
Mbiba, Christopher, 10
- Nain Mohit, 50
Nepal Bidur, 44
Neupane Himani, 39
Neupane, Prashanna, 10
Neupane, Prashansha, 9
- Palanchoke Ankit, 79
Pandey Bhagat, 52
Pandey Madhu Ajit, 57
Pandey Nayan, 34
Pant Saksham, 61–63

Paudel Saurav Raj, 40
Paul, Ronit, 11
Phulara Keshab Raj, 72
Pokharel Chudamani, 49
Pokharel Durga, 21
Pokharel Sulav, 34
Poudel Nabaraj, 58
Pradhan Bijay Lal, 25, 47, 75

Rachalica Rabin, 68
Rai Mitra, 48
Rai Neha, 42
Raj Manu, 30
Rawat Shankar Kumar, 27
Raya Ganendra Bhakta, 30
Rijal Binaya, 56
Roy, Subham, 19
Roy, Suraj, 17
Roy, Tanusree Deb, 11, 12

Sakha Sushan, 79
Sapkota Aaditya, 64
Saraswat Abhishek, 38
Satyal, Dipen, 25
Sedai Dilli Ram, 16
Sedain, Prativa, 24
Sedhai Gopal Prasad, 69
Sedhain Sumedha, 60
Shanker, Rama, 18
Sharma Bhagawoti, 50
Sharma, Bishwas, 9

Sharma, Krishna Sagar, 24
Shrestha Arnav, 61–63
Shrestha Basan, 16
Shrestha Dhurba, 30
Shrestha Prabin Manee, 72
Shrestha Srijan Lal, 2
Shrestha Swikar, 79
Siddharth, 28
Singh Ayush, 61–63
Singh Brijesh P., 32, 33
Singh Brijesh Pratap, 43
Singh Gobind Kumar, 70
Singh, Daman Bahadur, 13
Singha Anushka, 45
Singha, Y. Sanjoy Kumar, 18
Subedi Kalpana, 30
Subedi Shanti Ram, 23
Sudevan Remya, 30

Techato Kuaanan, 16
Thapa Ritu Basnet, 74
Timalsina Ashmita, 54

Upadhayaya Rajendra Prasad, 46
Upadhyay Ashok, 41
Upadhyay, Hari Prasad, 24

Vaidya Swechhya, 30

Yadav, Abhimanyu Sing, 15
Yuangyai Nuttaya, 16