

Workstation Setup

Install Chef - <http://www.getchef.com/chef/install>

Get Chef - <http://www.getchef.com>

```
$ curl -L http://www.getchef.com/chef/install.sh | sudo bash
$ cd chef-repo
$ ls -al
$ ls .chef
```

chef-repo/.chef/knife.rb

```
current_dir = File.dirname(__FILE__)
log_level           :info
log_location        STDOUT
node_name           "USERNAME"
client_key           "#{current_dir}/USERNAME.pem"
validation_client_name "ORGNAME-validator"
validation_key       "#{current_dir}/ORGNAME-validator.pem"
chef_server_url      "https://api.opscode.com/organizations/ORGNAME"
cache_type           'BasicFile'
cache_options( :path => "#{ENV['HOME']}/.chef/checksums" )
cookbook_path        ["#{current_dir}/../cookbooks"]

$ knife --version
$ knife client list
$ knife help list
```


Organization Setup

Click the "Administration" tab,


Select the appropriate Organization

Click "Invite User" from the left menu


Enter your classmate's 'Chef Username' and click Invite

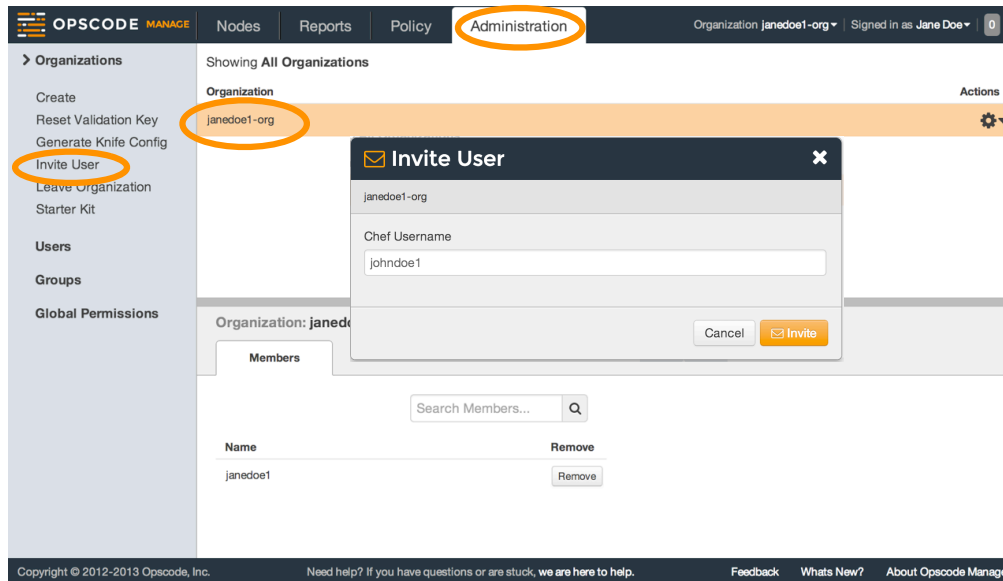

Click the notification, select the Organization and click 'Accept'

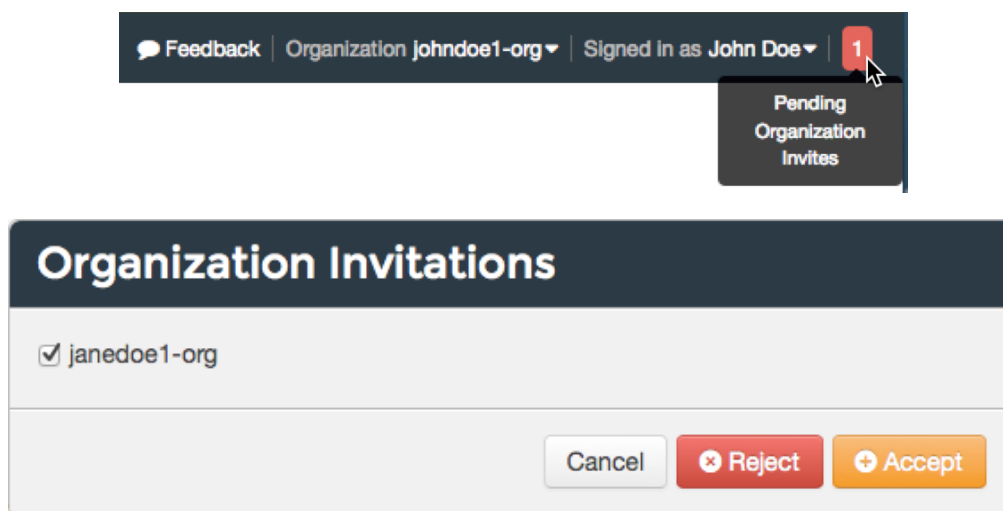


Select your classmate's organization from the drop down list and peruse their org

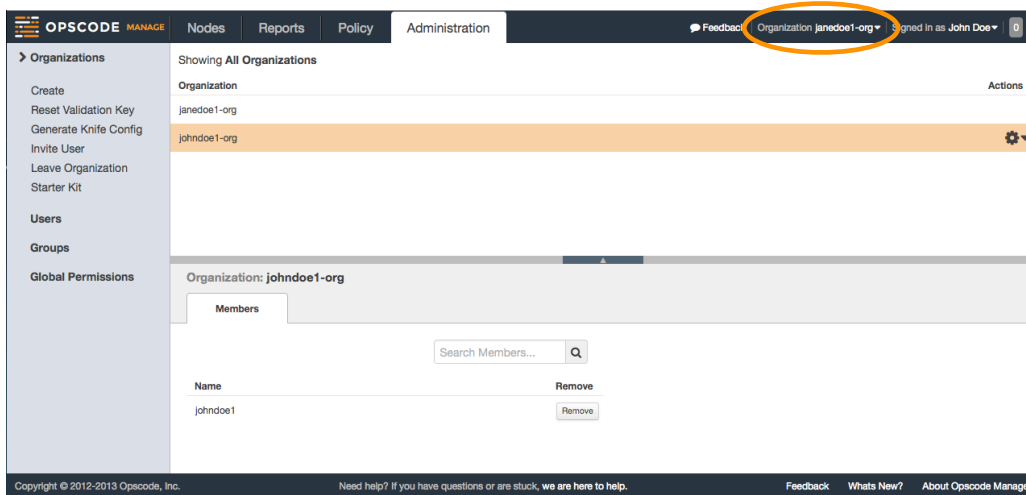

The screenshot shows the 'Administration' tab in the Opscode Manage interface. The sidebar on the left lists various actions under 'Organizations', with 'Leave Organization' circled in orange. The main content area shows a list of organizations, with 'johndoe1-org' selected and highlighted in orange. Below this, the 'Members' tab is active, showing a list of members with a 'Remove' button circled in orange.

Now either 'Leave Organization' you've been invited into, or remove your classmate from your organization

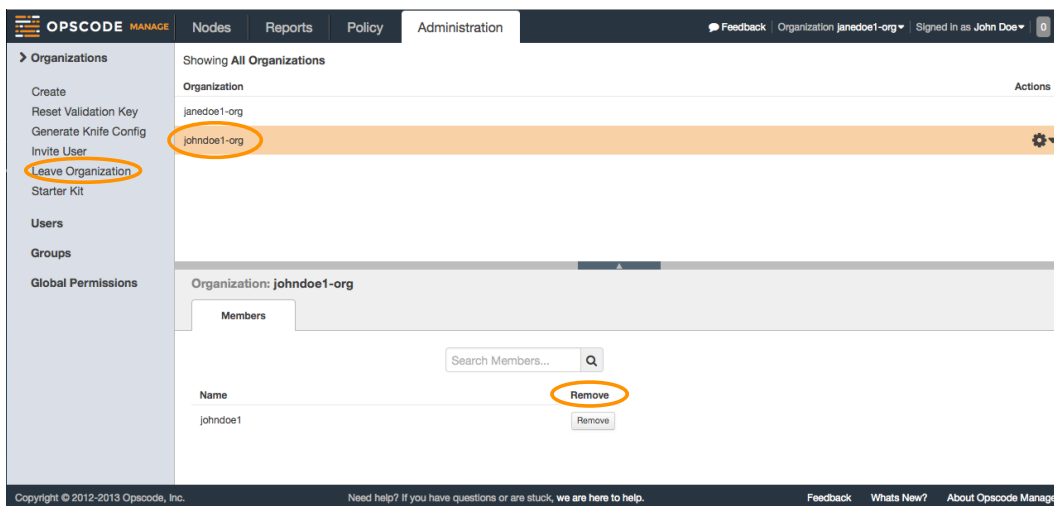

This screenshot shows the same 'Administration' page, but with the 'Remove' button in the members list circled in orange. The 'Leave Organization' option in the sidebar is also circled in orange. The 'johndoe1-org' is still selected in the organization list.

Node Setup

```
$ knife bootstrap <EXTERNAL_ADDRESS> --sudo -x chef -P chef -N "node1"
```

```
$ ssh chef@IPADDRESS
```

```
chef@node1:~$ ls /etc/chef
```


```
chef@node1:~$ which chef-client
```

```
chef@node1:~$ cat /etc/chef/client.rb
```

```
chef@node1:~$ sudo vi /etc/chef/client.rb
```

Set log_level to :info

View Node on Chef Server

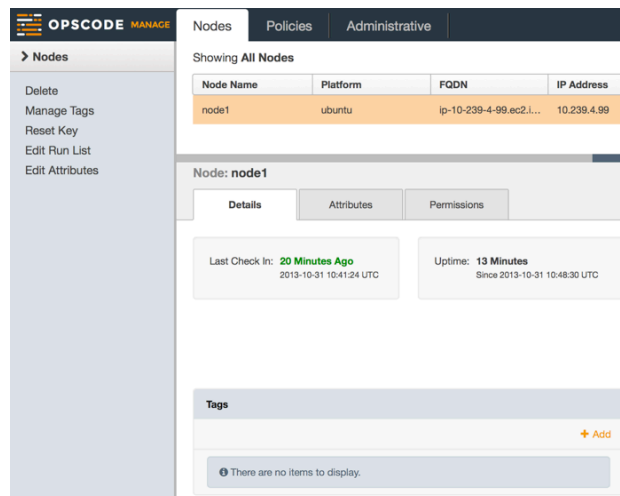

The screenshot shows the 'Nodes' tab in the Opscode Manage interface. A table lists all nodes, with 'node1' highlighted. Below the table, the 'Details' tab for 'node1' is selected, showing 'Last Check In: 20 Minutes Ago' and 'Uptime: 13 Minutes'. A 'Tags' section at the bottom indicates 'There are no items to display.'

Node Name	Platform	FQDN	IP Address
node1	ubuntu	ip-10-239-4-99.ec2.i...	10.239.4.99

Node: node1

Details | Attributes | Permissions


Last Check In: **20 Minutes Ago**
2013-10-31 10:41:24 UTC

Uptime: **13 Minutes**
Since 2013-10-31 10:48:30 UTC

Tags

+ Add

There are no items to display.

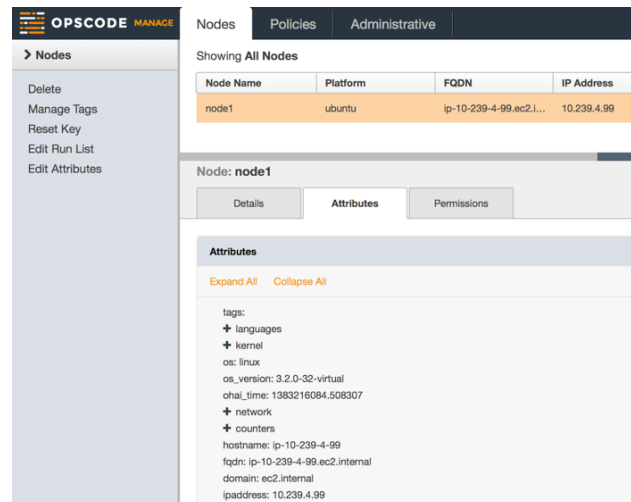

This screenshot shows the 'Attributes' tab for 'node1'. It displays a list of attributes including 'tags', 'languages', 'kernel', 'os', 'os_version', 'ohai_time', 'network', 'counters', 'hostname', 'fqdn', 'domain', and 'ipaddress'.

Node: node1

Details | Attributes | Permissions

Expand All | Collapse All

tags:

- + languages
- + kernel
- os: linux
- os_version: 3.2.0-32-virtual
- ohai_time: 1383216084.508307
- + network
- + counters
- hostname: ip-10-239-4-99
- fqdn: ip-10-239-4-99.ec2.internal
- domain: ec2.internal
- ipaddress: 10.239.4.99

Chef Resources and Recipes

```
$ knife cookbook create apache
$ ls -la cookbooks/apache
```

cookbooks/apache/recipes/default.rb

```
package "httpd" do
  action :install
end
```

```
service "httpd" do
  action [ :enable, :start ]
end
```

```
cookbook_file "/var/www/html/index.html" do
  source "index.html"
  mode "0644"
end
```

cookbooks/apache/files/default/index.html

```
<html>
<body>
  <h1>Hello, world!</h1>
</body>
</html>
```

```
$ knife cookbook upload apache
$ knife node run_list add node1 "recipe[apache]"
chef@node1:~$ sudo chef-client
```

Introducing the Node Object

```
$ knife node list
$ knife client list
$ knife node show node1
chef@node1:~$ sudo ohai | less
$ knife node show node1 -l
$ knife node show node1 -Fj
$ knife node show node1 -a fqdn
$ knife search node "*" "*" -a fqdn
```

Node Attributes

cookbooks/apache/attributes/default.rb

```
default["apache"]["indexfile"] = "index1.html"
```

cookbooks/apache/files/default/index1.html

```
<html>
  <body>
    <h1>Hello, world!</h1>
    <h2>This is index1.html</h2>
    <p>We configured this in the attributes file</p>
  </body>
</html>
```

cookbooks/apache/recipes/default.rb

```
cookbook_file "/var/www/html/index.html" do
  source node["apache"]["indexfile"]
  mode "0644"
end
```

```
$ knife cookbook upload apache
chef@node1:~$ sudo chef-client
```

cookbooks/apache/recipes/default.rb

```
node.default["apache"]["indexfile"] = "index2.html"
cookbook_file "/var/www/html/index.html" do
  source node["apache"]["indexfile"]
  mode "0644"
end
```

cookbooks/apache/files/default/index2.html

```
<html>
  <body>
    <h1>Hello, world!</h1>
    <h2>This is index2.html</h2>
    <p>We configured this in the recipe</p>
  </body>
</html>
```

```
$ knife cookbook upload apache
chef@node1:~$ sudo chef-client
```


Attributes, Templates, and Cookbook Dependencies

Use knife to create a cookbook called 'motd' (command hidden)

```
cookbooks/motd/attributes/default.rb
default["motd"]["company"] = "Chef"
```

Add template resource to the motd cookbook's default recipe (cookbooks/motd/recipes/default.rb) for /etc/motd based on the source 'motd.erb'. (command hidden)

```
cookbooks/motd/templates/default/motd.erb
This server is property of <%= node["motd"]["company"] %>
<% if node["pci"]["in_scope"] -%>
  This server is in-scope for PCI compliance
<% end -%>
```

Use knife upload the 'motd' cookbook (command hidden)

Use knife to create a cookbook called 'pci' (command hidden)

```
cookbooks/pci/attributes/default.rb
default["pci"]["in_scope"] = true
```

Use knife upload the 'pci' cookbook (command hidden)

Use knife add 'recipe[motd]' to node1's run list (command hidden)

```
$ knife node show node1
chef@node1:~$ sudo chef-client
```

```
cookbooks/motd/metadata.rb
```

```
maintainer      "YOUR_COMPANY_NAME"
maintainer_email "YOUR_EMAIL"
license         "All rights reserved"
description     "Installs/Configures motd"
long_description IO.read(File.join(File.dirname(__FILE__),
`README.md`))
version        "0.1.0"
depends "pci"
```

Use knife upload the 'motd' cookbook (command hidden)

Rerun 'chef-client' on node1 (command hidden)

```
chef@node1:~$ cat /etc/motd
$ knife search node "pci:*" -a pci
```

`cookbooks/pci/attributes/default.rb`

```
default["pci"]["in_scope"] = false
```

Use knife upload the 'pci' cookbook (command hidden)

Rerun 'chef-client' on node1 (command hidden)

```
chef@node1:~$ cat /etc/motd
$ knife node show node1 -a pci
```

Template Variables, Notifications, and Controlling Idempotency

cookbooks/apache/metadata.rb

```
maintainer      "YOUR_COMPANY_NAME"
maintainer_email "YOUR_EMAIL"
license         "All rights reserved"
description     "Installs/Configures apache"
long_description IO.read(File.join(File.dirname(__FILE__),
  'README.md'))
version       "0.2.0"
```

cookbooks/apache/attributes/default.rb

```
default["apache"]["sites"]["clowns"] = { "port" => 80 }
default["apache"]["sites"]["bears"] = { "port" => 81 }
```

cookbooks/apache/recipes/default.rb

(See <https://gist.github.com/6781185>)

```
package "httpd" do
  action :install
end

service "httpd" do
  action [ :enable, :start ]
end

execute "mv /etc/httpd/conf.d/welcome.conf
/etc/httpd/conf.d/welcome.conf.disabled" do
  only_if do
    File.exist?("/etc/httpd/conf.d/welcome.conf")
  end
  notifies :restart, "service[httpd]"
end

node["apache"]["sites"].each do |site_name, site_data|
  document_root = "/srv/apache/#{site_name}"

  template "/etc/httpd/conf.d/#{site_name}.conf" do
    source "custom.erb"
    mode "0644"
    variables(:document_root => document_root, :port => site_data["port"])
    notifies :restart, "service[httpd]"
  end

  directory document_root do
    mode "0755"
    recursive true
  end

  template "#{document_root}/index.html" do
    source "index.html.erb"
    mode "0644"
    variables(:site_name => site_name, :port => site_data["port"])
  end
end
```

cookbooks/apache/templates/default/custom.erb

(See <https://gist.github.com/8955103>)

```
<% if @port != 80 -%>
  Listen <%= @port %>
<% end -%>

<VirtualHost *:<%= @port %>>
  ServerAdmin webmaster@localhost

  DocumentRoot <%= @document_root %>
  <Directory />
    Options FollowSymLinks
    AllowOverride None
  </Directory>
  <Directory <%= @document_root %>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride None
    Order allow,deny
    allow from all
  </Directory>
</VirtualHost>
```

cookbooks/apache/templates/default/index.html.erb

(See <https://gist.github.com/2866421>)

```
<html>
  <body>
    <h1>Welcome to <%= node["motd"]["company"] %></h1>
    <h2>We love <%= @site_name %></h2>
    <%= node["ipaddress"] %>:<%= @port %>
  </body>
</html>
```

Use knife upload the 'apache' cookbook (command hidden)
Rerun 'chef-client' on node1 (command hidden)

Troubleshoot the failure

Search

```
$ knife search node "*:*"
$ knife search node "ipaddress:10.*"
$ knife search node "*:*" -a ipaddress
$ knife search node "ipaddress:10.*" -a ipaddress
$ knife search node "ipaddress:10* AND platform_family:rhel"
$ knife search node "ipaddress:[10.0.* TO 10.2.*]"
```

cookbooks/apache/recipes/ip-logger.rb

```
search("node", "platform:centos").each do |server|
  log "The CentOS servers in your organization have the following
  FQDN/IP Addresses:- #{server["fqdn"]} / #{server["ipaddress"]}"
end
```

Use knife upload the 'apache' cookbook (command hidden)

Add the recipe 'apache::ip-logger' to node1's run list (command hidden)

Rerun 'chef-client' on node1 (command hidden)

Remove the recipe 'apache::ip-logger' from node1's run list (command hidden)

Recipe Inclusion, Data Bags, and Search

```
$ mkdir -p data_bags/users
$ knife data_bag create users
```

data_bags/users/bobo.json

```
{
  "id": "bobo",
  "comment": "Bobo T. Clown",
  "uid": 2000,
  "gid": 0,
  "home": "/home/bobo",
  "shell": "/bin/bash"
}
```

```
$ knife data_bag from file users bobo.json
```

Create another user in the users data bag called 'frank' (command hidden)

```
{
  "id": "frank",
  "comment": "Frank Belson",
  "uid": 2001,
  "gid": 0,
  "home": "/home/frank",
  "shell": "/bin/bash"
}
```

Use knife to upload frank's data_bag item(command hidden)

```
$ knife search users "*:*"
$ knife search users "id:bobo" -a shell
```

Create a data_bag called 'groups' (2 commands hidden)

data_bags/groups/clowns.json


```
{
  "id": "clowns",
  "gid": 3000,
  "members": [ "bobo", "frank" ]
}
```

Use knife to upload the 'clowns' data_bag item (command hidden)

Create a cookbook called 'users' (command hidden)

Edit the 'user' cookbook's default recipe and add the following

```
search(:users, ":*").each do |user_data|
  user user_data["id"] do
    comment user_data["comment"]
    uid user_data["uid"]
    gid user_data["gid"]
    home user_data["home"]
    shell user_data["shell"]
  end
end
include_recipe "users::groups"
```

cookbooks/users/recipes/groups.rb

```
search(:groups, ":*").each do |group_data|
  group group_data["id"] do
    gid group_data["gid"]
    members group_data["members"]
  end
end
```

Upload the 'users' cookbook (command hidden)

Use knife to add the 'users' cookbook's default receipt to node1's run list (command hidden)

Rerun 'chef-client' on node1 (command hidden)

```
chef@node1:~$ cat /etc/passwd
chef@node1:~$ cat /etc/group
```

Roles

roles/webserver.rb


```
name "webserver"
description "Web Server"
run_list "recipe[apache]"
default_attributes({
  "apache" => {
    "sites" => {
      "admin" => {
        "port" => 8000
      }
    }
  }
})
```

```
$ knife role from file webserver.rb
```

```
$ knife role show webserver
```

Use knife to search for roles that have the apache cookbook's default recipe in its run_list (command hidden)

Replace recipe[apache] with role[webserver] in run list

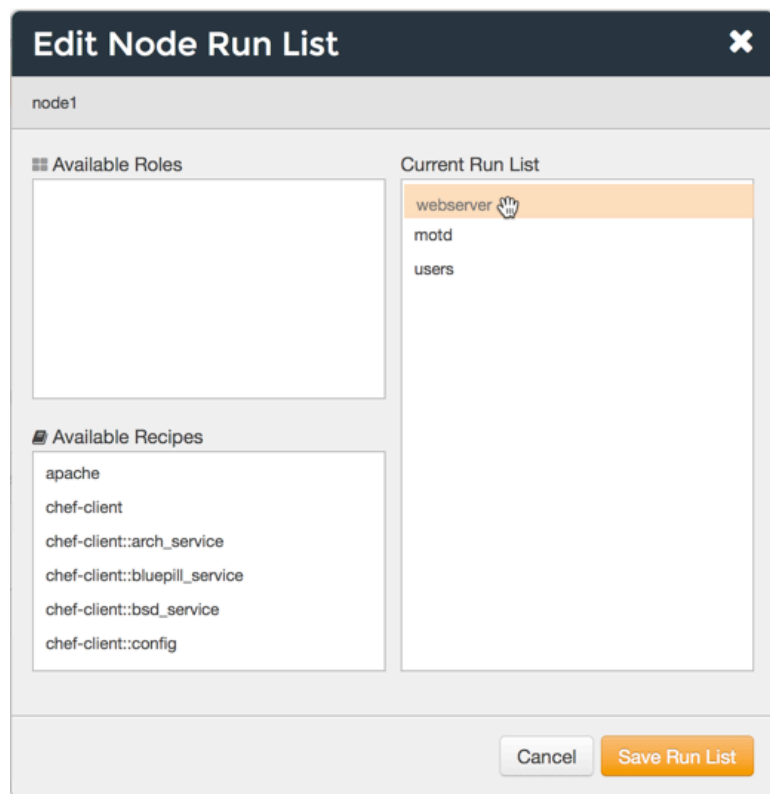

```
chef@node1:~$ sudo chef-client
$ knife search node "role:webserver" -a apache.sites
```

roles/webserver.rb

```
name "webserver"
description "Web Server"
run_list "recipe[apache]"
default_attributes({
  "apache" => {
    "sites" => {
      "admin" => {
        "port" => 8000
      },
      "bears" => {
        "port" => 8081
      }
    }
  }
})
```

Use knife to upload this webserver role & rerun chef-client (commands hidden)

Use knife to Display the 'apache.sites' attribute on all nodes with webserver role (command hidden)

Edit the 'base' role (command hidden)

```
name "base"
description "Base Server Role"
run_list "recipe[motd]", "recipe[users]"
```

Upload the 'base' role to Chef server (command hidden)

Edit the 'webserver' role (command hidden)

```
name "webserver"
description "Web Server"
run_list "role[base]", "recipe[apache]"
default_attributes({
  "apache" => {
    "sites" => {
      "admin" => {
        "port" => 8000
      },
      "bears" => {
        "port" => 8081
      }
    }
  }
})
```

Upload the 'webserver' role to Chef server (command hidden)

Rerun 'chef-client' on node1 (command hidden)

Environments

```
$ knife cookbook show apache
$ knife environment list
$ mkdir environments
```

environments/dev.rb

```
name "dev"
description "For developers!"
cookbook "apache", "= 0.2.0"
```

```
$ knife environment from file dev.rb
$ knife environment show dev
```

Use the UI to change your node's environment to "dev"

Policy Administration Feedback Organization johnf Signed in as John Fitzpatrick 0						
Search Nodes... Q						
Platform	FQDN	IP Address	Uptime	Last Check-In	Environment	Actions
ubuntu	ubuntu-target	10.0.2.15	4 days	3 hours ago	_default	

Attributes Permissions

go
10:31:53 UTC

Uptime: 4 Days
Since 2013-12-08 04:25:52 UTC

Environment:
Node environment changed from **_default** to **dev**.
Cancel Save

Platforms: ubuntu
FQDN: ubuntu-target
IP Address: 10.0.2.15

Rerun 'chef-client' on node1 (command hidden)

environments/production.rb

```
name "production"
description "For Prods!"
cookbook "apache", "= 0.1.0"
override_attributes({
  "pci" => {
    "in_scope" => true
  }
})
```

Use knife to upload this production environment (command hidden)

Use the UI to change your node's environment to "production" (Screenshot hidden)

Rerun 'chef-client' on node1 (command hidden)

Using Community Cookbooks

```
$ knife cookbook site search chef-client
$ knife cookbook site show chef-client
$ knife cookbook site download chef-client
$ tar -zxvf chef-client*.tar.gz -C cookbooks/
```

cookbooks/chef-client/recipes/delete_validation.rb

```
unless chef_server?
  file Chef::Config[:validation_key] do
    action :delete
    backup false
    only_if { ::File.exists?(Chef::Config[:client_key]) }
  end
end
```

roles/base.rb

```
name "base"
description "Base Server Role"
run_list "recipe[chef-client::delete_validation]", "recipe[motd]",
"recipe[users]"
```

cookbooks/chef-client/recipes/default.rb

```
include_recipe "chef-client::service"
```

cookbooks/chef-client/recipes/service.rb


```
supported_init_styles = [
  'arch',
  'bluepill',
  'bsd',
  'daemontools',
  'init',
  'launchd',
  'runit',
  'smf',
  'upstart',
  'winsw'
]
init_style = node["chef_client"]["init_style"]

# Services moved to recipes
if supported_init_styles.include? init_style
  include_recipe "chef-client::#{init_style}_service"
else
  log "Could not determine service init style, manual intervention
  required to start up the chef-client service."
end
```

Use knife to upload the 'chef-client' cookbook (command hidden)

Use knife to download the 'cron' cookbook (command hidden)

untar the 'cron' cookbook into the cookbooks directory (command hidden)

Use knife to upload the 'cron' cookbook (command hidden)

Use knife to upload the 'chef-client' cookbook (command hidden)

Use knife to download the 'logrotate' cookbook (command hidden)

untar the 'logrotate' cookbook into the cookbooks directory (command hidden)

Use knife to upload the 'logrotate' cookbook (command hidden)

Use knife to upload the 'chef-client' cookbook (command hidden)

Edit the 'base' role (command hidden)

```
name "base"
description "Base Server Role"
run_list "recipe[chef-client::delete_validation]", "recipe[chef-client]", "recipe[motd]", "recipe[users]"
```

Upload the 'base' role to Chef server (command hidden) Rerun 'chef-client' on node1 (command hidden)

Check the 'chef-client' service is running (command hidden) Use knife to download the 'ntp' cookbook (command hidden)

untar the 'ntp' cookbook into the cookbooks directory (command hidden)

Use knife to upload the 'ntp' cookbook (command hidden)

Edit the 'base' role (command hidden)

```
name "base"
description "Base Server Role"
run_list "recipe[chef-client::delete_validation]", "recipe[chef-client]", "recipe[ntp]", "recipe[motd]", "recipe[users]"
```

Upload the 'base' role to Chef server (command hidden)

Just Enough Ruby for Chef

Bonus Exercises

Exercise #1

Situation:

You need to learn more Ruby because you want to be a Chef ninja.

Tasks:

- Sign up for an account on codecademy.com and start doing the exercises in the Ruby track. <http://www.codecademy.com/tracks/ruby>