

Project 2

Bilguun Chinzorig, Monika Avila, Lkham Nyambuu
EPFL

Abstract—The aim of this project is to conduct a twitter sentiment analysis. Our goal is to classify untaged tweets into two groups: positive and negative. For this purpose, we begin our work by preprocessing the tweets and generate the dictionary. Following, we create the word space, i.e. matrix of embeddings using GloVe methodology. After, we span the tweet space by retrieving features from the embedding matrix. In addition to these features, we constructed additional variables that capture the meaning and the importance of the words as well as hashtags included in each tweet. Finally, we used our features in two types of classifiers: 1. Random Forests and 2. SVM. We conclude that random forests outperforms SVM considering both computing efficiency and classifying results.

I. INTRODUCTION

II. THE VOCABULARY CONSTRUCTION: WORD PREPROCESSING

We begin our work by preprocessing the available tweets such that we can define our vocabulary. However the words in the dataset are not easily separable by whitespaces due to following reasons:

Separators: Words can be separated by multiple characters including whitespace for words, period for sentence ending, comma for clause endings, dash for connected words and : or ; to for beginning independent clauses. The problem is that the last two characters can be used as emojis.

Word contractions: word contractions can be viewed as complete new token, but in the end it is just combination of two words. Common word contractions are related to to be's and modal verbs.

Special words: Due to freedom of writing tweets, we can observe multiple emphasizes on words including hashtags, and repeated characters like (hey to heyyyy). These words must have a special treatment but for vocabulary building these variations were eliminated.

Stop words: The full list of stop words can be found here <https://kb.yoast.com/kb/list-stop-words/>. In our case, we are assuming pronouns like "the" can represent some meaningful information since it emphasizes following nouns.

Word variations: In english word can take multiple forms like plural form, verb tenses, incorrect spelling etc. Hence, simple word separation is not enough. And also in english, people use "'s" or "s'" to represent possessions REPHRASE THIS!!

Numbers: we assumed that numbers usually conveys factual informations which is not helpful to identify the opinion of a person. Moreover, we need to treat numbers different from words. Thus, we have completely removed every numbers.

In order to overcome the problems mentioned above, we created a customized vocabulary building algorithm with the following procedure:

First we tokenized the text using white space, comma, period, new line. We excluded : and ; since they are maybe part of emojis. Following, for each token we look for word contractions. In our case, we only considered hashtags, common contraction list to separate tokens which contains multiple words. Moreover, we have removed possessions from each token. After this, we address the issue of word variation by shrinking consecutive repeated characters, e.g. we replaced "foooooot" by "foot". Finally, we used their stems to build our vocabulary.

This preprocessing lead to an increase of the tokens in 80,000. Moreover, the total number of unique words in decreased significantly. Indeed, we have successfully obtained almost 32,000 unique words. This means that we ended up with just 32% of all the tokens produced after splitting. (Clarify)

Now let's look at the distribution of each words. The graph 1 shows the distribution of the words of our final vocabulary. As expected, it shows similar relationship as Zipf's law, but note that the number of words with only 1 occurrence in the entire text is important. Indeed, almost 50% of the vocabulary takes only 1.2% of the text which implies that it is not worth keeping the 50% of the words for simplicity.

Finally, in order to increase efficiency of the information contained in our final co-occurrence matrix we apply term frequency- inverse document frequency (tf-idf) feature. This factor gives more importance to words that are repeated in a tweet but not highly recurrent in the whole corpora.

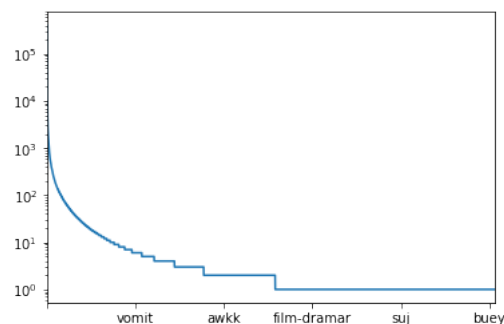


Fig. 1. Word Distribution

III. THE WORD SPACE: EMBEDDING MATRIX

In order to obtain a numerical representation of the words w_i contained in the data set as $\mathbf{w}_i \in \mathbb{R}^K$ we used GloVe model.

This model retrieves the numerical representation of the words that is closest to natural logarithm of the observed co-occurrence value x_{ij} . Indeed, Pennington et al. (2014) propose to obtain the real valued vector by minimizing a weighted sum of squared errors. Where the error is the difference between the log of co-occurrence value and the predicted one given by $\mathbf{w}_i' \mathbf{w}_j$. Thus, the model minimizes the following cost function:

$$L(\mathbf{w}_n, \mathbf{w}_c) = \sum_{j=1}^N \sum_{i=1}^D f(x_{ij}) (\log(x_{ij}) - \mathbf{w}_i' \mathbf{w}_j)^2$$

with:

$$f(x_{ij}) = \min(1, x_{ij}/x_{max})^{3/4}$$

IV. THE TWEET SPACE: FEATURE RETRIEVAL

In order to obtain a numerical representation of the tweet space we can either use bag of words feature or combine individual word features appropriately.

The bag of words is a way to represent a text or sentence into vector where each feature represents one word in the vocabulary. And thus, by calculating term frequency and inverse document frequencies of each words in tweet, we can represent any given document. This method is easy to implement but needs huge amount of data in order to be effective, since number of features can be 50000 to 1 million.

On the other hand, the most straightforward and widely used method for combining word features is taking only mean value. But two challenges of creating tweet space are loss of information related to word sequence and their emphasis. Specially most tweets has various ways of emphasizing giving word, including hash-tagging, repeating characters, emoticons etc. Hence, we also extracted following 4 features indicating how important each word is.

- 1) Hash-tagged?: boolean vector indicating each word of tweet is hash-tagged or not
- 2) Parts of speech score: The parts of speech is important linguistic characteristic to evaluate how objective or subjective the word is. According to the (Alexander Pak), superlatives and adjectives are tend to be more subjective and thus it has more impact on evaluating writer's opinion. By using their results, we have obtained each tag's score.
- 3) Negations: The negations words, including not, neither, none has important characteristics, which can change meaning of the text complete opposite. Thus, we created boolean matrix indicating each word is negation or not
- 4) Emphasize: Many twitters use repeated characters to express their emotion. So we counted number of repeated characters in each word to represent this feature.

Once we found the features, we combined total weight of each word feature by using following equation:

!!MONIKA!! equation in here $\text{weight} = a * \text{hash-tagged} + b * \text{pos} + c * \text{negation} + d * \text{emphasize}$

To find the a,b,c,d parameters we used grid-search algorithm which maximizes separability of negative and positive tweets' features, created from tf-idf of words.

V. THE CLASSIFICATION MODEL

After obtaining the tweet space i.e. the features that represent the data set of tweets, we trained the classification model. For this aim, we used two models: 1. Random Forest and 2. SVM.

The first model is random forests, this is a method based in an ensemble approach composed of a set of decision trees. At each node, the variables used to divide the space of the independent variables are randomly selected and used to create the decision tree (Breiman (2001)).

The second classification algorithm used is SVM. In this method, we look to maximize the geometric margin between positive and negative tweets subject to the constraint that the classified vectors must lie outside this margin¹. This optimization problem is equivalent to the following one for each training sample:

$$\begin{aligned} \min_w ||w||^2 \\ \text{s.t. } y_i(x_i'w + b) \geq 1 \end{aligned}$$

Now, setting the dual problem we can obtain the support vectors which are few training observations that lie on the margin.

VI. THE DATA

Our dataset is a collection of Twitter conversations (tweets), that is divided into two different sentiments such as positive and negative messages. Each sentiments has 100000 tweets. Before the dataset analysis step, the redundant tweets needed to be deleted. We used the Notepad++ tool plugins for that purpose which gave us unique tweets. As the result, there are 91088 tweets in the negative and 90233 tweets in the positive datasets.

The analysis starts with comparing the usage of tags and shared links in terms of people's behavior of using them in positive and negative tweets respectively. After that, we computed the average use of tag and link in two datasets. We created the following plot from the result.

First of all, we can see from the plot that people use tags more than url. Furthermore, as shown in the plot, people tend to use tags more in positive messages than negative. This gives an observation that people like to share their happy moments with others by mentioning them or giving them credits. On the other hand, the usage of URL link is considerably lower than the usage of tags in the positive dataset.

After the above analysis, the links and tags needed to be deleted from the dataset because first we obtained the necessary results, and second they may be miscomputed as adjective or noun tokens. Again, we used the Notepad++ tool plugins for this purpose because jupyter notebook was

¹AndrewNg, Support Vector Machines

Secondly, we wanted to find out part-of-speech type of words that plays an important role in two different datasets. We counted every words occurrences in the datasets. In order to do that, punctuations needed to be deleted by replacing with empty space. Also, all uppercase letters are converted into lowercase to make them identical so that they would be counted as the same word. After counting word occurrences, negative dataset's words are subtracted from positive dataset's words, which shows the difference between two datasets words. The following the plot illustrates the result.

Adjectives play an important role in distinguishing positive and negative tweets since they are used much more, comparing to nouns and verbs, in the tweets.

Category	Negative data set	Positive data set
tags	0.48	0.83
urls	0.30	0.06

	positive tweets	negative tweets
min	0	0
max	46	37
25%	11.76	9.934
75%	17.23	14.37
mean	17.7	14.54
std	15.3	12.24

In order to analyze and evaluate our proposed pre-processing and feature processing methods, we have created 4 main pipelines.

- From the graph, our prediction model has increased by almost 20 percent. And also, note that even though we have lost the tweet information by generalizing the mean in pipeline 3, the result is almost same as that of RF with bag of representation. However, in both cases we have lost word order information. This implies, there is further possibility of increasing the performance by using different model which uses sequential information, including Hidden Markov Model, Convolutional Neural Network, Ngram models etc. And moreover, according

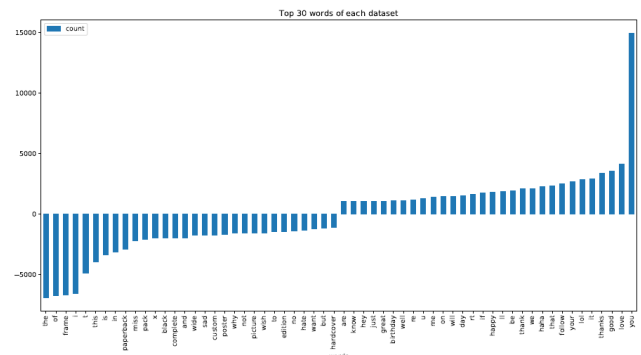


Fig. 3. Top 30 words of each dataset

to the section 2's result many words in the vocabulary are not recognizable. Thus, there is further possibility of improvement using string matching or spell checking algorithms. But we couldn't use it, due to computational limit. In general, Random Forest achieved higher result than SVM in very low training time. And also for parameter optimization increased size of estimators in RF doesn't result over-fitting, due to its random behavior.

VIII. SUMMARY

REFERENCES

Alexander Pak, P. P.

. Twitter as a corpus for sentiment analysis and opinion mining, universite de paris-sud, laboratoire limsi-cnrs, batiment 508, f-91405 orsay cedex, france.

Breiman, L.

2001. Random forests. *Machine learning*, 45(1):5–32.

Pennington, J., R. Socher, and C. Manning

2014. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, Pp. 1532–1543.

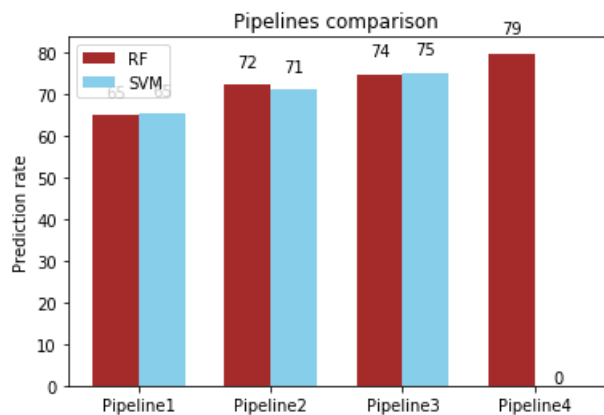


Fig. 4. Results