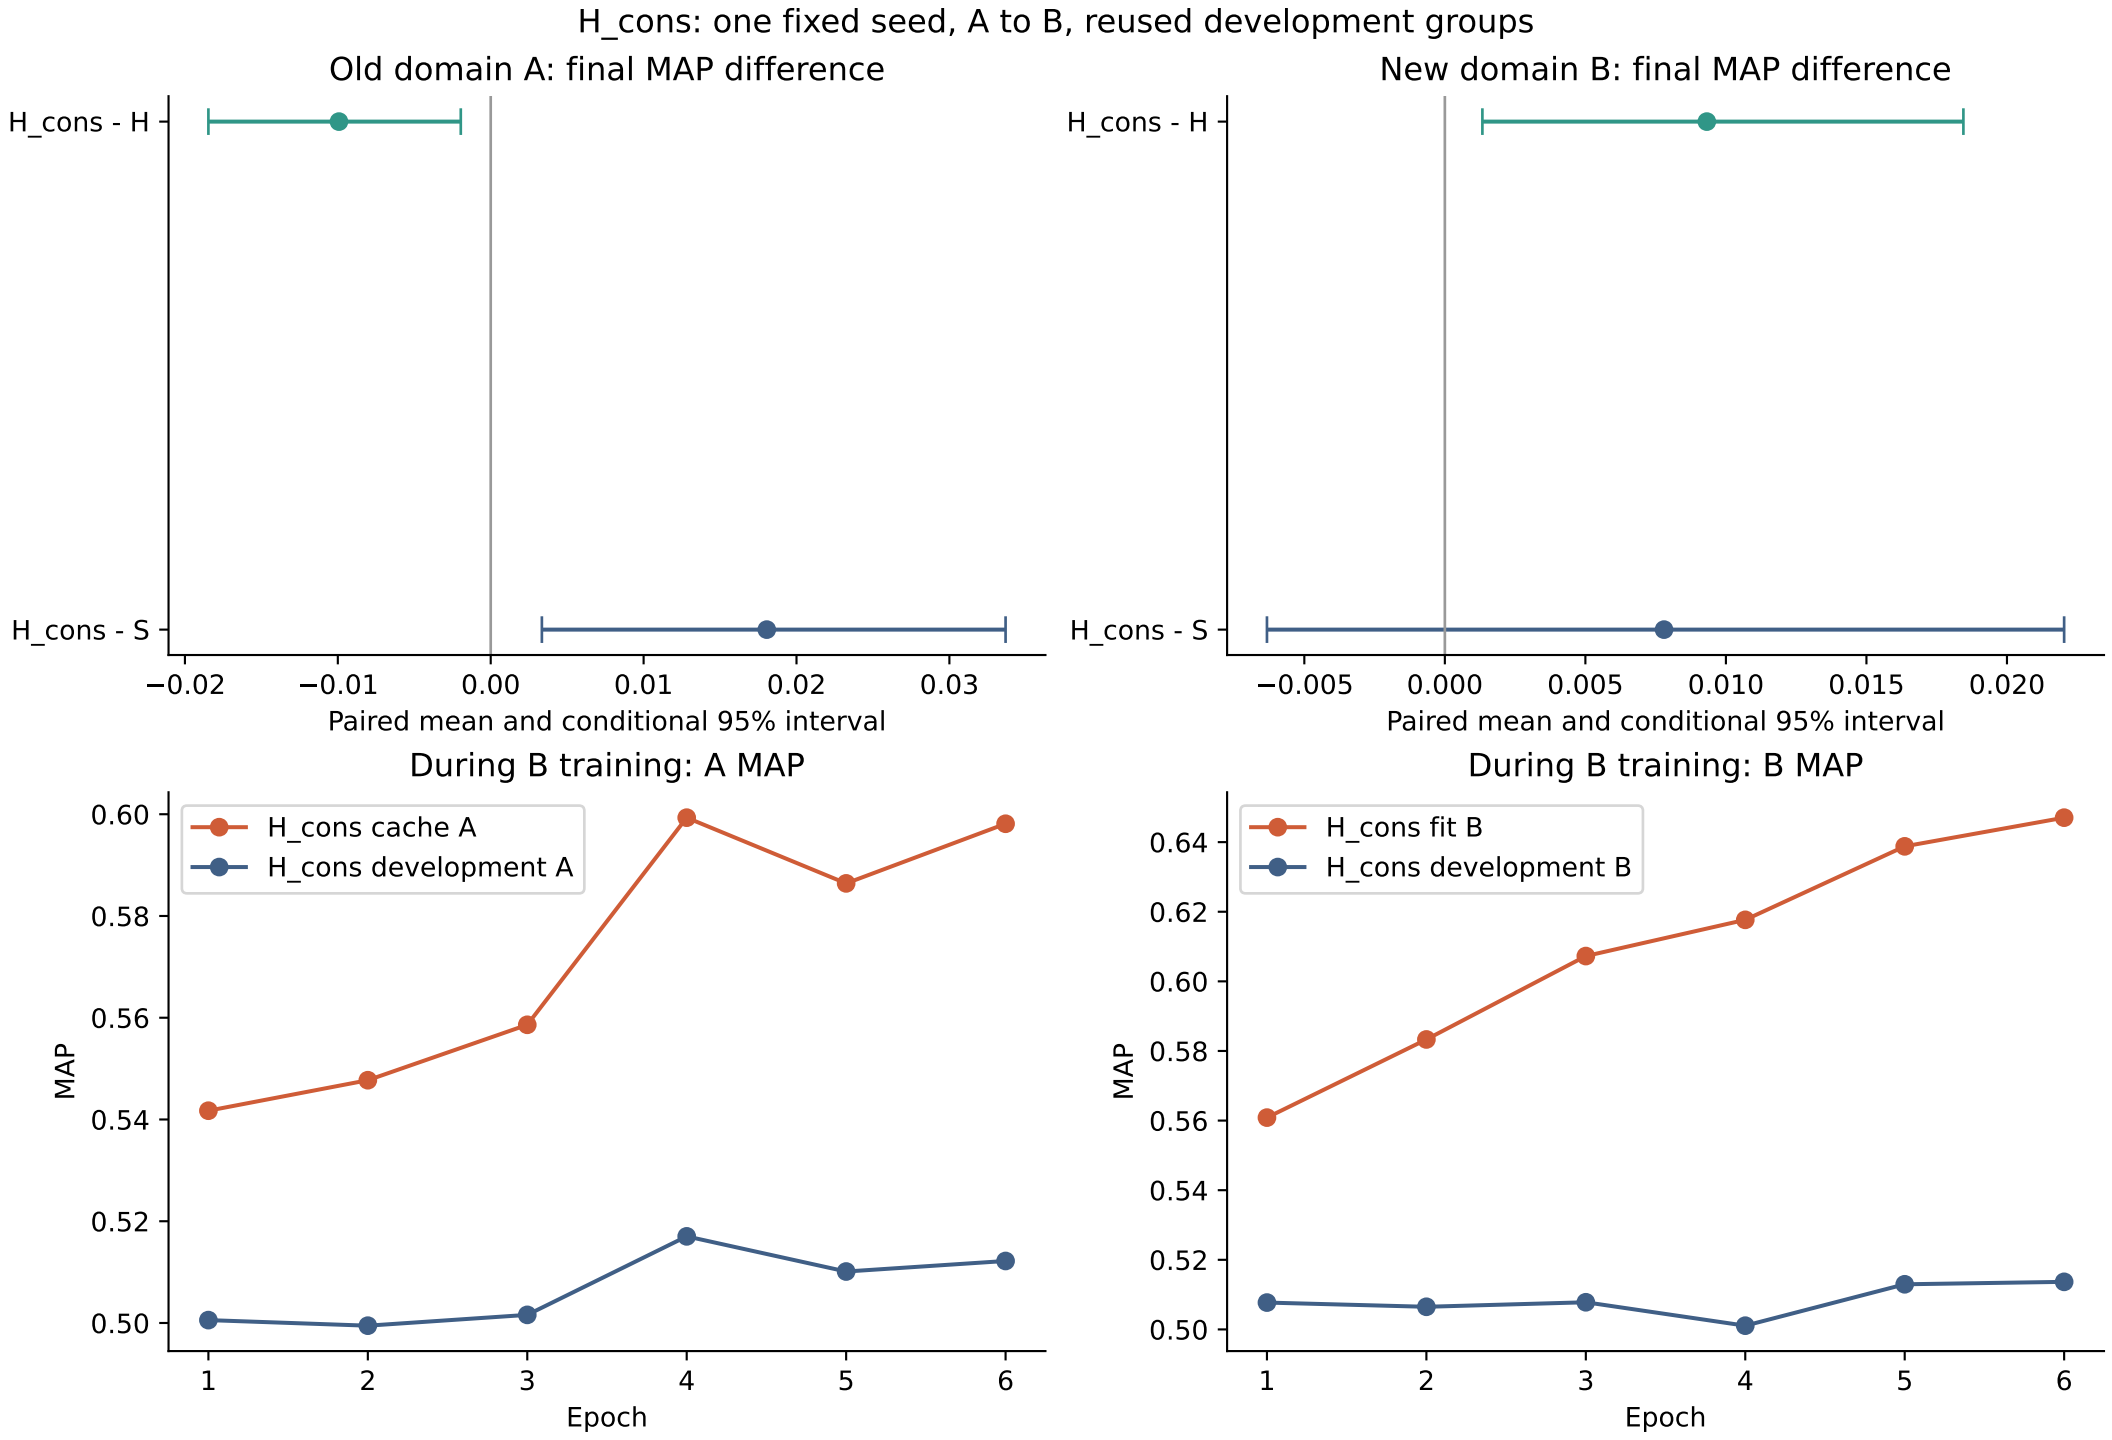
H_cons: one fixed seed, A to B, reused development groups
Old domain A: final MAP difference
H_cons - H
H_cons - S
−0.02
−0.01
0.00
0.01
0.02
0.03
Paired mean and conditional 95% interval
New domain B: final MAP difference
H_cons - H
H_cons - S
−0.005
0.000
0.005
0.010
0.015
0.020
Paired mean and conditional 95% interval
During B training: A MAP
H_cons cache A
H_cons development A
MAP
0.60
0.58
0.56
0.54
0.52
0.50
1
2
3
4
5
6
Epoch
During B training: B MAP
H_cons fit B
H_cons development B
MAP
0.64
0.62
0.60
0.58
0.56
0.54
0.52
0.50
1
2
3
4
5
6
Epoch