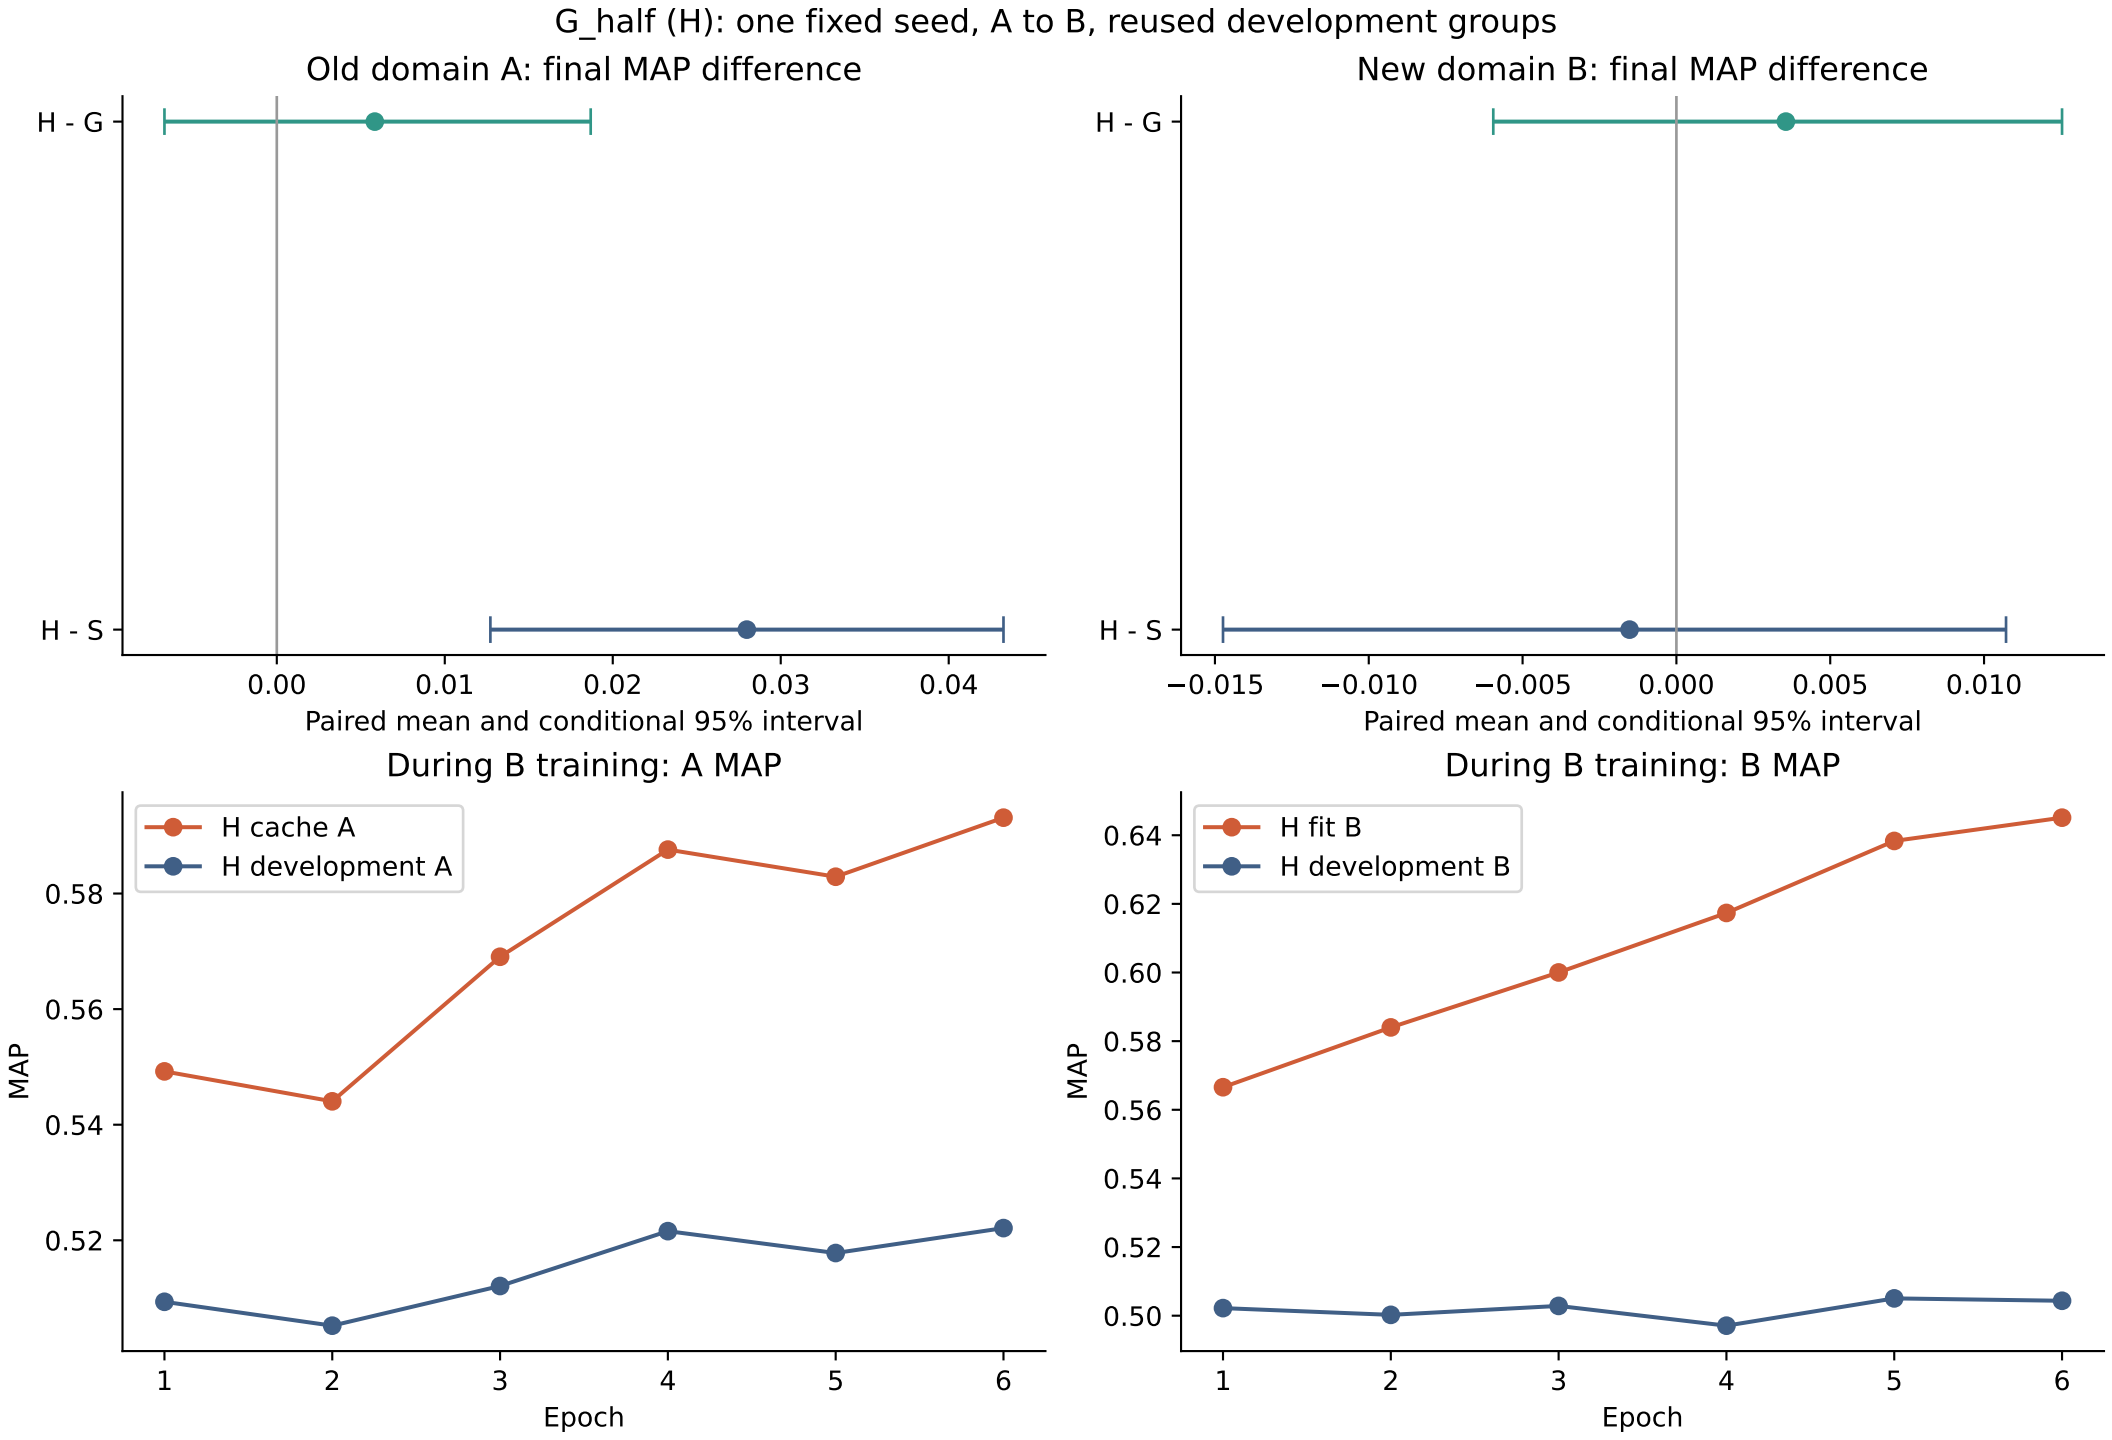
G_half (H): one fixed seed, A to B, reused development groups
Old domain A: final MAP difference
H - G
H - S
0.00
0.01
0.02
0.03
0.04
Paired mean and conditional 95% interval
New domain B: final MAP difference
H - G
H - S
−0.015
−0.010
−0.005
0.000
0.005
0.010
Paired mean and conditional 95% interval
During B training: A MAP
H cache A
H development A
MAP
0.52
0.54
0.56
0.58
1
2
3
4
5
6
Epoch
During B training: B MAP
H fit B
H development B
MAP
0.50
0.52
0.54
0.56
0.58
0.60
0.62
0.64
1
2
3
4
5
6
Epoch