

Lab 4: AWS Security and Server Infrastructure

A demo of the basic setup of this lab is at: https://youtu.be/rhf4_1E_wAU

A Outline

In previous labs we have set up a range of architectures with VMWare vSphere. This is a private cloud environment and creates infrastructure-as-a-service. Increasingly, we use the public cloud to build our information systems, and which reduces the cost in the investment in data centre costs, while providing the opportunity to quickly scale our server, network and data infrastructure. It is generally as pay-as-you-go model, and where we pay for CPU time, network bandwidth and data costs. The most popular public cloud provider is AWS (Amazon Web Services), and which provides EC2 (for compute), S3 (for data buckets), RDS (for databases) and AWS Network Firewall (for firewalls). Some of these services are outlined in Figure 1.

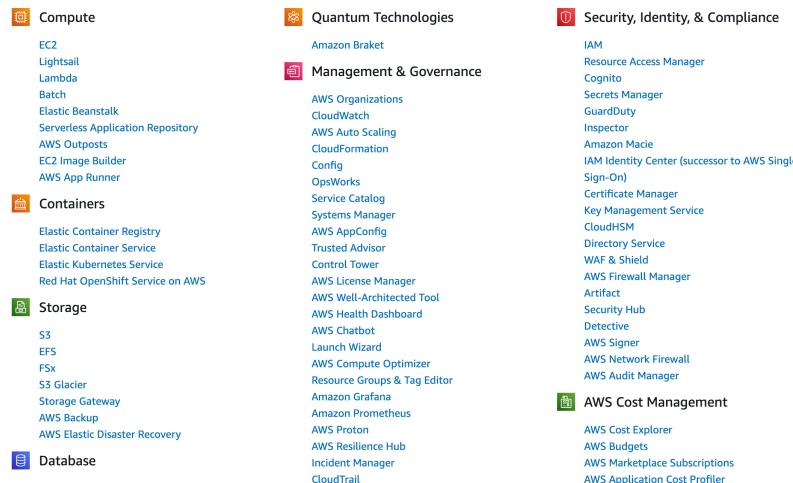


Figure 1: AWS Services

B Enabling your lab

You should have an AWS Academy login, so go to: <https://awsacademy.instructure.com/> and log into the system and select **AWS Academy Learner Lab** (Figure 2).

AWS Academy Learner Lab - Foundation Services [28224]



This is the Edinburgh Napier University AWS Academy Learner Lab for CSN09112, and which has \$100 of credit for you to learn AWS Services. If you exceed your credit, you will lose your environment, so remember to switch your instances off when you are not using them. The lab session is four hours, but you can restart the lab again at any time. All EC2 instances will be shut off after the four hours are up. Do not end the lab, until we have finished with the module. Some resources are:

- Introduction to Cloud Computing: [here](#)
- A demo of setting up EC2 instances is [here](#)

Click [Modules](#) to start the course.

Figure 2: AWS Academy Learner Lab

Next, select “Modules”, and then “Learner Lab - Foundational Services”, and should have the lab environment (Figure 3).

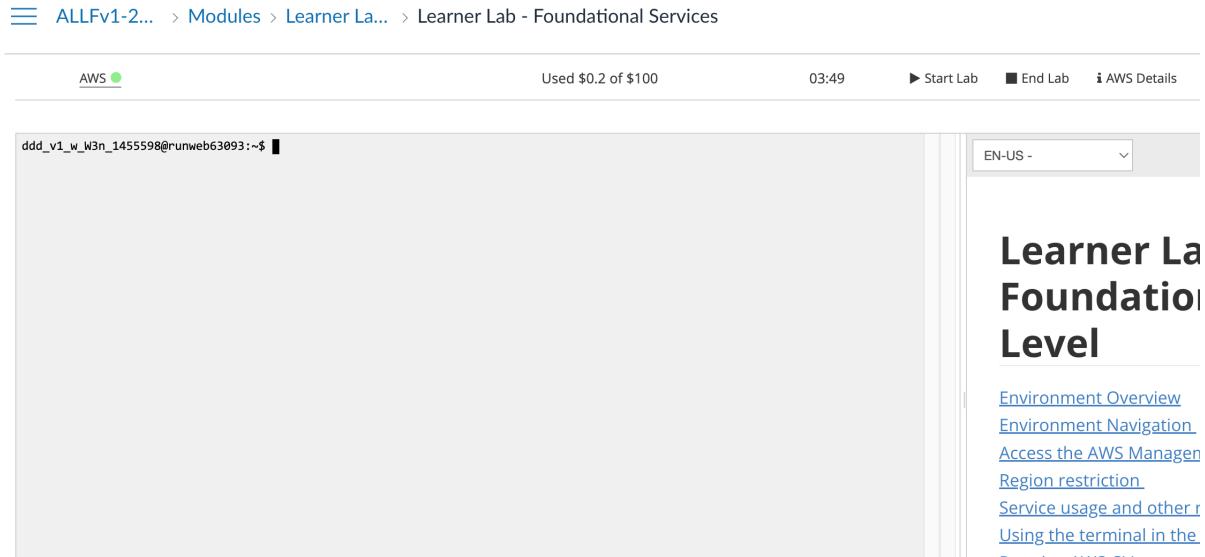


Figure 3: AWS Academy Learner Lab environment

Your unique account will have been generated, and you can access it with **aws_access_key_id** and **aws_secret_access_key** (from AWS details).

In the console you can interact with your AWS though the console (as you are already logged into AWS). Now, press the “Start Lab” button, and wait for the AWS light to go green. Once, green, you can click on it, and open up your AWS Management console. After this, just select EC2, and you should see your EC2 environment.

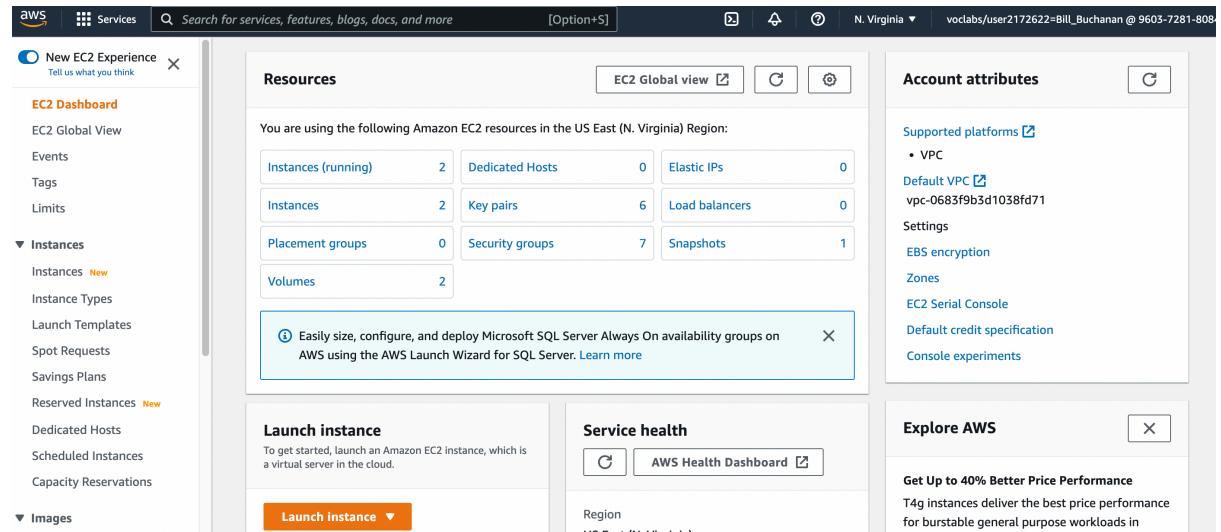


Figure 4: AWS Management Console (EC2)

C Creating and Securing a Linux Server

We will now create a Linux Server, and which should be accessible from the Internet. For this select “Launch Instance”, and then give it a name (such as “My Linux Server”) and select the Amazon Linux instance for the AMI (Amazon Machine Instance) – as shown in Figure 5.

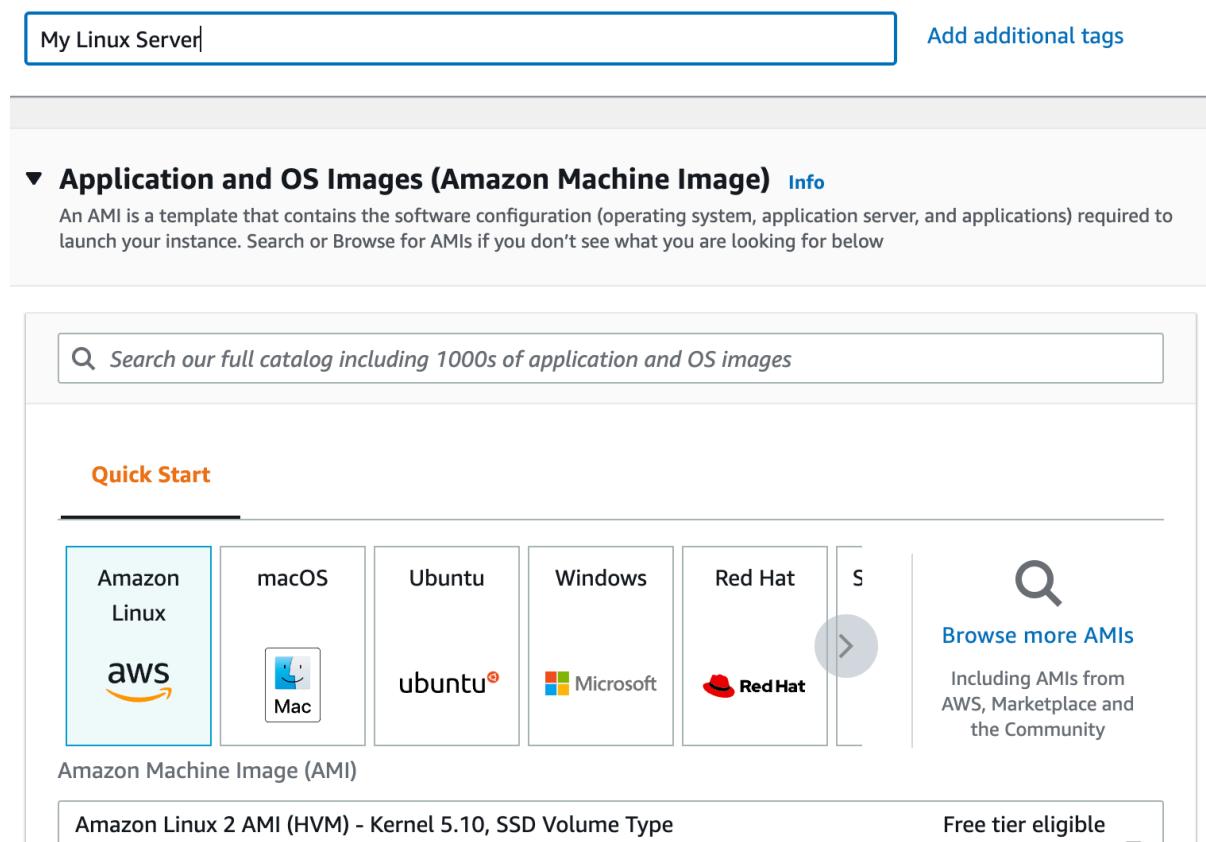


Figure 5: Creating Amazon Linux instance

Now select **t2.micro** for the instance type.

How many vCPUs will the instance have?

How much memory will it have?

How much will it cost per day to run?

If you selected, t2.medium, how much would it cost per day?

If you selected, t2.large, how much would it cost per day?

Now create a new key pair and save it to your local drive. This file contains your private key, and which you will need to connect to your instance. Accept all the other defaults.

Observe the **firewall group** that will be applied.

Which firewall ports are open on the instance?

What do you think is the main issue with this firewall setting?

How would you change it, once you have created the instance?

Observe the disk storage setting for the instance.

What type of disk will be used? [HDD/SSD]

What do you think is the advantage of using SSD?

For disk storage, what is the default size of the disk that you will create?

What is the maximum storage size for a free tier storage of the AMI instance we are creating?

C.1 Creating the instance

Go ahead and create the instance. Then go back to the AWS Management Console, and find your instance. Wait for it to set its state to running.

Now we will connect to it. For this we need to create an SSH connection and use the private key we have generated. The public key will be stored on the instance and will authenticate our access. We do not need a username or password to access the instance, as this is often insecure. Our PEM file will give us access (or you can use Putty for the connection).

Now, we will examine the details of our instance (Figure 6). On the instance summary, determine the following:

The public IP address:

The private IP address:

The instance type:

The public IPv4 DNS:

From your local host, can you ping the public IP address? [Yes/No]

Why can't you successfully ping your instance?

Which region of the world is your instance running in?

C.2 Enabling ICMP on firewall

Now, we will enable ICMP on the instance. First click on the Security tab of the instance summary, and then on the security group.

What is the firewall rule that is applied to the instance?

[SSH/Telnet/FTP/HTTP/HTTPs] for [0.0.0.0/0 or 0.0.0.0/8 or 0.0.0.0/16 or 0.0.0.0/32]

What does 0.0.0.0/0 represent?

Now go ahead and add an ICMP rule for all hosts (Figure 7).

Can you now successfully ping your instance? [Yes/No]

Now, lock your ICMP rule down to just your IP address (you need to use a /32 address for this). Can you still successfully ping the instance? [Yes/No]

Ask your neighbour or one of the lab tutors to ping your instance. Can they successfully ping it? [Yes/No]

What is the advantage of applying the firewall in AWS, rather than in the instance?

| Instance summary for i-07b0512e24e263766 (MyLinuxServer) | | |
|--|---|---|
| Updated less than a minute ago | | |
| Actions | Info | Connect |
| Instance ID i-07b0512e24e263766 (MyLinuxServer) | Public IPv4 address 52.90.3.121 open address | Private IPv4 addresses 172.31.16.186 |
| IPv6 address - | Instance state Pending | Public IPv4 DNS ec2-52-90-3-121.compute-1.amazonaws.com open address |
| Hostname type IP name: ip-172-31-16-186.ec2.internal | Private IP DNS name (IPv4 only) ip-172-31-16-186.ec2.internal | Elastic IP addresses - |
| Answer private resource DNS name IPv4 (A) | Instance type t2.micro | AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more |
| Auto-assigned IP address 52.90.3.121 [Public IP] | VPC ID vpc-0683f9b3d1038fd71 | Auto Scaling Group name - |
| IAM Role - | Subnet ID subnet-00bdb3e7927760f46 | |

Figure 6: Details of instance

The screenshot shows the AWS Management Console interface for managing security group inbound rules. The top navigation bar has tabs for 'Inbound rules', 'Outbound rules', and 'Tags'. Below the tabs, there's a message: 'You can now check network connectivity with Reachability Analyzer' with a 'Run Reachability Analyzer' button. The main area is titled 'Inbound rules (2)' and includes a search bar 'Filter security group rules'. A table lists the rules:

| Name | Security group rule... | IP version | Type | Protocol | Port |
|------|------------------------|------------|-----------------|----------|------|
| - | sgr-0ed01ab1ba175fe5b | IPv4 | SSH | TCP | 22 |
| - | sgr-04b533407d759a... | IPv4 | All ICMP - IPv4 | ICMP | All |

Figure 7: Enable ICMP

C.3 Accessing your instance

Now we will connect to our instance. For this you need SSH (such as provided by OpenSSH). This may be installed on the host you are using (such as in vSoC 2), or from Apps Anywhere. Once you have SSH, press **Connect** on the summary page, and you should then have tabs for **Connect to instance** (Figure 8). Next select the SSH client tab, and you will see the details of connecting to your instance with SSH.

The screenshot shows the 'Connect to instance' page for an EC2 instance with the ID i-07b0512e24e263766 (MyLinuxServer). The page has tabs: 'EC2 Instance Connect', 'Session Manager', 'SSH client' (which is selected and highlighted in orange), and 'EC2 serial console'. The main content area shows the instance ID and a list of connection options:

- Instance ID: i-07b0512e24e263766 (MyLinuxServer)
- 1. Open an SSH client.
- 2. Locate your private key file. The key used to launch this instance is mynewkeypair.pem
- 3. Run this command, if necessary, to ensure your key is not publicly viewable.
 - chmod 400 mynewkeypair.pem
- 4. Connect to your instance using its Public DNS:
 - ec2-52-90-3-121.compute-1.amazonaws.com

Example:

- ssh -i "mynewkeypair.pem" ec2-user@ec2-52-90-3-121.compute-1.amazonaws.com

Figure 8: Connect to instance

Now find your PEM file on your local machine (from the command line), and protect it with:
`chmod 400 myfile.pem`

What protection does this put on your private key?

Next, use the SSH connection with the name of your PEM file and with the DNS (or IP address) for your instance. For example, in the case in Figure 8, we have:

```
ssh -i "mynewkeypair.pem" ec2-user@ec2-52-90-3-121.compute-1.amazonaws.com
```

What is the name of the user that logs in?

An example of connecting is:

```
% ssh -i "mynewkeypair.pem" ec2-user@ec2-52-90-3-121.compute-1.amazonaws.com
The authenticity of host 'ec2-52-90-3-121.compute-1.amazonaws.com (52.90.3.121)' can't be established.
ED25519 key fingerprint is SHA256:/c5UOK6gprKL19xCptNQ1brb9MpYR5wEeqhD/6t+/wk.
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:48: ec2-3-90-189-201.compute-1.amazonaws.com
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-52-90-3-121.compute-1.amazonaws.com' (ED25519) to the list of known hosts.
Last login: Fri Sep 30 17:07:00 2022 from ec2-18-206-107-27.compute-1.amazonaws.com
[ec2-user@ip-172-31-16-186 ~]$
```

_ _ | (_ | _ /)
_ _ | \ _ | _ | Amazon Linux 2 AMI

https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-172-31-16-186 ~]\$

Have you managed to connect? [Yes/No]

By using “ip addr show” or “ifconfig” in your instance, what is the private IP address of it?

Can you ping 8.8.8.8 from your instance? [Yes/No]

Is there a folder named .ssh? [Yes/No]

What do you think is the purpose of the file contained in .ssh?

Now create a folder in the top level named “mytestfolder”, and put a new file in there named “mytext.txt” (and put some text in this file).

Now go to the EC2 Instance Connect (Figure 8), and press on the Connect button. You should now get a console terminal in the browser.

From your console (Figure 9), verify that your file has been created. Has it been created in the instance? [Yes/No]

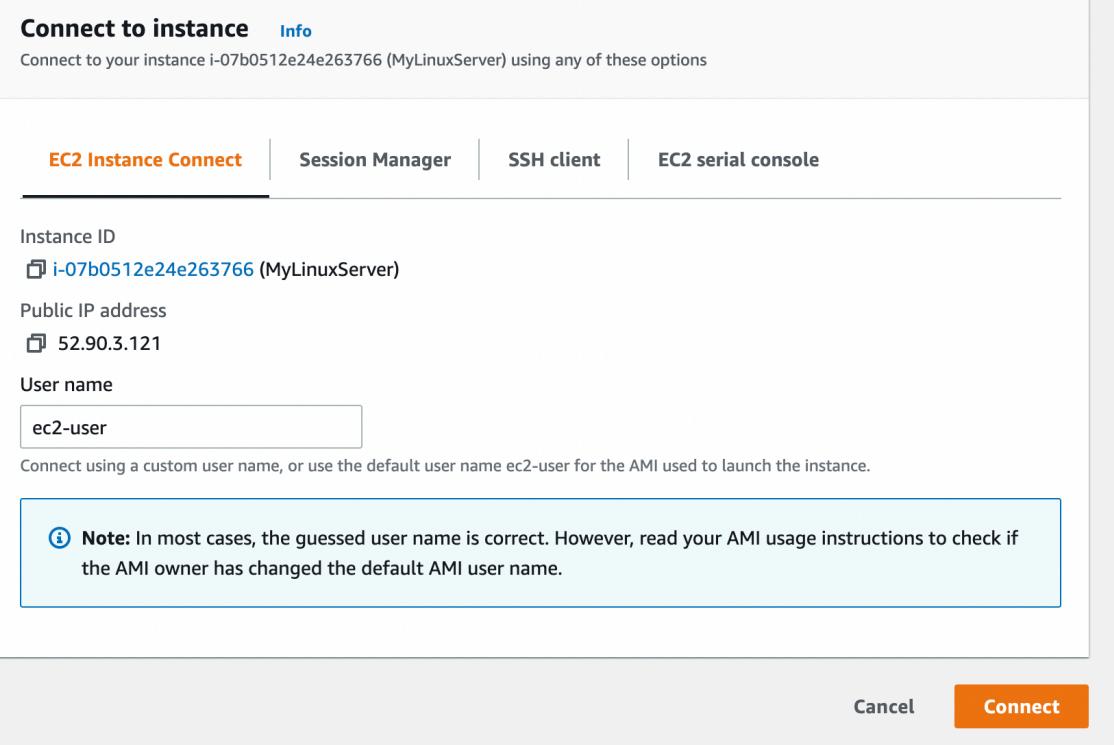


Figure 9: EC2 Instance Connect

The screenshot shows a terminal window titled 'Services' with the AWS logo. The search bar says 'Search for services, features, blogs, docs, and more [Option+S]'. The terminal output shows a login session on an Amazon Linux 2 AMI instance. The user 'ec2-user' is logged in from the IP address 172-31-16-186. The user navigates to a directory named 'mytestfolder', lists its contents, and reads a file named 'mytext.txt' which contains the word 'Test'.

```

Last login: Sun Oct  2 11:39:05 2022 from host86-131-160-187.range86-131.btcentralplus.com
[ec2-user@ip-172-31-16-186 ~]$ cd mytestfolder/
[ec2-user@ip-172-31-16-186 mytestfolder]$ ls
mytext.txt
[ec2-user@ip-172-31-16-186 mytestfolder]$ cat mytext.txt
Test
[ec2-user@ip-172-31-16-186 mytestfolder]$ 
```

Figure 10: EC2 Instance Connect terminal

Now examine the running services on the instance with:

```
$ netstat -i | grep tcp
$ netstat -i | grep udp
```

Which of the main services are running:

C.4 Installing a Web server

Now we will install a Web server on the instance with:

```
sudo yum update -y
sudo yum install -y httpd.x86_64
sudo systemctl start httpd.service
sudo systemctl enable httpd.service
```

Next open up a browser on your computer and access your instance for Web access.

Can you connect to it? [Yes/No]

Why can't you connect to it?

Now enable a firewall rule on Port 80 and Port 443 and allow access for Web traffic (see Figure 10).

| Inbound rules Info | Type Info | Protocol Info | Port range Info | Source Info | Description - optional Info | |
|------------------------------------|---------------------------|-------------------------------|---------------------------------|-----------------------------|---|------------------------|
| sgr-0ed01ab1ba175fe5b | SSH | TCP | 22 | Custom ▾ | <input type="text"/> 0.0.0.0/0 X | Delete |
| sgr-04b533407d759a286 | All ICMP - IPv4 | ICMP | All | Anywh... ▾ | <input type="text"/> 0.0.0.0/0 X | Delete |
| - | HTTPS | TCP | 443 | Anywh... ▾ | <input type="text"/> All access to Web server X | Delete |
| - | HTTP | TCP | 80 | Anywh... ▾ | <input type="text"/> All access to Web server X | Delete |

Figure 11: Enable HTTP and HTTPS rules

Can you now connect to your Web site? [Yes/No] (see Figure 11)

This screenshot shows a web browser window with the URL `52.90.3.121`. The page title is "Test Page". The content of the page is a standard Apache test page message: "This page is used to test the proper operation of the Apache HTTP server after it has been installed. If you can read this page, it means that the Apache HTTP server installed at this site is working properly." Below this message, there are two sections: "If you are a member of the general public:" and "If you are the website administrator:". The "general public" section states that the page indicates the website is experiencing problems or undergoing maintenance. The "administrator" section provides instructions for adding content to the directory `/var/www/html/` and directs users to the file `/etc/httpd/conf.d/welcome.conf` for preventing misuse. A "Powered by APACHE 2.4" logo is visible at the bottom right of the page.

Figure 12: Sample access to Web site

Now go into the `/var/www/html` folder, and create a file named “index.html”, and add:

```
<h1>Main web site</h1>
```

```
<p>Hello to you</p>
```

And then save the file.

Has it changed the welcome? [Yes/No]

C.6 Auditing

The main logging output is in the /var/log folder. Go into this folder and observe some of the files in there. Identify the contents of the following files:

What are the likely contents of the “secure” file?

What are the likely contents of the “boot.log” file?

List the log/httpd/access_log file. What are its contents? Can you identify your browser access? (see Figure 12). Which browser type accessed your Web server?

Now try with another browser type (such as Firefox or Chrome) and re-examine the log/httpd/access_log file. Did it detect the new browser type?

Now access a file that does not exist in your site (such as http://AWSIP/test.htm). Now re-examine the log/httpd/access_log file. What is the status code returned for the access?

```
e/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:11:56:24 +0000] "GET /icons/apache_pb2.gif HTTP/1.1" 34 "http://52.90.3.121/" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:11:56:24 +0000] "GET /favicon.ico HTTP/1.1" 404 "http://52.90.3.121/" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:11:58:16 +0000] "-" 408 "-" "-"
187 - - [02/Oct/2022:12:12:22 +0000] "GET / HTTP/1.1" 200 13 "-" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:12:19:53 +0000] "GET / HTTP/1.1" 200 13 "-" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:12:19:53 +0000] "GET /favicon.ico HTTP/1.1" 404 "http://52.90.3.121/" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:12:19:54 +0000] "GET / HTTP/1.1" 304 "-" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
187 - - [02/Oct/2022:12:19:56 +0000] "GET / HTTP/1.1" 304 "-" "Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/105.0.0.0 Safari/537.36"
```

Figure 13: Sample list of log/httpd/access_log

C.7 Adding a new user

The ec2_user can be used to connect back into the server using access authenticated with the private key. We will now create a new user named “napier”, and which can connect to the instance with SSH. For this we use adduser and passwd on the Linux instance:

```
[ec2-user@ip-172-31-16-186 ~]$ sudo adduser napier
[ec2-user@ip-172-31-16-186 ~]$ sudo passwd napier
Changing password for user napier.
New password: <yourpass>
Retype new password: <yourpass>
passwd: all authentication tokens updated successfully.
```

Now we will add the new user to the login. For this, we use:

```
[ec2-user@ip-172-31-16-186 .ssh]$ sudo nano /etc/ssh/sshd_config
Add line of (see Figure 13):
AllowUsers ec2-user napier
Change the following to “yes” (see Figure 14):
PasswordAuthentication yes
```

Now restart the SSH service with:

```
[ec2-user@ip-172-31-16-186 .ssh]$ sudo systemctl restart sshd
```

Can you now connect to your instance with the new user and password:

```
ssh    napier@54.209.145.85
```

Can you connect with the new user? [Yes/No]

```
#      $OpenBSD: sshd_config,v 1.100 2016/08/15 12:32:04 naddy Exp $
AllowUsers ec2-user napier
# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/local/bin:/usr/bin

# The strategy used for options in the default sshd_config shipped with
```

Figure 14: Accessing instances

```
# To disable tunneled clear text passwords, change to no here!
#PasswordAuthentication yes
#PermitEmptyPasswords no
PasswordAuthentication yes

# Change to no to disable s/key passwords
#ChallengeResponseAuthentication yes
ChallengeResponseAuthentication no
```

Figure 15: Accessing instances

C.8 Accessing from AWS prompt

We can also access our instance from the AWS terminal prompt. For this return to your AWS Academy console, and enter the command (Figure 15):

```
$ aws ec2 describe-instances
```

From the results, can you identify the following.

Instance type:

Public IP address:

Private IP address:

State:

```
ddd_v1_w_W3n_1455598@runweb63093:~$ aws ec2 describe-instances
{
  "Reservations": [
    {
      "Groups": [],
      "Instances": [
        {
          "AmiLaunchIndex": 0,
          "ImageId": "ami-026b57f3c383c2eec",
          "InstanceId": "i-07b0512e24e263766",
          "InstanceType": "t2.micro",
          "KeyName": "mynewkeypair",
          "LaunchTime": "2022-10-02T11:14:16+00:00",
          "Monitoring": {
            "State": "disabled"
          },
          "Placement": {
            "AvailabilityZone": "us-east-1b",
            "GroupName": "",
            "Tenancy": "default"
          },
          "PrivateDnsName": "ip-172-31-16-186.ec2.internal",
          "PrivateIpAddress": "172.31.16.186",
          "ProductCodes": [],
          "PublicDnsName": "ec2-52-90-3-121.compute-1.amazonaws.com",
          "PublicIpAddress": "52.90.3.121",
          "State": {
            "Code": 16,
            "Name": "running"
          },
          "StateTransitionReason": "",
          "SubnetId": "subnet-00bdb3e7927760f46",
          "VpcId": "vpc-0683f9b3d1038fd71",
          "Architecture": "x86_64",
        }
      ]
    }
  ]
}
```

EN-US -

Learn
Four
Level

[Environment](#)
[Environment](#)
[Access the](#)
[Region res](#)
[Service us](#)
[Using the t](#)
[Running A](#)
[Using the A](#)
[Preserving](#)
[Accessing J](#)

Figure 16: Accessing instances

Now try we will stop our instance using an AWS EC2 command. Run the following with your instance ID (see Figure 17):

```
aws ec2 stop-instances --instance-ids [My-instance-ID]
```

From the AWS Management Console, has your instance stopped? [Yes/No]

```
ddd_v1_w_W3n_1455598@runweb62964:~$ aws ec2 stop-instances --instance-ids i-07b0512e24e263766
{
  "StoppingInstances": [
    {
      "CurrentState": {
        "Code": 64,
        "Name": "stopping"
      },
      "InstanceId": "i-07b0512e24e263766",
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
ddd_v1_w_W3n_1455598@runweb62964:~$ █
```

Figure 17: Stopping an instance

Now we will restart the instance, with:

```
aws ec2 start-instances --instance-ids [My-instance-ID]
```

Has the instance re-started? [Yes/No]

Now we will change the instance type from t3.micro to t3.small. To do this, run the following commands:

```
aws ec2 stop-instances --instance-ids [My-instance-ID]
aws ec2 wait instance-stopped --instance-ids [My-instance-ID]
aws ec2 modify-instance-attribute --instance-id [My-instance-ID] --instance-type "{\"Value\": \"t3.small\"}"
aws ec2 start-instances --instance-ids [My-instance-ID]
```

Did it change the instance type? [Yes/No]

Can you still get access to your instance?

By observing the script, and investigate what t3.micro and t3.small are, can you determine what has changed about your instance?

Now, revert the instance back to t3.micro, and suspend the instance.

D Creating and Securing a Windows 2022 Server

In this part of the lab we will create a Windows 2022 server instance with t3.micro (note, that this is very low for vCPUs and memory, so the performance may be a little lacking). First create a new instance, and give it a name, such as “MyWindowsServer” (Figure 17).

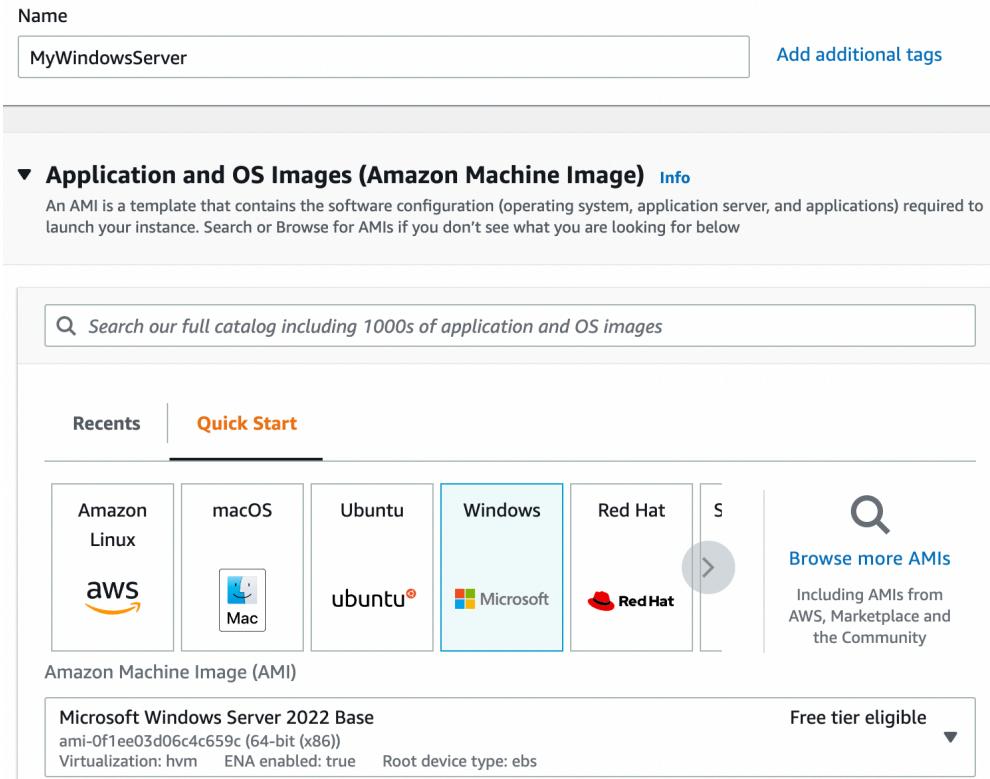


Figure 18: Creating Windows 2022 instance

Now select **t2.micro** for the instance type.

How many vCPUs will the instance have?

How much memory will it have?

How much will it cost per day to run?

If you selected, t2.medium, how much would it cost per day?

If you selected, t2.large, how much would it cost per day?

Now create a new key pair and save it to your local drive. This file contains your private key, and which you will need to connect to your instance. Accept all the other defaults.

Observe the firewall group that will be applied.

Which firewall ports are open on the instance?

What is the main issue with this firewall setting?

How would you change it, once you have created the instance?

Observe the disk storage setting for the instance.

What type of disk will be used? [HDD/SSD]

What is the advantage of using SSD?

For disk storage, what is the size of the disk that you will create?

What is the maximum storage size for a free tier storage of the AMI instance we are creating?

D.1 Creating the instance

Go ahead and create the instance. Go back to the Management Console and find your instance. Wait for it to set its state to running. Now we will connect to it. For this we need to create an RDP connection, and use the private key we have generated to generate the initial password.

Now, we will examine the details of our instance (Figure 18). On the instance summary, determine the following:

The public IP address:

The private IP address:

The instance type:

The public IPv4 DNS:

From your local host, can you ping the public IP address? [Yes/No]

Why can't you successfully ping your instance?

Which region of the world is your instance running in?

D.2 Enabling ICMP on firewall

Now we will enable ICMP on the instance. First click on the Security tab of the instance summary, and then on the security group.

What is the firewall rule that is applied to the instance?

[SSH/RDP/Telnet/FTP/HTTP/HTTPs] for [0.0.0.0/0 or 0.0.0.0/8 or 0.0.0.0/16 or 0.0.0.0/32]

What does 0.0.0.0/0 represent?

Now go ahead and add an ICMP rule for all hosts (Figure 19).

Can you now successfully ping your instance? [Yes/No]

We will not be able to ping the instance yet, as the firewall on Windows is disabling it.

| Instance summary for i-07d723258364f7172 (MyWindowsServer) | | |
|--|---|--|
| Updated less than a minute ago | | |
| Instance ID i-07d723258364f7172 (MyWindowsServer) | Public IPv4 address 54.83.154.0 open address | Private IPv4 addresses 172.31.85.24 |
| IPv6 address - | Instance state Running | Public IPv4 DNS ec2-54-83-154-0.compute-1.amazonaws.com open address |
| Hostname type IP name: ip-172-31-85-24.ec2.internal | Private IP DNS name (IPv4 only) ip-172-31-85-24.ec2.internal | Elastic IP addresses - |
| Answer private resource DNS name IPv4 (A) | Instance type t2.micro | AWS Compute Optimizer finding <small>Opt-in to AWS Compute Optimizer for recommendations.</small> |
| Auto-assigned IP address 54.83.154.0 [Public IP] | VPC ID vpc-0683f9b3d1038fd71 | Learn more |
| IAM Role - | Subnet ID subnet-07a3be17bcc59528b | Auto Scaling Group name - |

Figure 19: Details of instance

| Inbound rules Info | | | | | | |
|------------------------------------|---------------------------|-------------------------------|---------------------------------|-----------------------------|---|------------------------|
| Security group rule ID | Type Info | Protocol Info | Port range Info | Source Info | Description - optional Info | |
| sgr-0101b70fb7c795a97 | RDP | TCP | 3389 | Custom ▾ | <input type="text"/> Q 0.0.0.0/0 X | Delete |
| - | Custom ICMP - IPv4 ▾ | All | All | Anywh... ▾ | <input type="text"/> Q Ping All 0.0.0.0/0 X | Delete |

Figure 20: Enable ICMP

D.3 Accessing your instance

Now we will connect to our instance. For this you need RDP. Next Connect to instance (Figure 20). Click on “Get password” and present your PEM file, and it should reveal the password (Figure 21).

Session Manager | RDP client | EC2 serial console

Instance ID
 i-07d723258364f7172 (MyWindowsServer)

Connection Type

Connect using RDP client
Download a file to use with your RDP client and retrieve your password.

Connect using Fleet Manager
To connect to the instance using Fleet Manager Remote Desktop, the SSM Agent must be installed and running on the instance. For more information, see [Working with SSM Agent](#)

You can connect to your Windows instance using a remote desktop client of your choice, and by downloading and running the RDP shortcut file below:

 [Download remote desktop file](#)

When prompted, connect to your instance using the following details:

Public DNS
 ec2-54-83-154-0.compute-1.amazonaws.com

User name
 Administrator

Password [Get password](#)

Figure 21: Connect to instance

Connection Type

Connect using RDP client
Download a file to use with your RDP client and retrieve your password.

Connect using Fleet Manager
To connect to the instance using Fleet Manager Remote Desktop, the SSM Agent must be installed and running on the instance. For more information, see [Working with SSM Agent](#)

You can connect to your Windows instance using a remote desktop client of your choice, and by downloading and running the RDP shortcut file below:

 [Download remote desktop file](#)

When prompted, connect to your instance using the following details:

Public DNS
 ec2-54-83-154-0.compute-1.amazonaws.com

User name
 Administrator

Password
 7s8l-G?Jzzh;Lb8%KyGdmn6JwqReoRF-

Figure 21: Reveal password

Have you managed to connect? [Yes/No] (Figure 22)

By using “ipconfig” in your instance, what is the private IP address of it?

Can you ping 8.8.8.8 from your instance? [Yes/No]

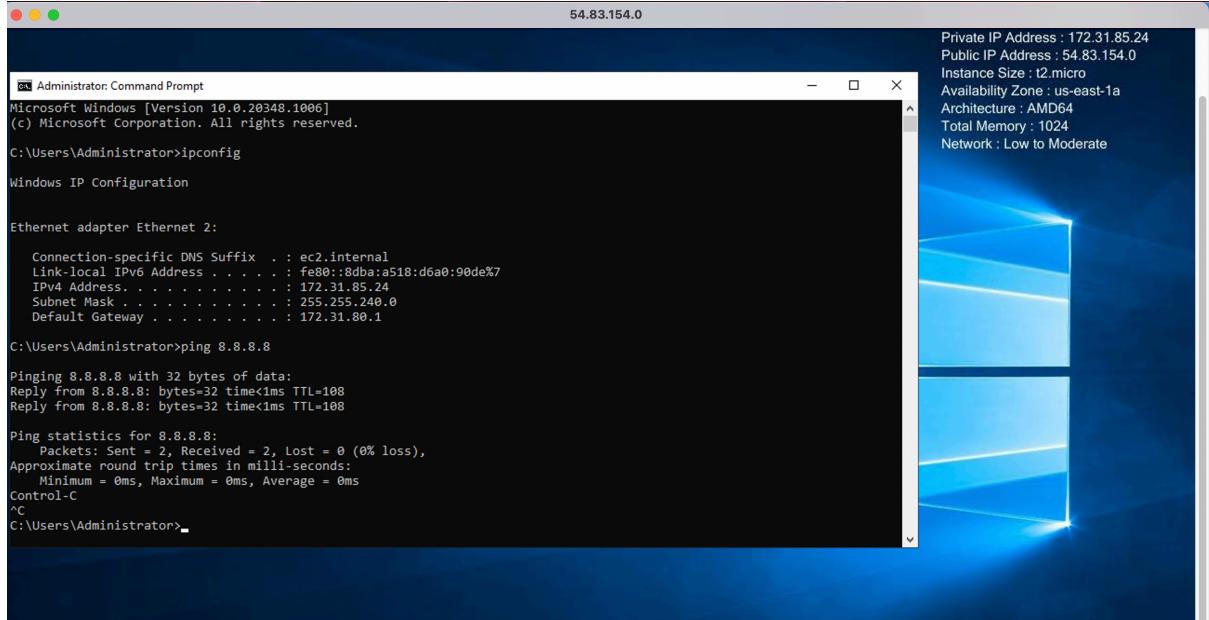


Figure 22: Windows 2022

D.4 Enable ICMP on instance

We have enabled the AWS firewall for ICMP. Now we will open-up ICMP in the instance. For this open-up with Advanced Windows firewall, and enable the rule for “File and Printer Sharing (ICMP-in) – as shown in Figure 23.

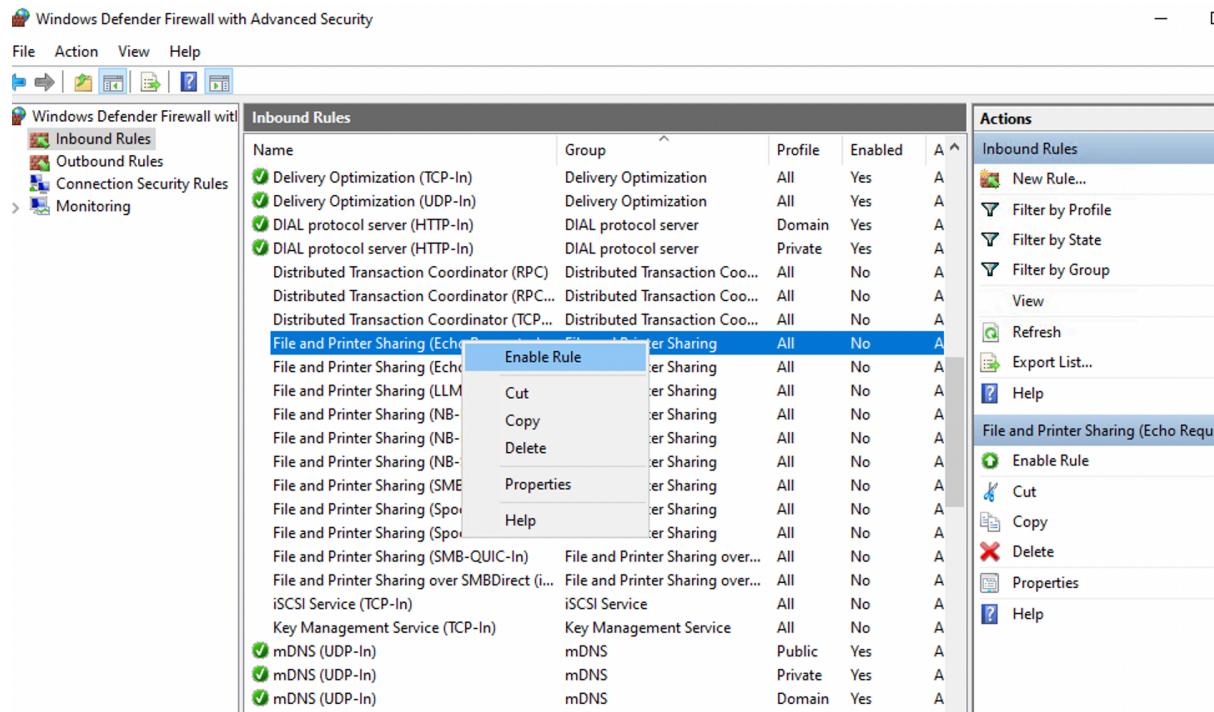


Figure 23: Enable ICMP

Can you successfully ping the instance from your instance? [Yes/No]

D.5 Show running services

Now examine the running services on the instance with:

```
$ netstat -i
$ netstat -i
```

Which of the main services are running:

D.6 Enable Web server

Now select Server Manage, and “Add a Role” for Web Server (IIS) (Figure 24).

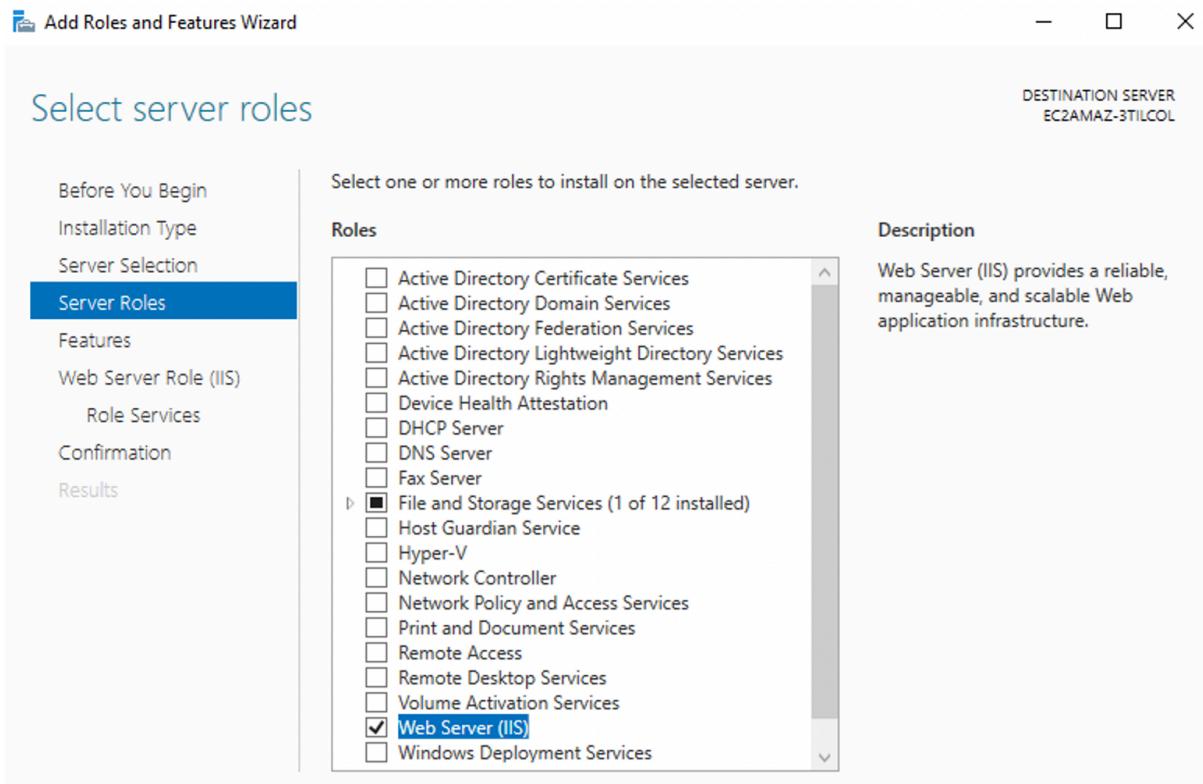


Figure 24: Enable Web Server

Now open a browser on the instance, and access <http://localhost>

Can you connect to the IIS Web server? [Yes/No] (see Figure 25)

Now open up your AWS firewall for Port 80 (Figure 25).

| Inbound rules Info | | | | | | |
|------------------------------------|---------------------------|-------------------------------|---------------------------------|-----------------------------|---|---|
| Security group rule ID | Type Info | Protocol Info | Port range Info | Source Info | Description - optional Info | |
| sgr-088cf5bfd7b0741f4 | All ICMP - IPv4 | ICMP | All | Custom ▾ | <input type="text" value="0.0.0.0"/> <input type="button" value="X"/> | <input type="button" value="Ping All"/> <input type="button" value="Delete"/> |
| sgr-0101b70fb7c795a97 | RDP | TCP | 3389 | Custom ▾ | <input type="text" value="0.0.0.0"/> <input type="button" value="X"/> | <input type="button" value="Delete"/> |
| - | HTTP | TCP | 80 | Anywh... ▾ | <input type="text" value="0.0.0.0"/> <input type="button" value="X"/> | <input type="button" value="Web"/> <input type="button" value="Delete"/> |

Figure 25: Enable HTTP

Now open a browser on the instance, and access [http://\[IP of AWS\]](http://[IP of AWS])

Can you connect to the IIS Web server? [Yes/No] (Figure 27)

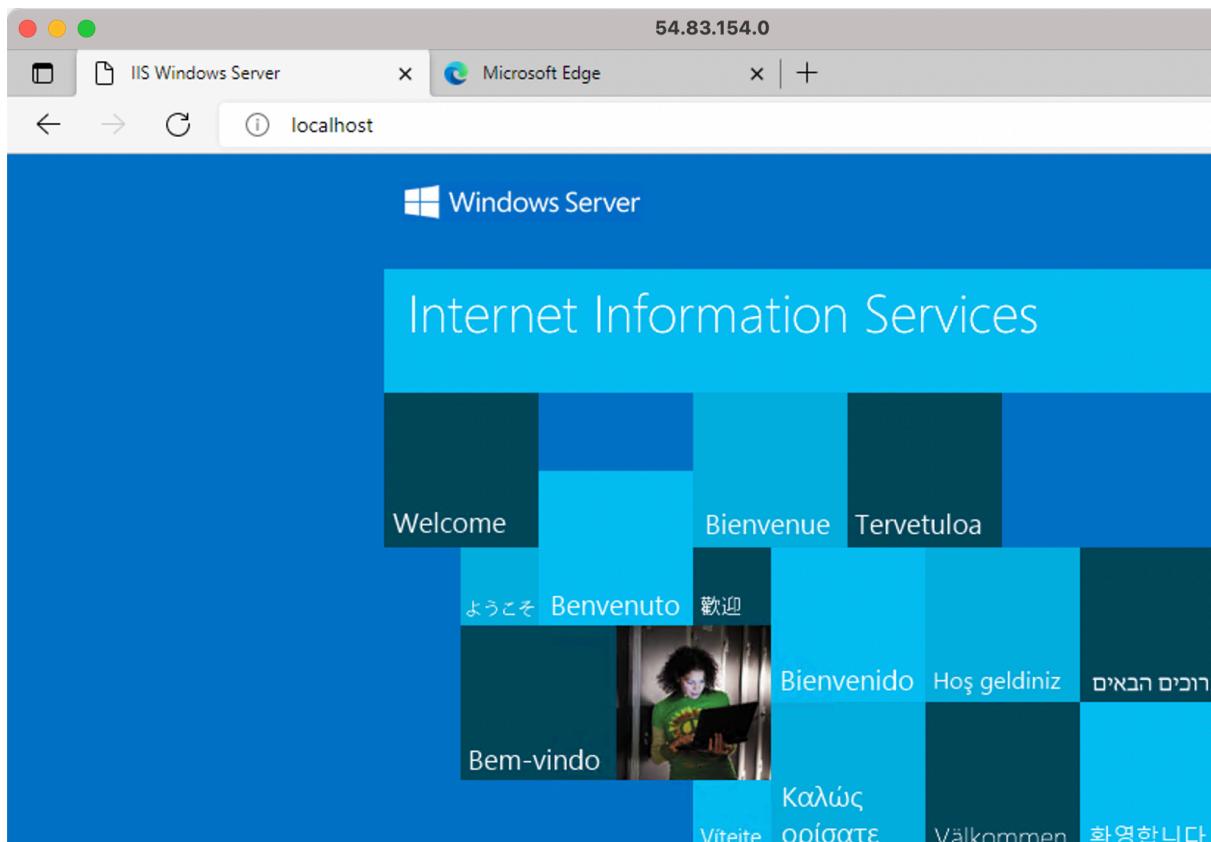


Figure 26: Local host

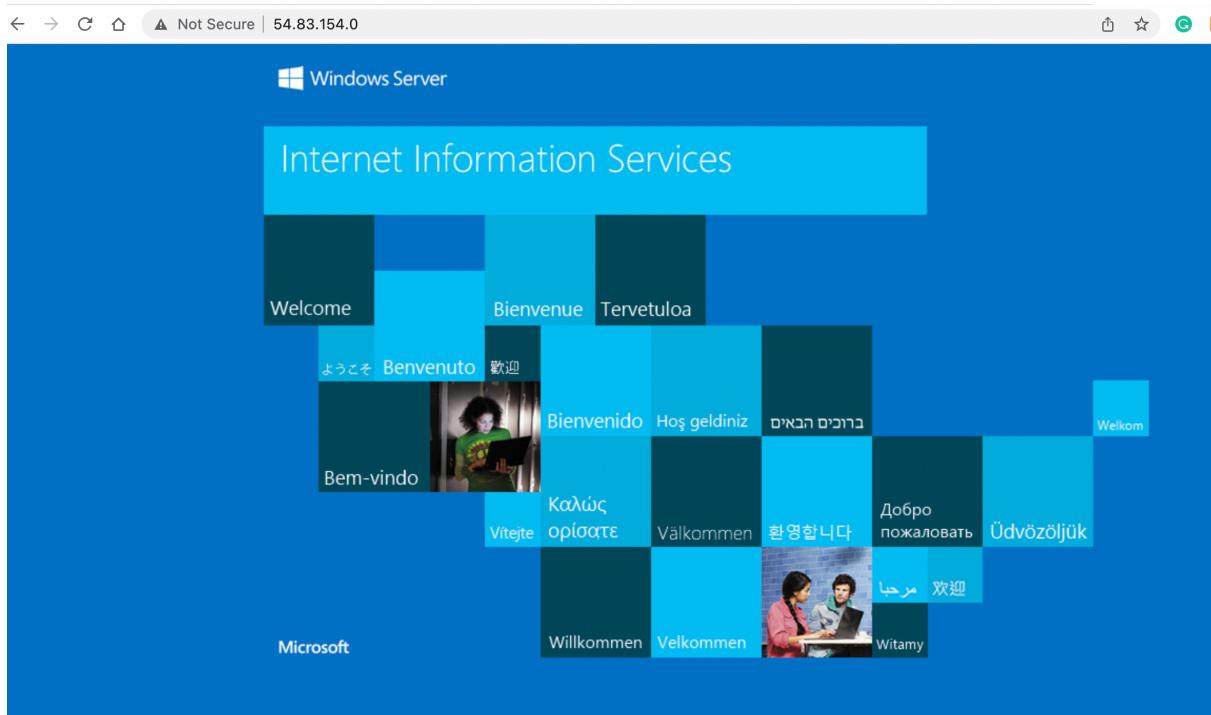


Figure 27: Remote access

Now go into the c:\inetpub\wwwroot folder, and create a file named “iisstart.html”, and add:

```
<h1>Main web site</h1>
<p>Hello to you</p>
```

And then save the file.

Has it changed the welcome? [Yes/No]

D.7 Auditing

The main logging output is in the “C:\inetpub\logs\LogFiles\W3SVC1” folder. Identify the contents of the following files:

Go into the “C:\inetpub\logs\LogFiles\W3SVC1” folder, and list the file in there. What are its contents? Can you identify your browser access? Which browser type accessed your Web server?

Now try with another browser type, and re-examine the log/httpd/access_log file. Did it detect the new browser type?

Now access a file that does not exist in your site (such as http://AWSIP/test.htm). Now re-examine the file. What is the status code returned for the access?

D.8 Changing Administrator password

We can change the Administrator password, with something like:

```
net user administrator mynewpassword$$7k1
```

E Python Access

Your unique account will have been generated, and you can access it with **aws_access_key_id** and **aws_secret_access_key** (from AWS details). You will also find that your console has been setup with the details already setup for you. For this, there is a hidden folder named **.aws**, and there is a file named **credentials** in there:


```
ddd_v1_w_w3n_1455598@runweb63277:~$ ls -al
drwxrwx--- 5 ddd_v1_w_w3n_1455598 apache          6144 Oct  2 10:13 .
drwxrwx--- 5 ddd_v1_w_w3n_1455598 apache          6144 Sep 29 10:32 ..
dr-xr-xr-x  2 ddd_v1_w_w3n_1455598 apache          6144 Sep 29 12:08 .aws
-rw-rw-r--  1 ddd_v1_w_w3n_1455598 apache          51   Sep 29 10:32 .gitconfig
drwxr-x--- 2 ddd_v1_w_w3n_1455598 apache          6144 Sep 29 12:08 .ssh
-rw-r--r--  1 root           root            3851 Oct  4 02:44 .termrc
dr-xr-xr-x  2 root           root            6144 Sep 29 10:32 .voc
ddd_v1_w_w3n_1455598@runweb63277:~$ cd .aws
ddd_v1_w_w3n_1455598@runweb63277:~/aws$ ls -al
dr-xr-xr-x  2 ddd_v1_w_w3n_1455598 apache 6144 Sep 29 12:08 .
drwxrwx--- 5 ddd_v1_w_w3n_1455598 apache 6144 Oct  2 10:13 ..
-r--r--r--  1 ddd_v1_w_w3n_1455598 apache  29 Oct  4 00:19 config
-r--r--r--  1 ddd_v1_w_w3n_1455598 apache 501 Oct  4 00:19 credentials
ddd_v1_w_w3n_1455598@runweb63277:~/aws$ cat credentials
```

List the contents of the credentials file, and verify that it contains the same credentials as from the AWS details button.

Are they the same? [Yes/No]

Now create a Python file which will show your instances in the terminal window (such as 1.py):

```
import boto3
ec2 = boto3.client('ec2', region_name='us-east-1')
ec2.describe_instances()
```

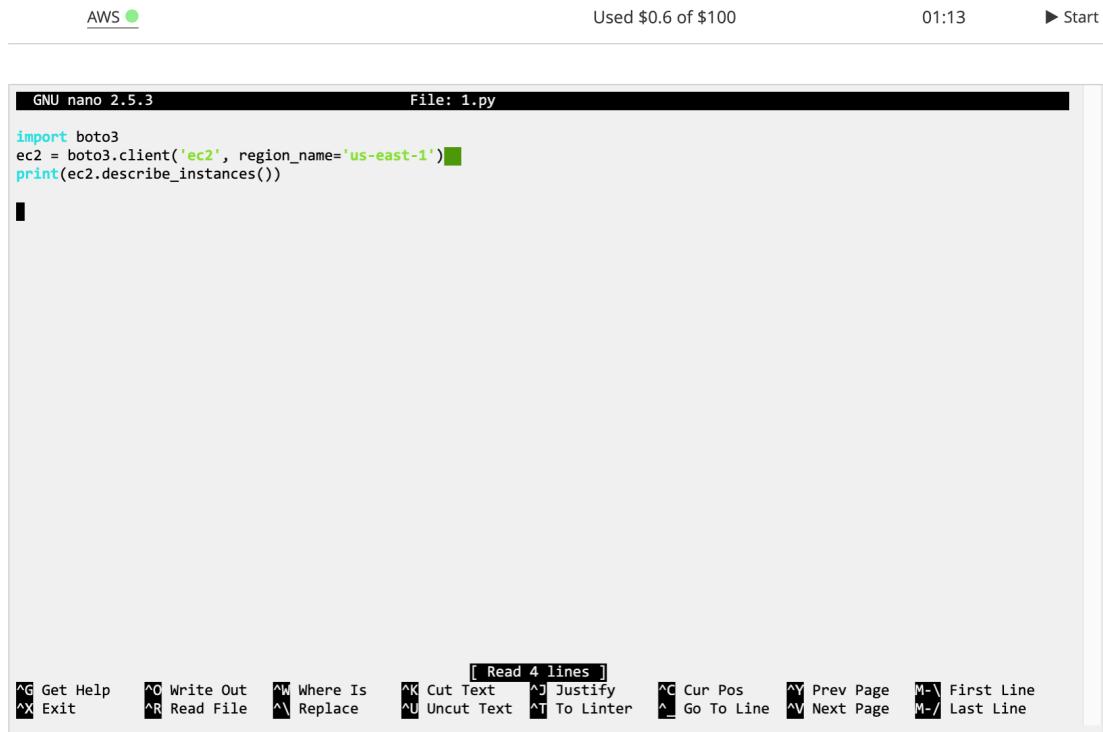

The screenshot shows a terminal window titled "File: 1.py" with the following content:


```
GNU nano 2.5.3
import boto3
ec2 = boto3.client('ec2', region_name='us-east-1')
print(ec2.describe_instances())
```

The terminal interface includes standard nano editor key bindings at the bottom:

- [Read 4 lines]
- ^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos ^Y Prev Page M-} First Line
- ^X Exit ^R Read File ^A Replace ^U Uncut Text ^T To Linter ^H Go To Line ^V Next Page M-/ Last Line

Figure 28: Python file creation

Save the file, and then run the file with Python3 and prove that it shows your instances (see Figure 29).

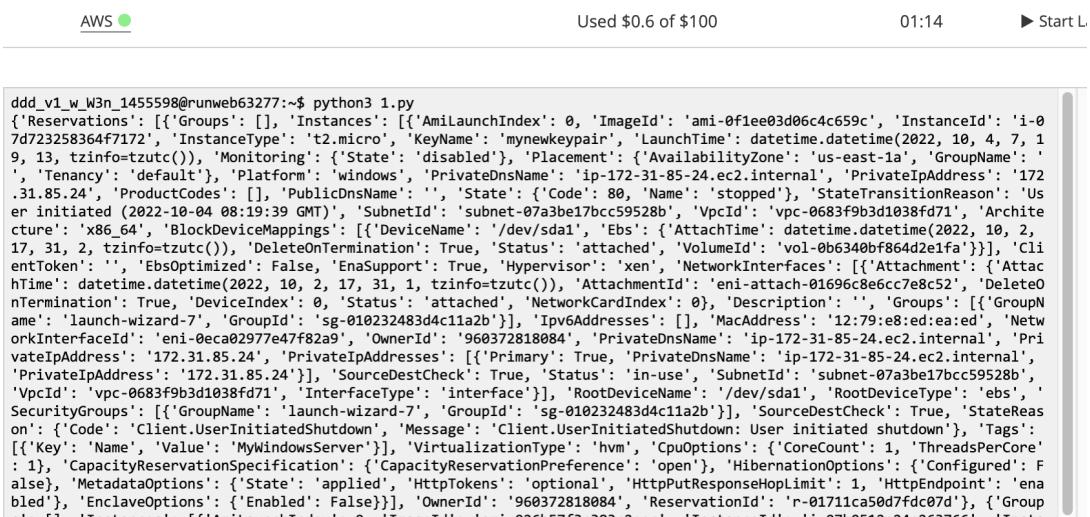

The screenshot shows the terminal output of running the Python script:

```
ddd_v1_w_W3n_1455598@runweb63277:~$ python3 1.py
{'Reservations': [{...}], 'Instances': [...]}
```

The output lists several EC2 instances with their details such as InstanceId, State, and NetworkInterface details.

Figure 29: Running the Python3 file

Does the Python3 program show your instances? [Yes/No]

Now we will stop one of our instances. For this, get an instance name, and add it to the following file:

```
import boto3
ec2 = boto3.client('ec2', region_name='us-east-1')
ec2.stop_instances(InstanceIds=["i-07b0512e24xxxxxx"])
```

Now run the Python file, and prove that it has stopped your instance.

Does the Python3 program stop your instance? [Yes/No]

Now we will restart one of our instances. For this, get an instance name, and add it to the following file:

```
import boto3
ec2 = boto3.client('ec2', region_name='us-east-1')
ec2.start_instances(InstanceIds=["i-07b0512e24xxxxxx"])
```

Now run the Python file, and prove that it has stopped your instance.

Does the Python3 program start your instance? [Yes/No]

Finally, write a Python3 program which will start both of your instances, and another one to stop them both.

Do your Python3 programs work? [Yes/No]

You can also use the AWS prompt. Now try to start and stop your instances with:

```
aws ec2 stop-instances --instance-ids i-07b0512e24xxxxxx
```

and

```
aws ec2 start-instances --instance-ids i-07b0512e24xxxxxx
```

Do these command line programs work? [Yes/No]

Now we will create a keypair with Python, and then create a new Linux instance. First create the keypair with the Python file of:

```
import boto3
ec2 = boto3.client('ec2', region_name='us-east-1')
outfile = open('mykeypair.pem','w')

key_pair = ec2.create_key_pair(KeyName='mykeypair2')
MyKeyPair = key_pair["KeyMaterial"]

print(MyKeyPair)
```

What is the name of your key pair? Can you find it in your AWS Management console?
[Yes/No]

Now we will create a Linux instance. Take a note of the AMI for your Linux instance, and check that it is the same as the instance below Now create create.py, and save the file:

```
import boto3
ec2 = boto3.resource('ec2')

# create a new EC2 instance
instances = ec2.create_instances(
    ImageId='ami-026b57f3c383c2eec',
    MinCount=1,
    MaxCount=2,
    InstanceType='t2.micro',
    KeyName='mykeypair2'
)
```

Finally run the instance. Has it created the instance? [Yes/No]

If it has created it, now terminate it. Has it been terminated? [Yes/No]

```
ddd_v1_w_W3n_1455598@runweb63485:~$ python3 keypair.py
-----BEGIN RSA PRIVATE KEY-----
MIIEpAIBAAKCAQEAI1fo8IBjSKYxVBFsrvoLKO08z+JrhFgL9dvJSuyxlxnP5Hts
SQawOKN/OKONGiu0r0p8BQNwkhTcwem1j0h6vss5vmyaXq4uJe30iCACoKfHtsjw
OMgxwblyAaT2KkFF3B7sdIOk4tBHUFsu/Stzn4IpU6XktAx/C/8TuUIx7sh8RAKsGR
6qxWyeUh8jVsP0Q+5HPTx+30byZGDeiqhYxw4iRBkugG2ukX7KsLnEpNdv0m58
w4wTMObB0Pgwnun7MNF+gM+6/VtnraJia19amTMhvtk4F6bG6qgyH3DXQmm3VP64
MvJQR3QigMtq9WKYP3deASN7L0zKjzVgXHso1QIDAQABoIBAEP1/BSY5rUpcbRI
KjShspMZ+5awlalYM/PhwbG+rYfN6uAoauD8+VKIHkz34k60EysatDAAFaYR3e1m
f1AGnW07NuHL7ICd+v8K1Gxna2yse1QvxvoQ211IKgON3p5tUZCwVR1KDFexzhD
nkjBy3txIoTbKE4nId42IudQANRtgJ2GN+iw+T6UgQ6dchRw7Z35V+txw1lpSEQk
V680fa13MD8+Nj1bJrKjDJSIB4Scav/KtIq53eXX8bHki/3CL78mjVC0kPb5Ir8Z
7YKo02Xw9W4jOghjhSh22bmLsbEJnuICci8Zsh+4Im+3lSVwQFdjq7pTsCQkNGYQ
QSv7yaECgYEAgUwTvBWDNUTH6cf18SRZ4zp1RKDWSuufAvhiPH3oq96o5NTILxXM
UDnFmW8x43MH4aG5LjLtaosnwAIDAgFuLwbQDZPsBNaHy8+t1NxW2iAldc/5v3vQ
qMGCoY+ak3/boye7X16WuYbWXDXxYAKaYo+hxwQp9MDnW/FmPHmnU8CgYEAgqog
1YyAnuYrmEM9/FIVDH1FyrIEUzck79oCcYuONRGqkbMt7d5DIjpVGGPmTnEcFr
LlyCaiWfyxQVa5BTGCogNxGdsYPD7aEk6b+Etc8gKdA9bMUZ60Xq9R0pegNuRABy
93wZhGwmxghS/st3wqAGtzzJrJIXE0+sWD5Q9psCgYBtst2oR3dkiyC8tyYue6Yj
yHv/ZweKJqqzDV96feVvVGMTsBTmf8xpBhrKgjU0m+uDQCyj2R4qUV63d3kGF7rm
9Mx0eq29SRRS2OE0kTFxWl+CKyLZeqy+ENa68wDAFcUHVAdYcmhhrAik5VOYXL7Q
5XdKI3vHkw36IKB3/urWwKBgQCu/VTkyhRz6cIilioYCYGmwZgU0TTp6b4m8zn6
5+059ZoIi116o0Mk0sfkY6g4o+pHun1NyjBXxsszf03LvW39Fn2ZvjuVW0276
XBXzmdqrOh1EcisM1ioiy9NzFcioI8a3FE0+NqHnfD/p2zUfo9LyfoI5RwOC4DC
gR3Q9wKBgQChA1NS0muZ8sSyJqTr2XwJ5wI5RDHWQHJ5maDJQHASYDwCrcD841
c+f817A9G3E3CSytM1BxLudt7INe9pFx+FSoouTvgiAPAtAhS7iGnb9Vxhxx27
47hh8xhtwUqSf6/yaY7WCKuGEUAh3iIJpiyt7Me71aUTox/+je1Kgg==
-----END RSA PRIVATE KEY-----
ddd_v1_w_W3n_1455598@runweb63485:~$ python create.py
```

Figure 30: Creating an instance

NOW TERMINATE YOUR NEWLY CREATED INSTANCE (and any others you have created with Python)!

At the end of the lab, you should only have two instances. Please either terminate these, or stop them.