Residual covariance comparison: lag_rate_per_century

10 offsets; same observations, fixed effects, REML and era/site residual variances within each offset

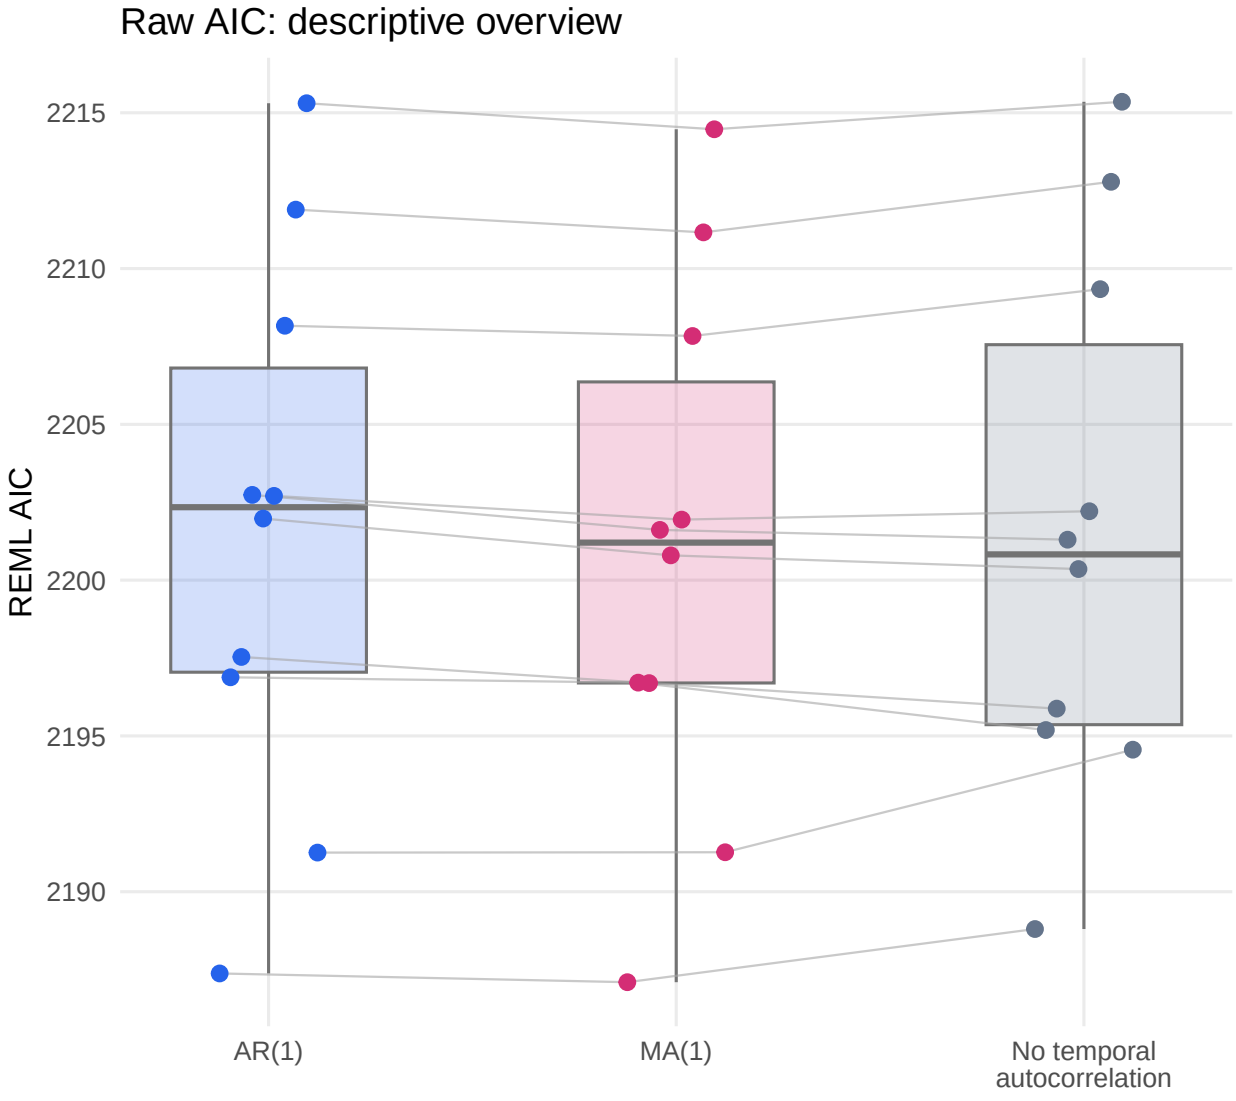

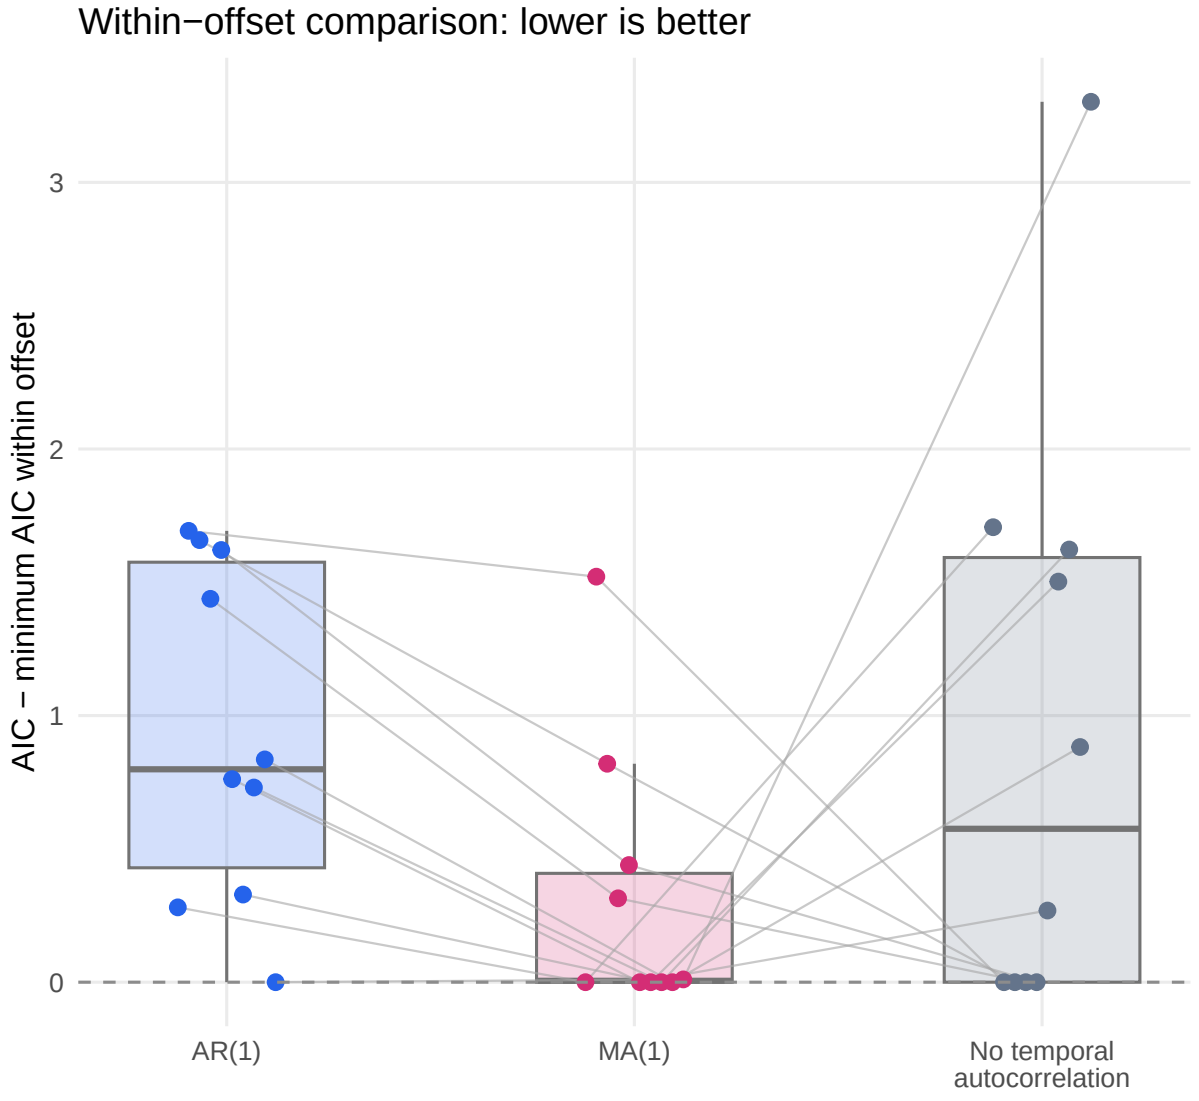

Boxes summarize the configured offsets; dots are individual fits; grey lines connect the same offset.
Use within−offset differences for selection: raw AICs across offsets involve different observations and sample sizes.
Offsets reuse modern plots and are sensitivity fits, not independent replicates. Covariance selection remains a scientific decision.