
How an individual charcoal peak becomes an accepted fire event

The detection settings differ among cores; the later 1,000−year high−fire classification is a separate step.

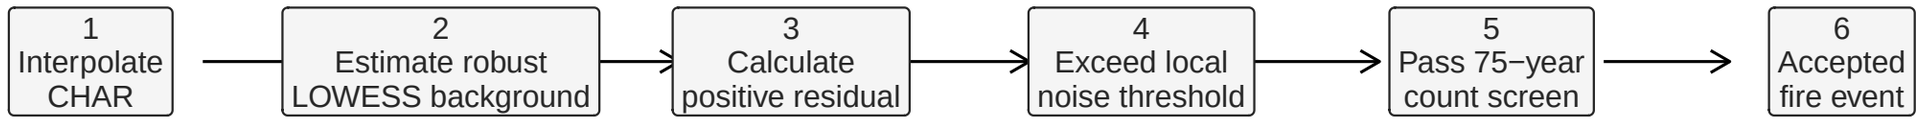


	Engine	Chronology	Interpolation (years)	Background (years)	Noise percentile	Candidates	Count−screen rejected	Accepted
Sunrise Lake	tapas	published core chronology	48	800	95%	26	9	17
Shadow Lake	tapas	published core chronology	47	1000	95%	17	3	14
Little Sunrise Lake	tapas	published core chronology	42	500	95%	20	7	13
Panther Potholes	tapas	active PaleoACES Bacon median chronology	12	500	99%	66	0	66

Accepted event = one distinct positive residual excursion above the local noise threshold that survives the count screen.
All four primary catalogs use tapas; each record retains its publication−specific temporal and threshold settings.
Accepted events are inferred charcoal episodes, not exact known ignition dates and not yet high−fire periods.

Accepted−event detection: Sunrise Lake


MORA | tapas | interpolation 48 yr | background 800 yr | local threshold 95% | count screen p <= 0.05 | candidates 26 | rejected 9 | accepted 17

1−2 Interpolate CHAR and estimate background

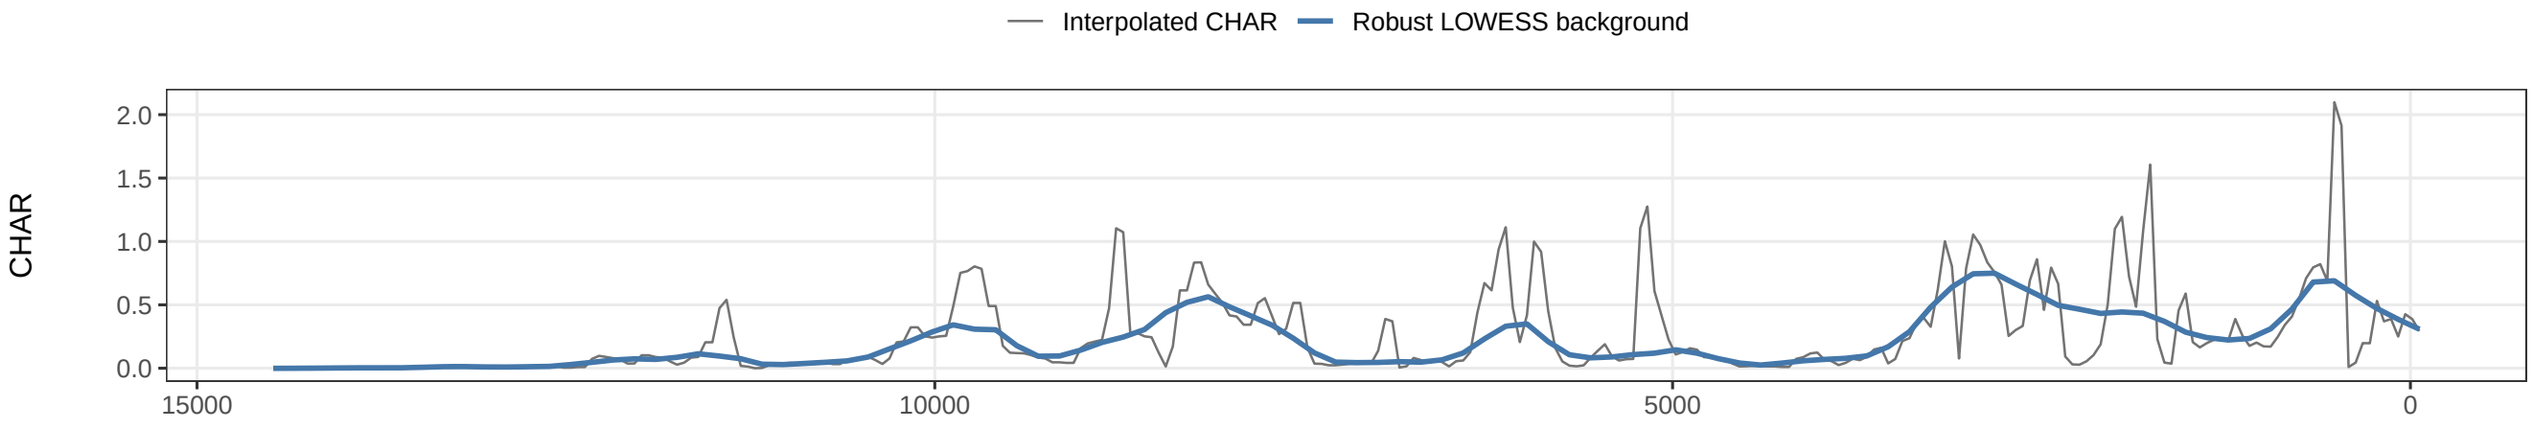


3−4 Residual peak and local 95% noise threshold

Dashed = threshold; filled circle = accepted; red X = rejected by count screen

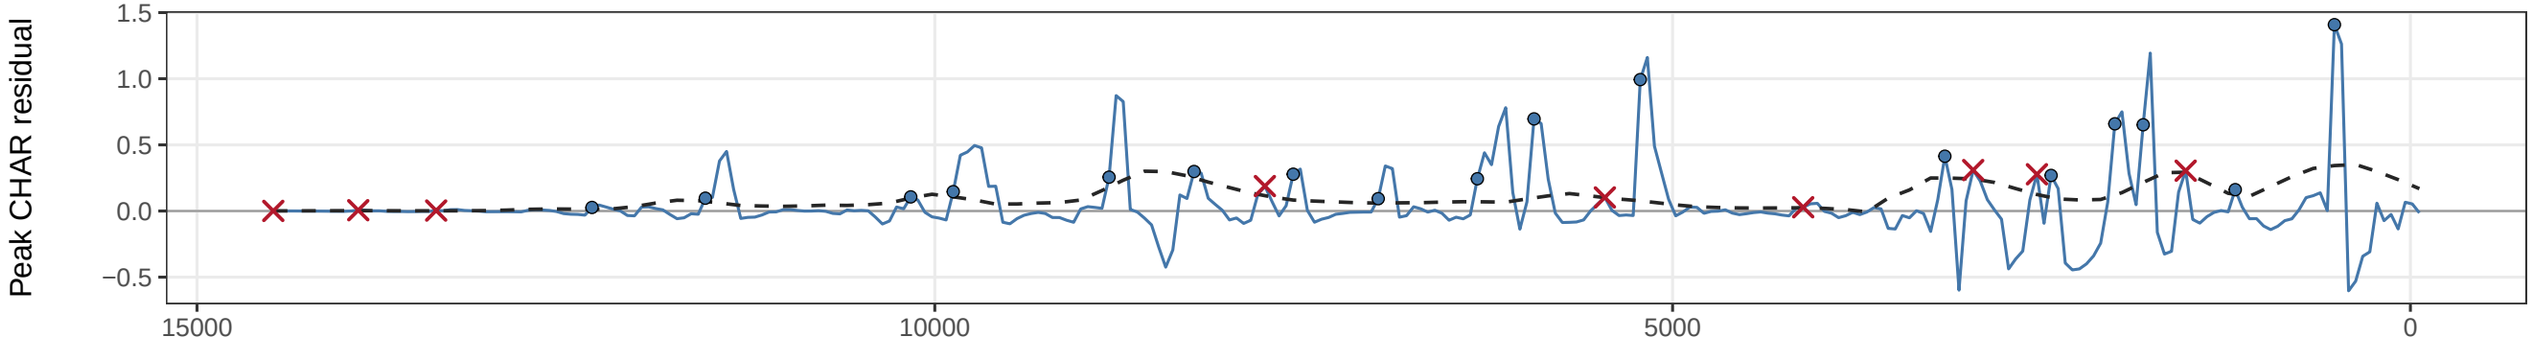

5−6 Minimum−count screen and accepted events


tapas applies p <= 0.05; its returned object retains candidate disposition rather than each p value

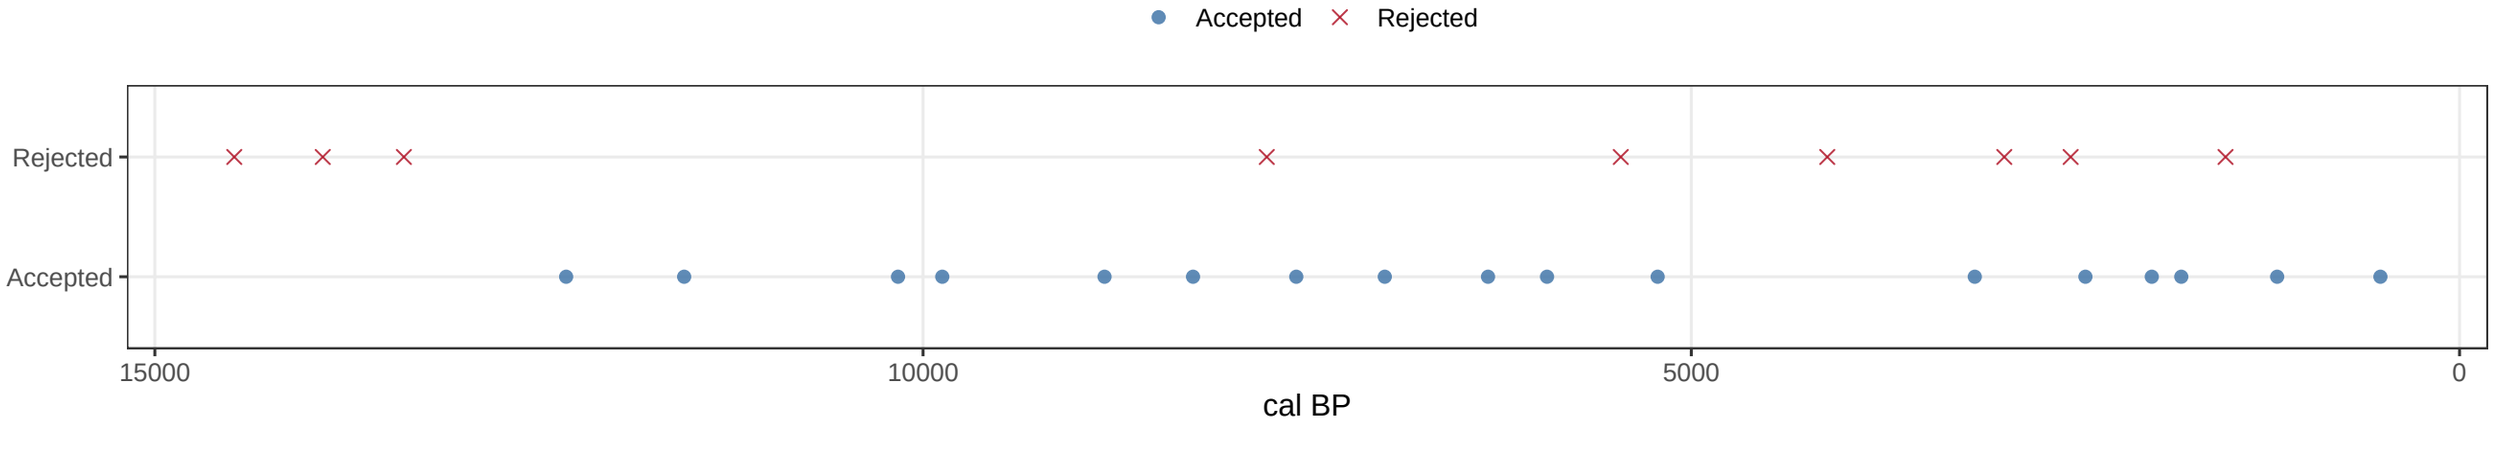

Accepted−event detection: Shadow Lake


MORA | tapas | interpolation 47 yr | background 1000 yr | local threshold 95% | count screen p <= 0.05 | candidates 17 | rejected 3 | accepted 14

1−2 Interpolate CHAR and estimate background

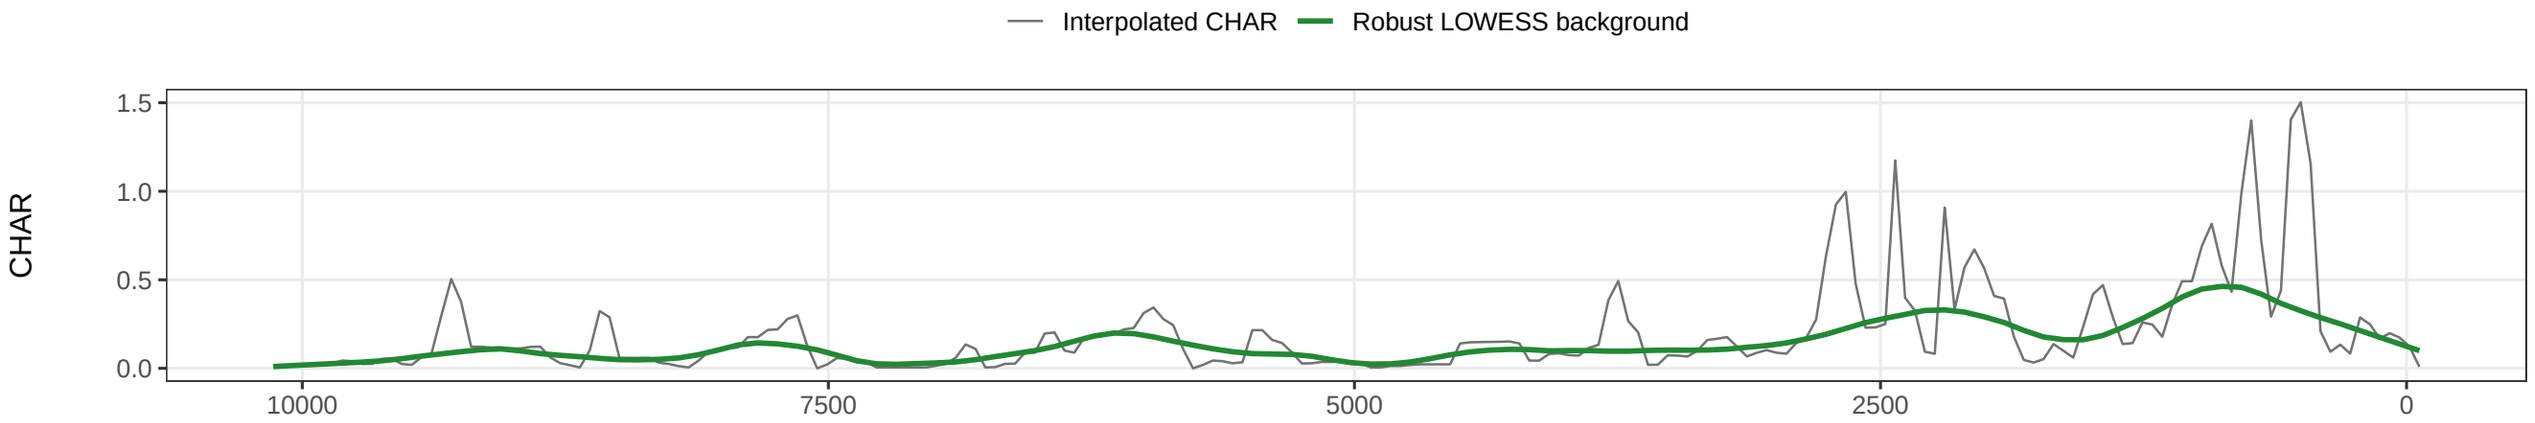


3−4 Residual peak and local 95% noise threshold

Dashed = threshold; filled circle = accepted; red X = rejected by count screen

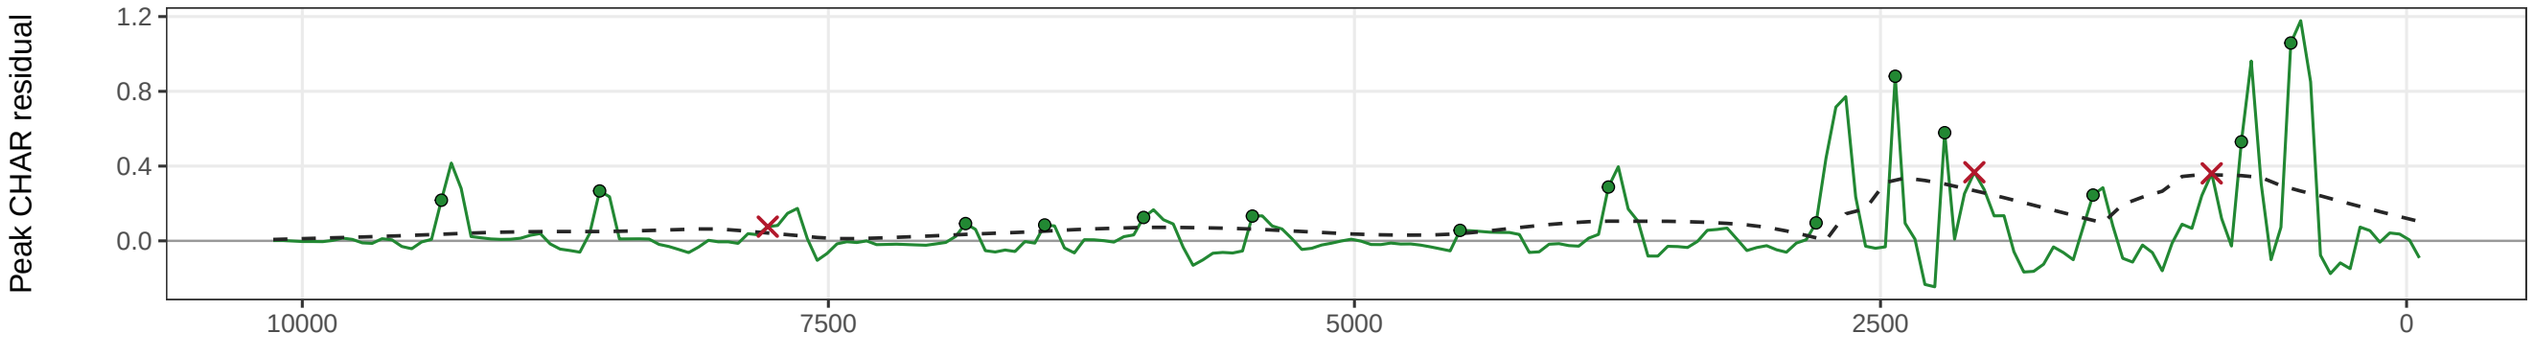

5−6 Minimum−count screen and accepted events


tapas applies p <= 0.05; its returned object retains candidate disposition rather than each p value

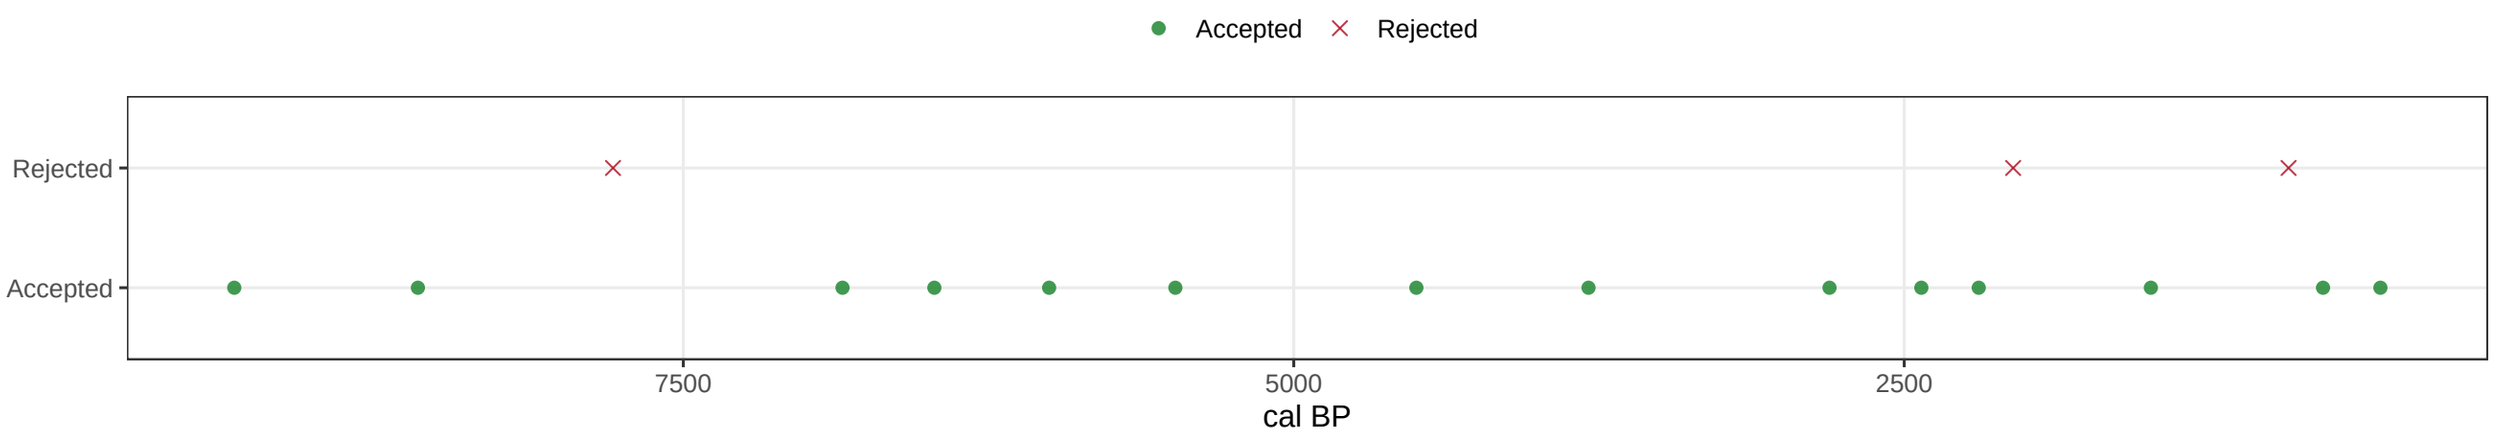

Accepted−event detection: Little Sunrise Lake


MORA | tapas | interpolation 42 yr | background 500 yr | local threshold 95% | count screen p <= 0.05 | candidates 20 | rejected 7 | accepted 13

1−2 Interpolate CHAR and estimate background

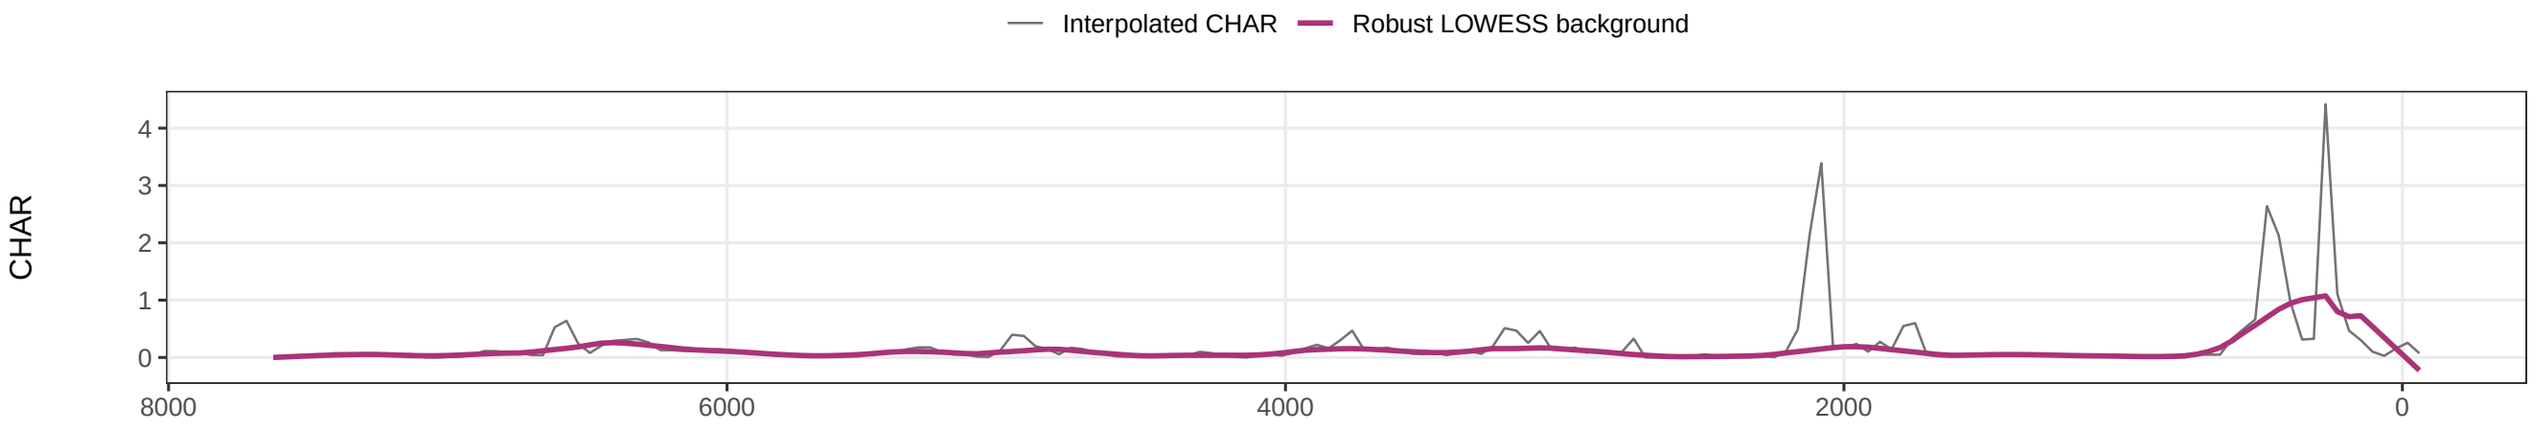


3−4 Residual peak and local 95% noise threshold

Dashed = threshold; filled circle = accepted; red X = rejected by count screen

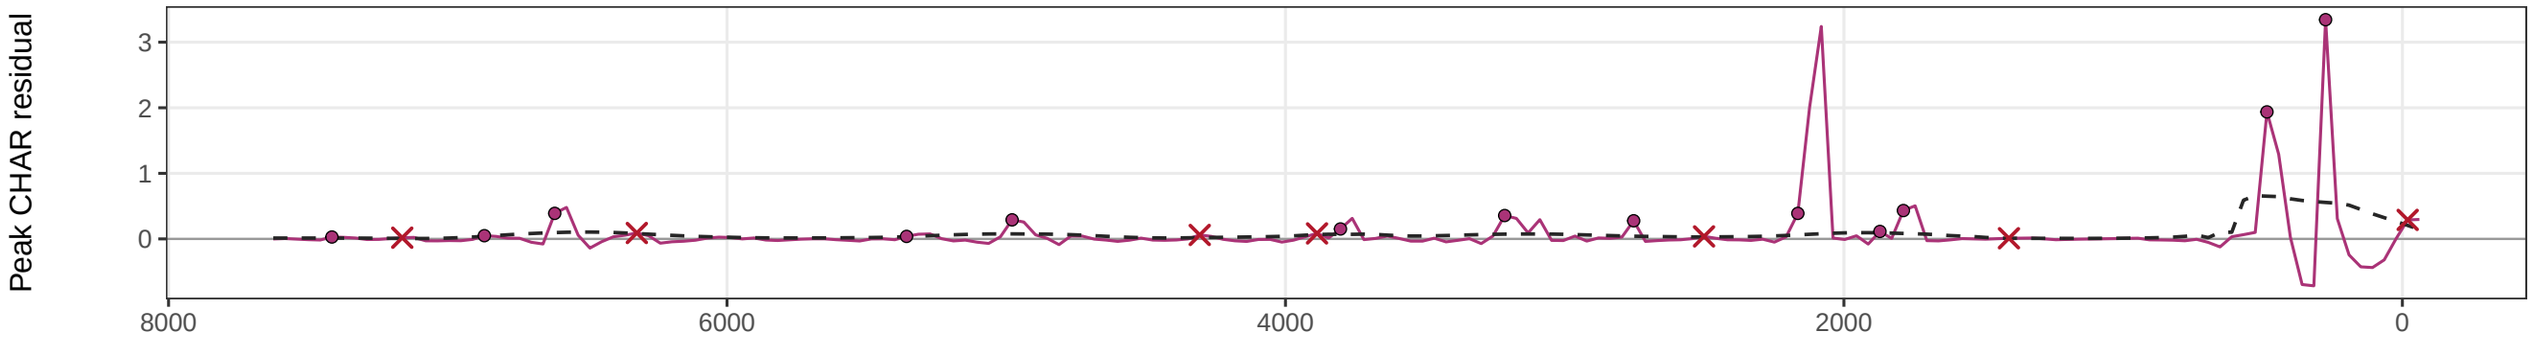

5−6 Minimum−count screen and accepted events


tapas applies p <= 0.05; its returned object retains candidate disposition rather than each p value

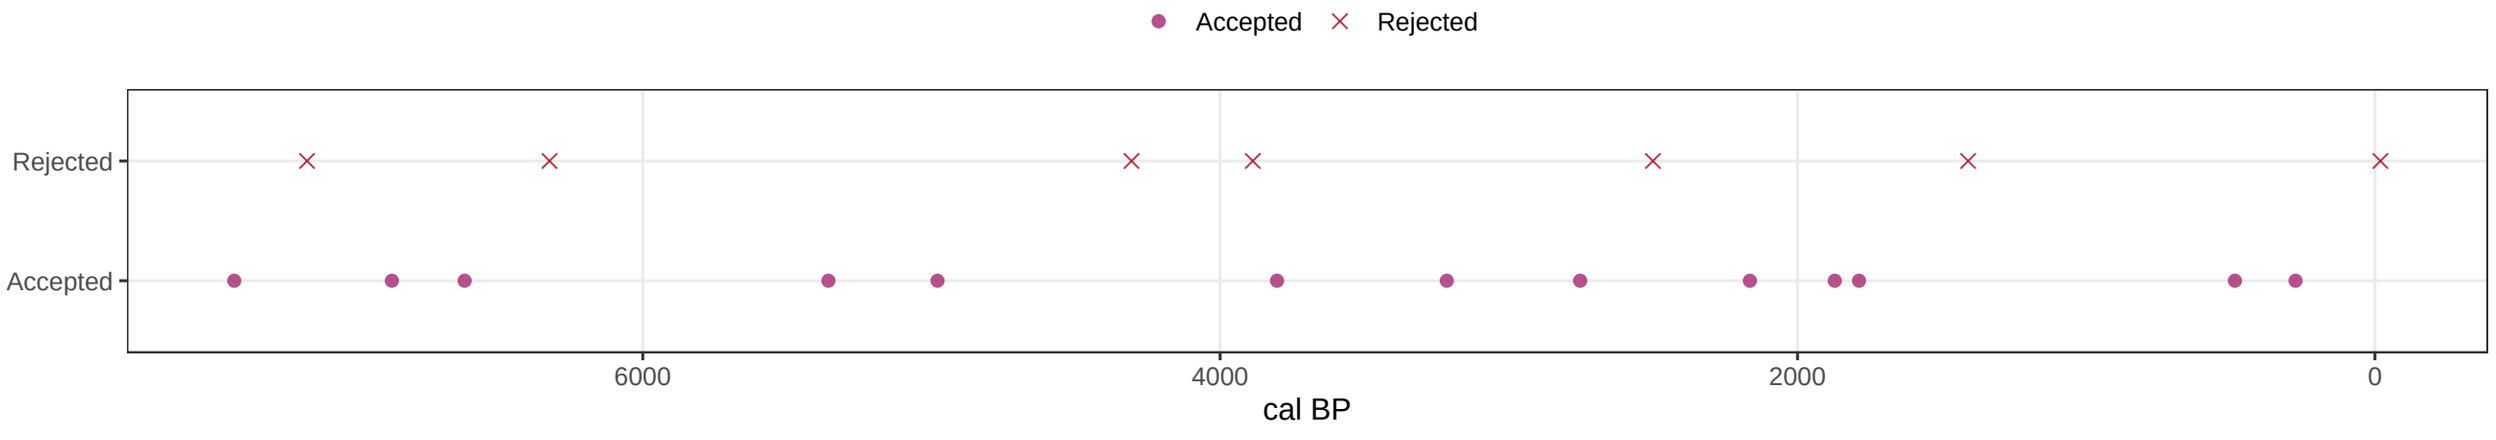

Accepted−event detection: Panther Potholes


NOCA | tapas | interpolation 12 yr | background 500 yr | local threshold 99% | count screen p <= 0.05 | candidates 66 | rejected 0 | accepted 66

1−2 Interpolate CHAR and estimate background

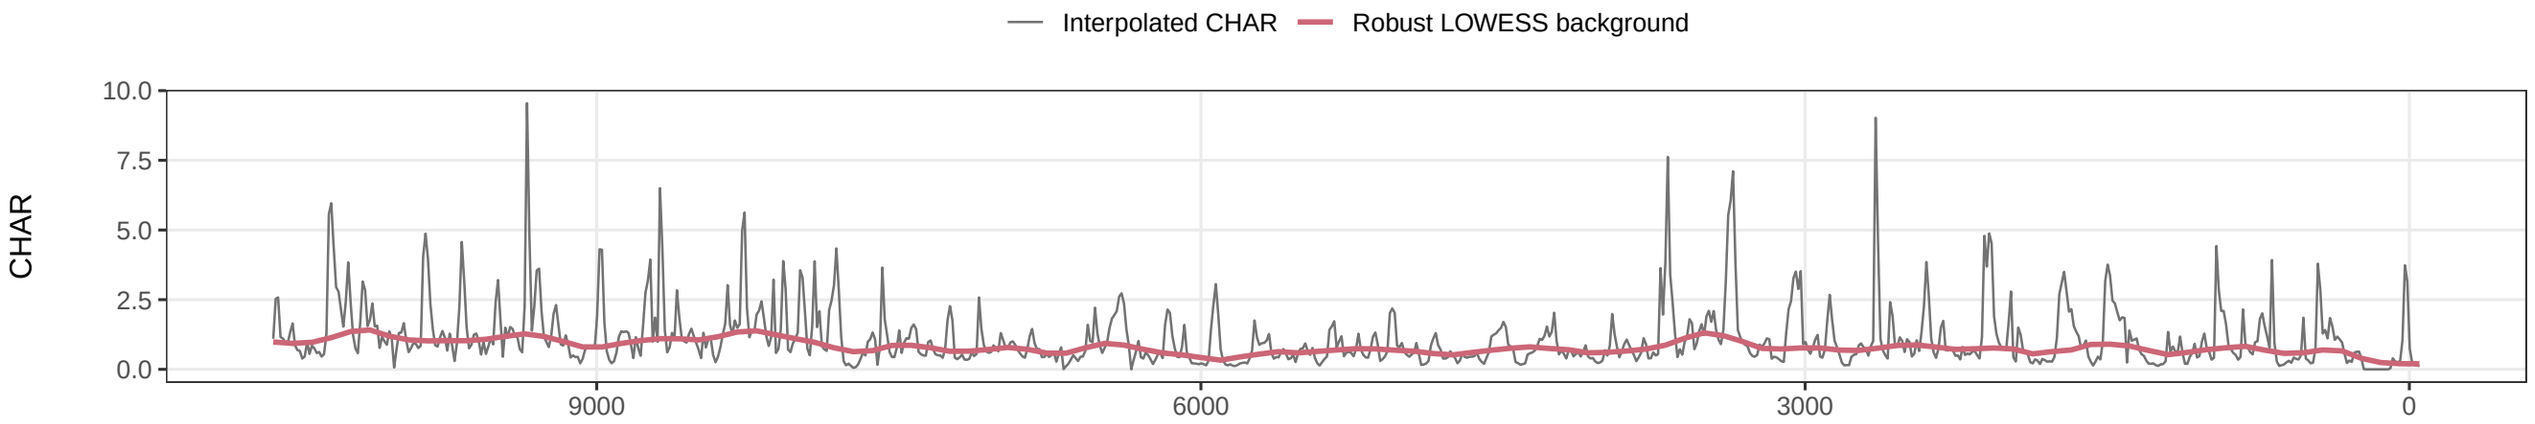


3−4 Residual peak and local 99% noise threshold

Dashed = threshold; filled circle = accepted; red X = rejected by count screen

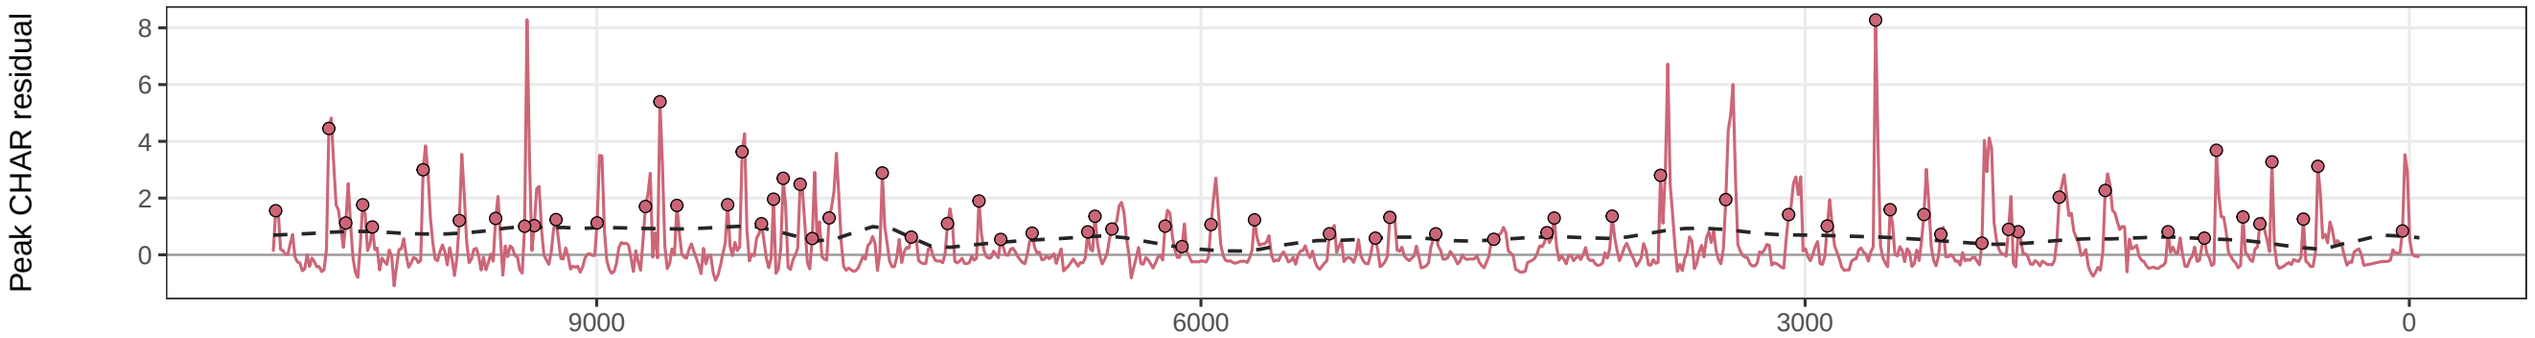


5−6 Minimum−count screen and accepted events

tapas applies p <= 0.05; its returned object retains candidate disposition rather than each p value

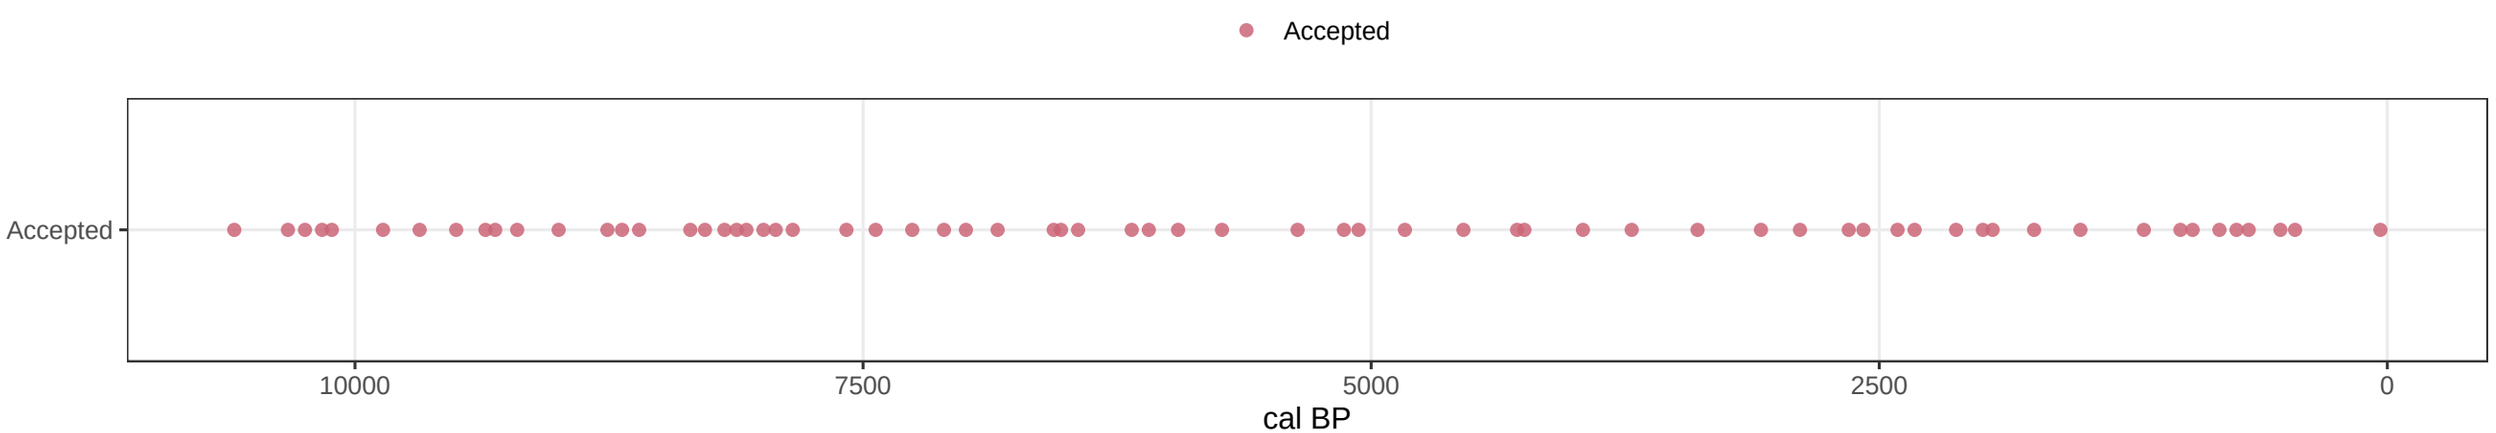

Walsh publication totals, official audit, and harmonized primary catalog

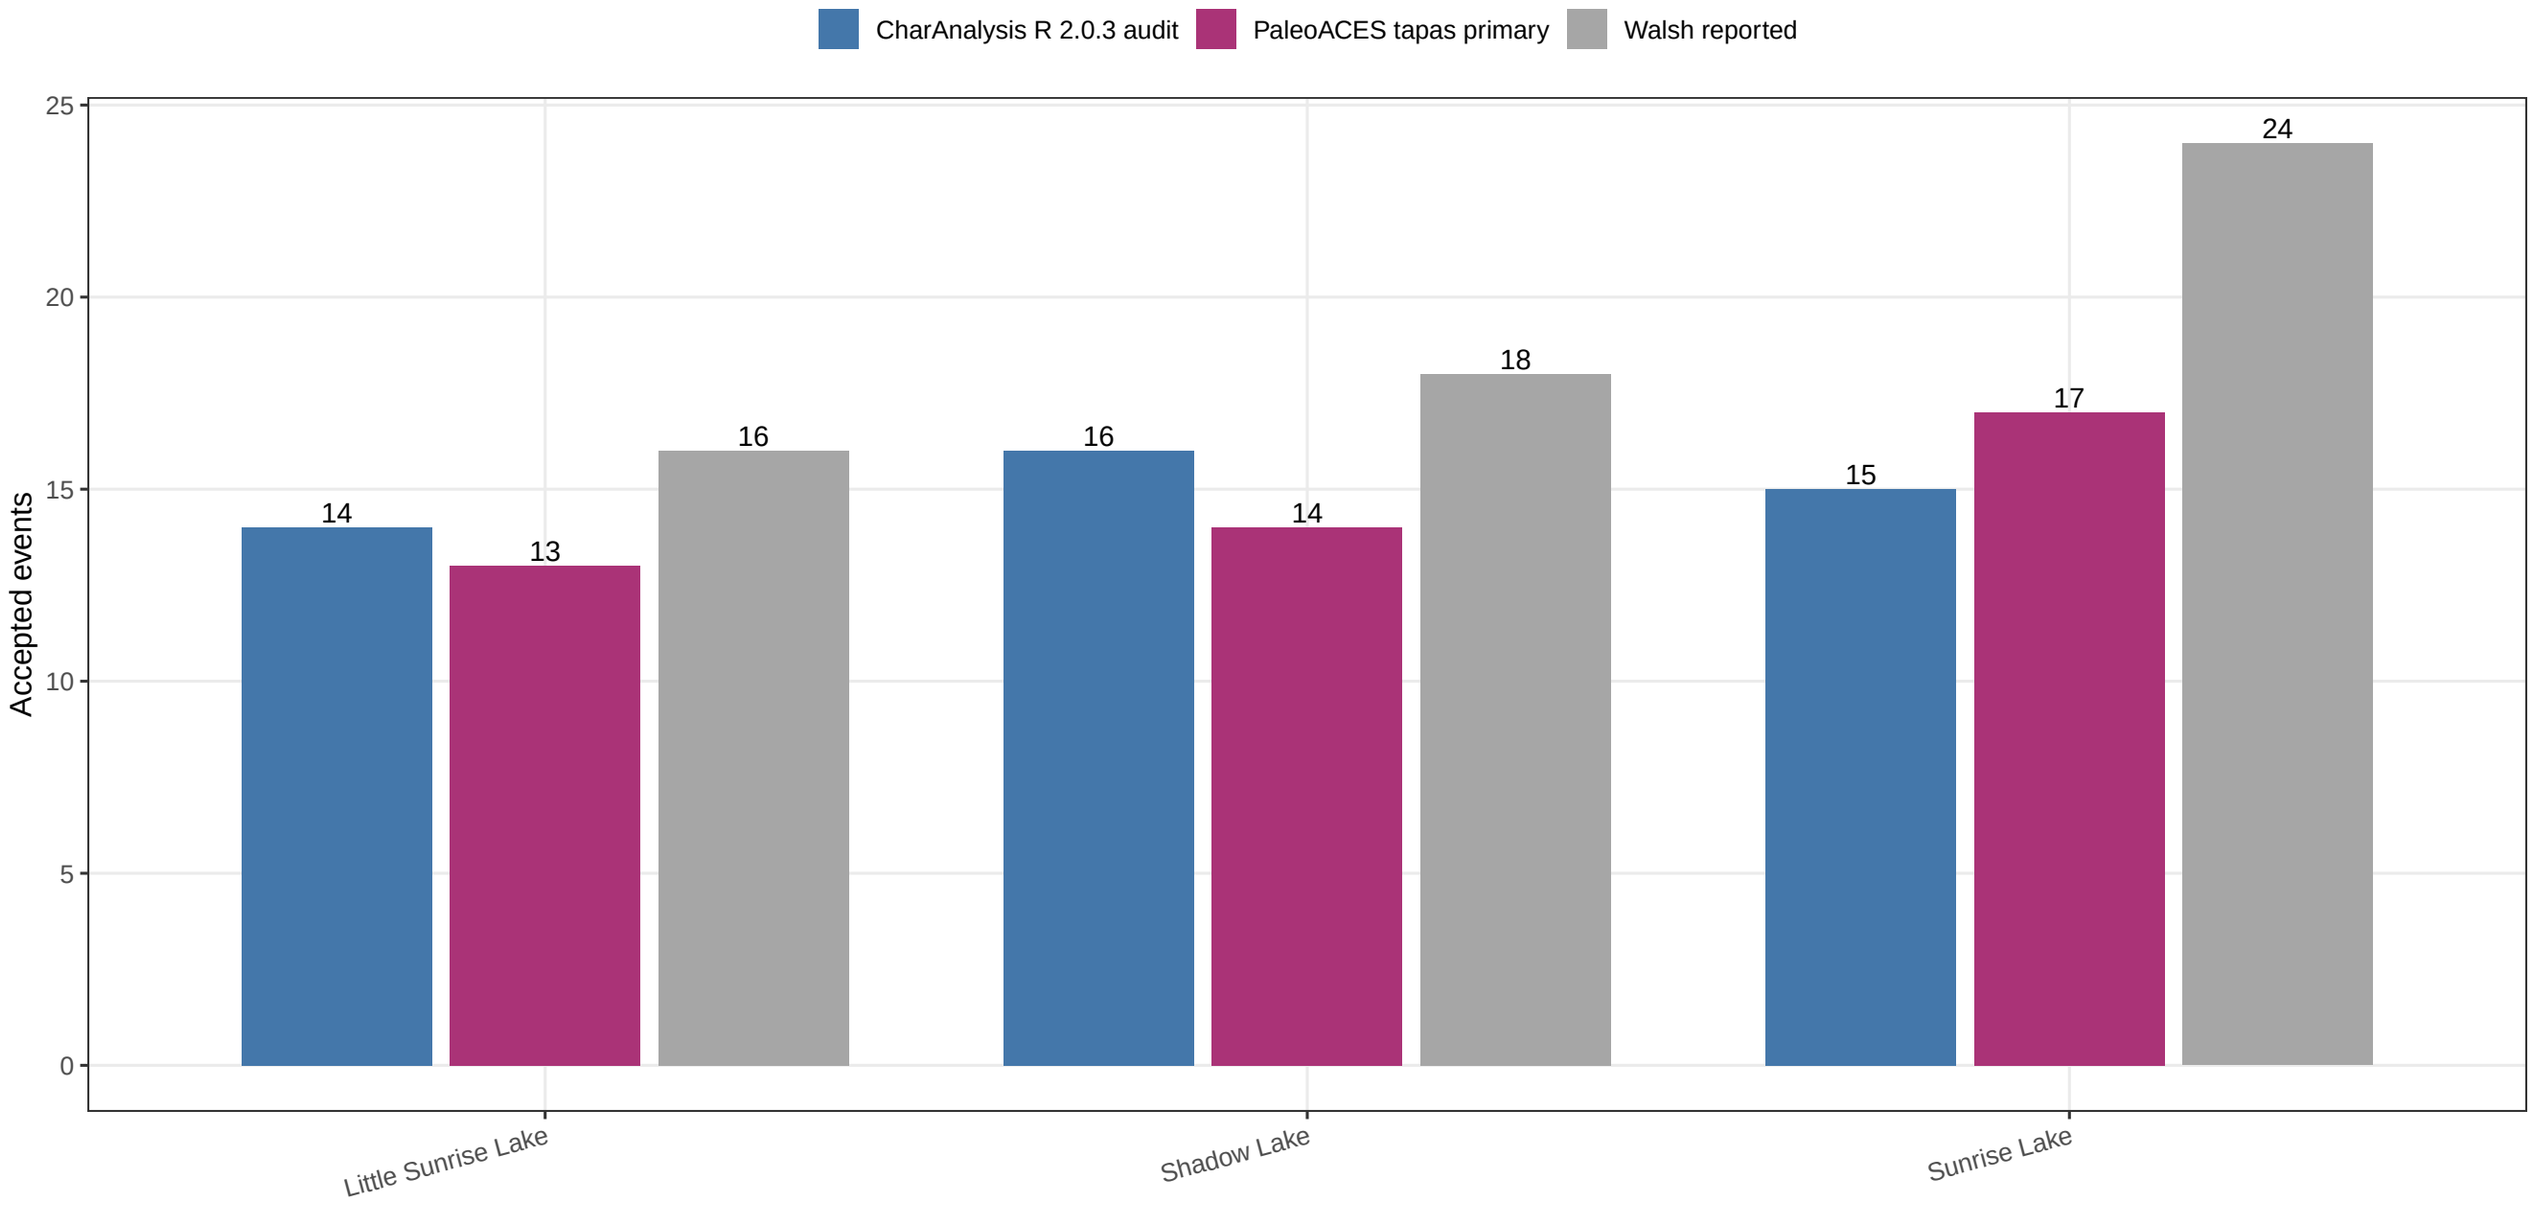

The magenta tapas catalog is authoritative downstream. The official CharAnalysis run remains a reproducibility audit; neither implementation is tuned to force the published totals.