Within−offset covariance comparison: lag_rate_per_century

10 offsets; same observations, fixed effects, REML and era/site residual variances within each offset

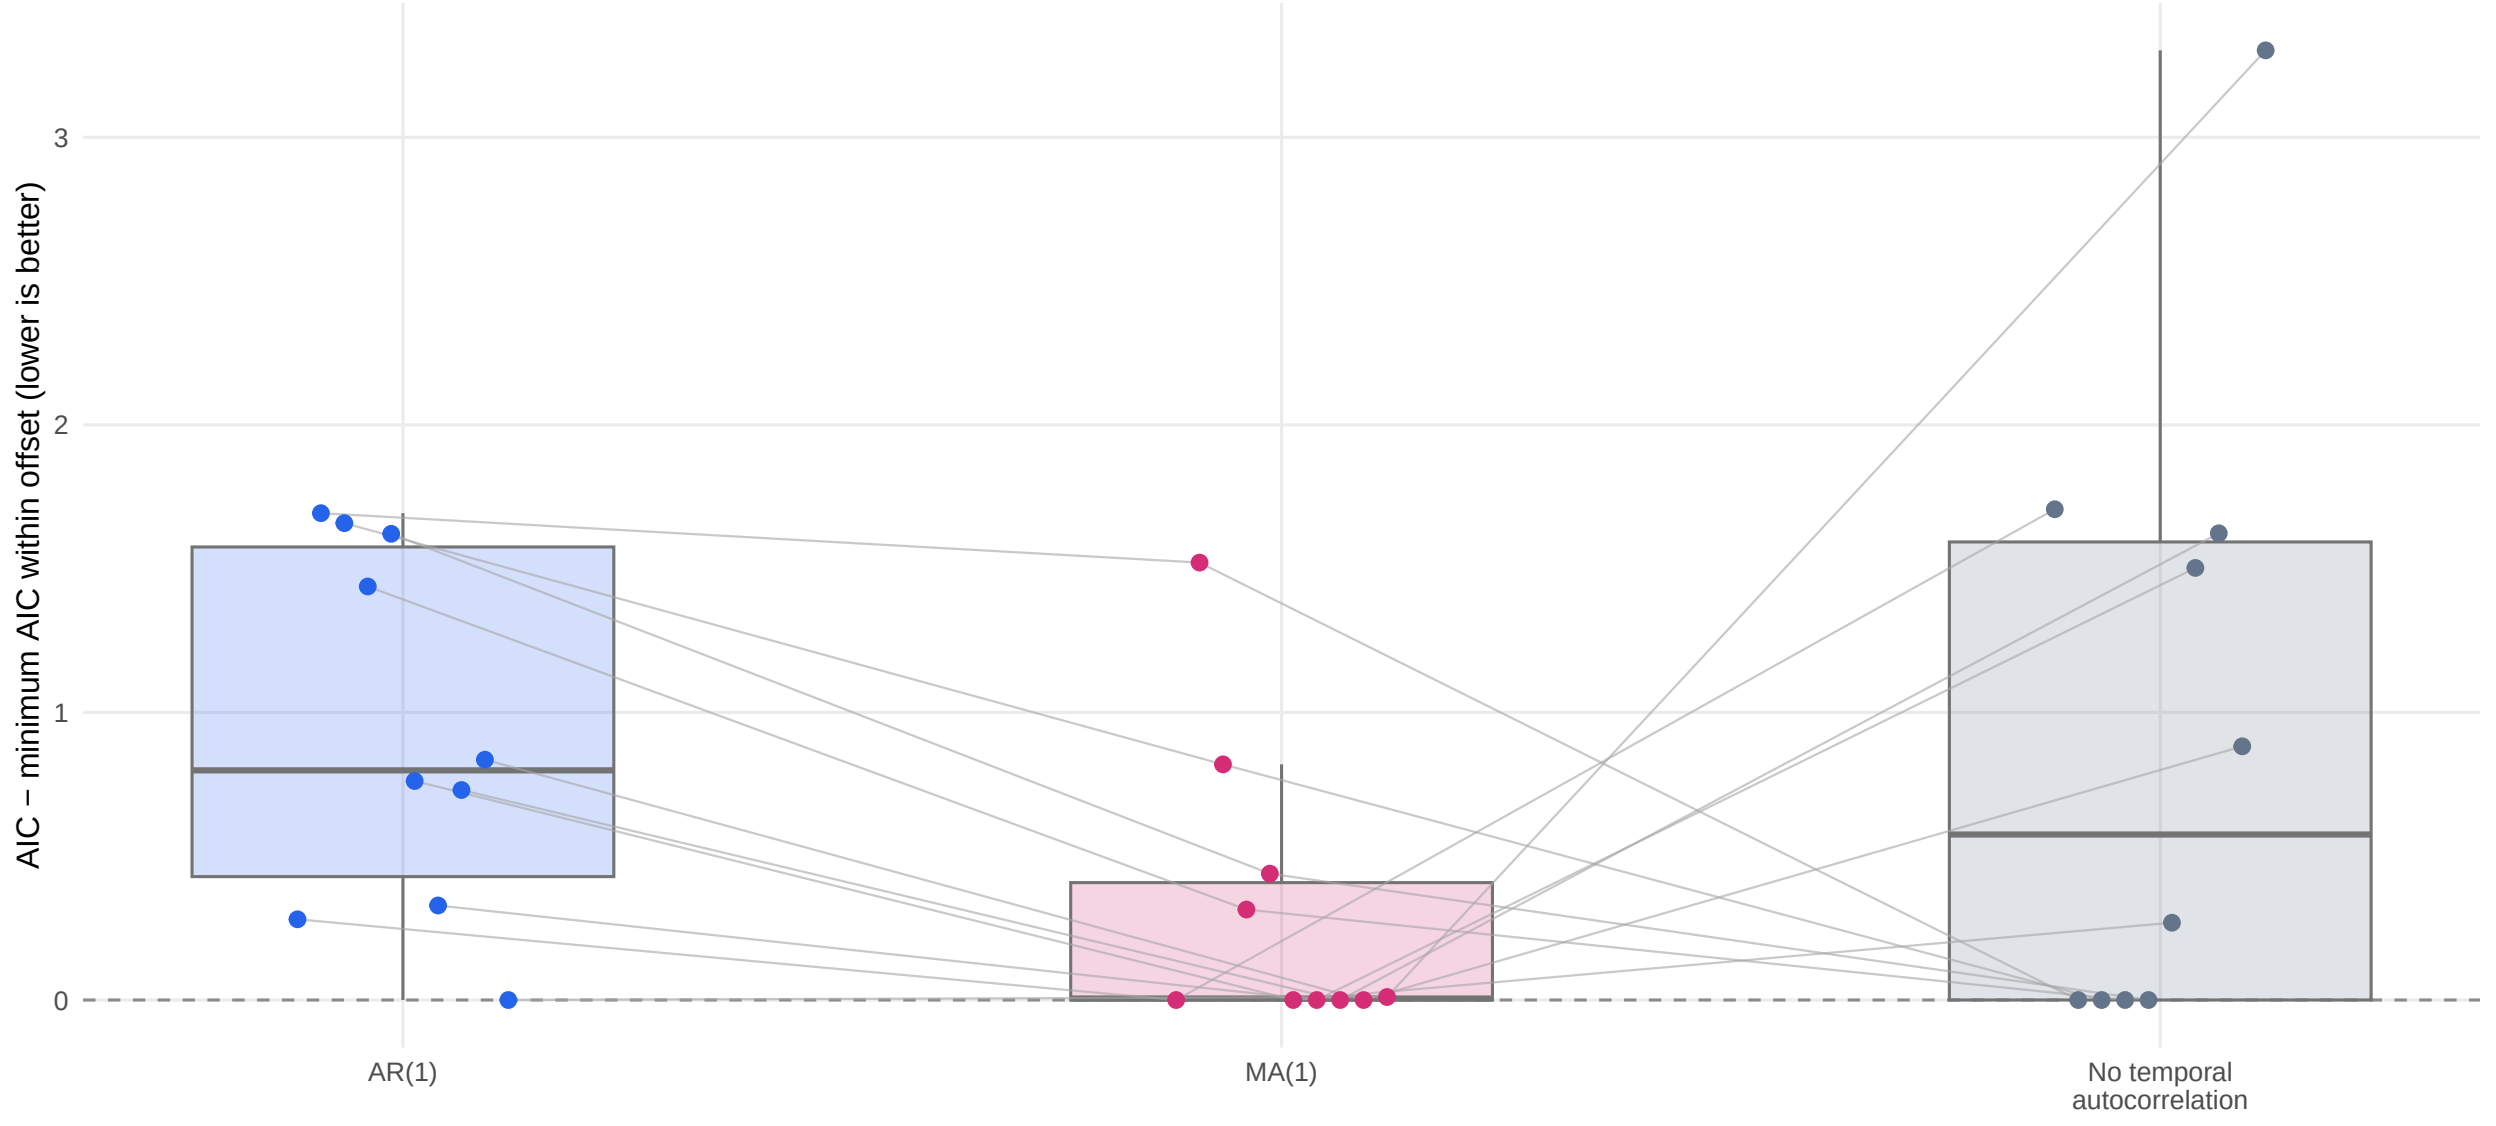

Zero identifies the lowest AIC within each offset. Boxes summarize the configured offsets; dots are individual fits.
Grey lines connect the same offset. Offsets reuse modern plots and are sensitivity fits, not independent replicates.
Raw AIC values are retained in model_comparison.csv. Covariance selection remains a scientific decision.