

EN3240: Embedded Systems Engineering

Assignment 6 — Validation/Verification & Security

Name: Thalagala B. P.
Index No: 180631J

October 6, 2022

This is an individual assignment!
Due Date: 7 October 2022 by 11.59 PM

Instructions

Please read the instructions and questions carefully. Write your answers directly in the space provided. Compile the tex document and submit the resulting PDF. This is an individual assignment. You are not allowed to take or give any help in completing this assignment.

Problem 1 (1 Point)

How many input patterns (tests) are required (minimum) to verify a 3-input OR gate completely when only binary inputs are allowed (each input can be 0 or 1)? List the inputs and expected outputs.

Problem 2 (2 Points)

How many input patterns (tests) are required (minimum) to verify a 3-input OR gate completely when only ternary inputs are allowed (each input can be 0 or 1 or x; x implies unknown which can be 0 or 1)? List the inputs.

Problem 3 (2 Points)

There are two types of processor simulation techniques - functional and cycle-accurate. Given an input assembly program, the functional simulation produces the correct output but does not provide cycle-by-cycle details. On the other hand, the pipelined simulation provides a cycle-by-cycle simulation of the pipeline to eventually produce the final result. Which one is faster in terms of performance (simulation time) and why? Why do people use the slower one, then?

Problem 4 (2 Points)

There are only two ways of combining compression and encryption:

- CASE I: compression followed by encryption.
- CASE II: encryption followed by compression.

Please indicate which is beneficial for both code size reduction and security improvement. Please explain why the other one is not suitable.

Problem 5 (8 Points)

1. Download the shadow.hex file from the “assignment6-resources” folder. This file has been encrypted using RC4 encryption. 40 bits hexadecimal key: **6D 69 74 72 65**. Decrypt the file using any available decryption tool (e.g., cryptool). Add a screenshot of the decrypted shadow.hex file content.

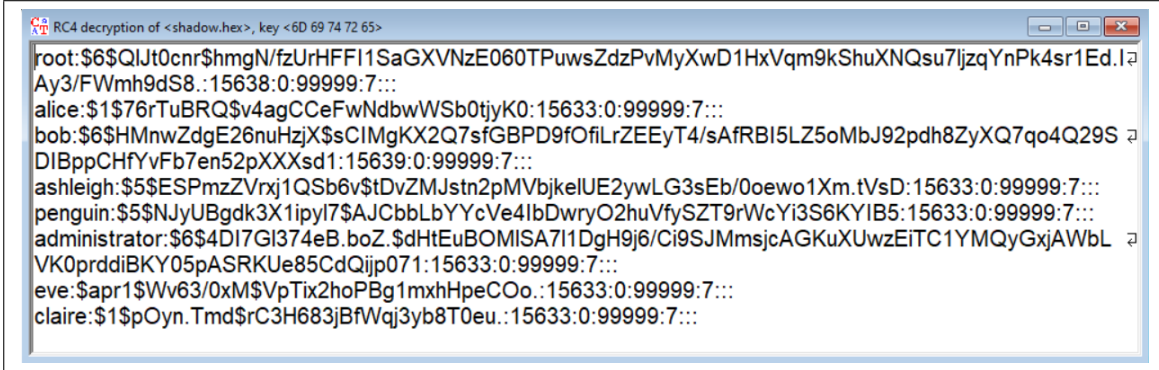


Figure 1: Content of the decrypted “shadow.hex” file

2. Run “John the Ripper” password cracking utility to crack the passwords in the decrypted shadow file with the help of the dictionary “rockyou.txt” ([Link](#)). What is the command you used to crack the passwords in the shadow file?

“Note that John can’t crack hashes of different types at the same time. If you happen to get a password file that has more than one hash type, you have to invoke John once for each hash type and you need to use this option to make John crack hashes of types other than the one it would auto-detect by default.” - abstracted from [here](#).

Hash ID	Hash format in John	Users
\$6\$	sha512crypt	root, bob, administrator
\$5\$	sha256crypt	ashleigh, penguin
\$1\$, \$apr1\$	md5crypt	alice, eve, claire

Table 1: Additional --format argument that should be passed to crack password

Note: “resources” in the following command is a user created directory to keep the password list and the decrypted shadow file.

Therefore, following commands were invoked one after the other to crack all the possible passwords in the given shadow file.

```
$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=md5crypt
$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=sha256crypt
$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=sha512crypt
```

```
bimalka98@LAP-BIMALKA98: ~/src/john/run
bimalka98@LAP-BIMALKA98:~/src/john/run$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=md5crypt
Using default input encoding: UTF-8
Loaded 3 password hashes with 3 different salts (md5crypt, crypt(3) $1$ (and variants) [MD5 256/256 AVX2 8x3])
Will run 8 OpenMP threads
Press 'q' or Ctrl-C to abort, 'h' for help, almost any other key for status
Enabling duplicate candidate password suppressor
simple (alice)
cyber123 (claire)
labs123k (eve)
3g 0:00:00:06 DONE (2022-10-06 22:25) 0.4830g/s 256865p/s 281228c/s 281228c/s lacrazy13..labelwhore
Use the "--show" option to display all of the cracked passwords reliably
Session completed.
bimalka98@LAP-BIMALKA98:~/src/john/run$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=sha256crypt
Using default input encoding: UTF-8
Loaded 2 password hashes with 2 different salts (sha256crypt, crypt(3) $5$ [SHA256 256/256 AVX2 8x])
Cost 1 (iteration count) is 5000 for all loaded hashes
Will run 8 OpenMP threads
Press 'q' or Ctrl-C to abort, 'h' for help, almost any other key for status
Enabling duplicate candidate password suppressor
pinky (penguin)
qwerty12345 (ashleigh)
2g 0:00:00:05 DONE (2022-10-06 22:26) 0.3424g/s 5610p/s 6312c/s 6312c/s smile4..dumbo
Use the "--show" option to display all of the cracked passwords reliably
Session completed.
bimalka98@LAP-BIMALKA98:~/src/john/run$ ./john --wordlist=resources/rockyou.txt --rules resources/Cry-RC4-shadow.txt --format=sha512crypt
Using default input encoding: UTF-8
Loaded 3 password hashes with 3 different salts (sha512crypt, crypt(3) $6$ [SHA512 256/256 AVX2 4x])
Cost 1 (iteration count) is 5000 for all loaded hashes
Will run 8 OpenMP threads
Press 'q' or Ctrl-C to abort, 'h' for help, almost any other key for status
Enabling duplicate candidate password suppressor
babygirl (administrator)
1g 0:00:00:50 0.00% (ETA: 2023-03-26 06:50) 0.01979g/s 2938p/s 5897c/s 5897c/s justme13..gerben
developer (bob)
2g 0:00:02:44 0.00% (ETA: 2023-01-17 10:03) 0.01215g/s 4948p/s 5869c/s 5869c/s rawlings125..ramones32
2g 0:00:04:26 0.00% (ETA: 2023-01-12 12:17) 0.007503g/s 5205p/s 5774c/s 5774c/s ple12..planetatierra
2g 0:00:11:40 0.01% (ETA: 2023-01-09 18:12) 0.002855g/s 5366p/s 5583c/s 5583c/s silo987hour321..sills1
2g 0:00:16:14 0.01% (ETA: 2023-01-09 00:40) 0.002052g/s 5409p/s 5564c/s 5564c/s mykids2@home..myjuliana
2g 0:00:19:32 0.01% (ETA: 2023-01-08 16:13) 0.001705g/s 5430p/s 5559c/s 5559c/s lala013..lakindrick
2g 0:00:20:10 0.01% (ETA: 2023-01-08 15:23) 0.001652g/s 5432p/s 5557c/s 5557c/s killerhazard..killdedax
2g 0:00:20:16 0.02% (ETA: 2023-01-08 15:20) 0.001644g/s 5433p/s 5557c/s 5557c/s kh@s@ng.h..kgonzo
Use the "--show" option to display all of the cracked passwords reliably
Session aborted
bimalka98@LAP-BIMALKA98:~/src/john/run$
```

Figure 2: Status of *John the Ripper* while cracking the passwords

It was observed that, the Estimated Time of Arrival(ETA) to crack the password of the *root* is 2023-01-XX and its progress increment really slowly. Therefore the program was aborted without trying to crack it.

3. Add a screenshot of all the cracked passwords.

```
bimalka98@LAP-BIMALKA98: ~/src/john/run
bimalka98@LAP-BIMALKA98:~/src/john/run$ ./john --show resources/Cry-RC4-shadow.txt
alice:simple:15633:0:99999:7:::
bob:developer:15639:0:99999:7:::
ashleigh:qwerty12345:15633:0:99999:7:::
penguin:pinky:15633:0:99999:7:::
administrator:babygirl:15633:0:99999:7:::
eve:labs123k:15633:0:99999:7:::
claire:cyber123:15633:0:99999:7:::

7 password hashes cracked, 1 left
bimalka98@LAP-BIMALKA98:~/src/john/run$
```

Figure 3: Status of *John the Ripper* while cracking the passwords

4. Provide recommendations to enhance the strength of the passwords.