

# EN4720: Security in Cyber-Physical Systems

## Exercise — Authentication

Name: John Doe  
Index No: XXXXX

May 7, 2023

**This is an individual exercise!**  
**Due Date: 19 May 2023 by 11.59 PM**

Content adopted from the Udacity Security Engineer Nano-Degree and ECU CSI 1101.

This exercise has to be carried out using a Linux-based PC/virtual machine. Read all the instructions and questions before attempting the exercise. Add answers under each question in the Questions section and submit the resulting PDF. All files used in this exercise can be found in *ex3-resources* folder.

### Instructions

1. Explore and understand how Unix systems store and manage passwords.
2. Download the shadow.hex file from the “files” folder. This file has been encrypted using RC4 encryption. 40 bits hexadecimal key: **5D 49 34 71 64**. Decrypt the file using any available decryption tool (e.g., cryptool).
3. Download the “500\_passwords.txt” file from the “files” folder. Run “hashcat” password cracking utility to crack the passwords in the decrypted shadow file with the help of the dictionary “500\_passwords.txt”. Please note that, to crack the passwords in the decrypted shadow file using hashcat, you need to take encrypted password fields of each user into a different file. You may rename that file as “encrypted\_passwords.txt”.
4. Download the “myhashes.txt”, “mydictionary.txt”, “myruleset.txt” files from the “files” folder. Note that, myhashes.txt contains MD5 hashes. Run a rule-based attack using “hashcat” password cracking utility to crack the passwords in the myhashes.txt file with the help of the dictionary “mydictionary.txt” and the ruleset myruleset.txt.
5. Answer the questions given below.

## Questions

1. What is the difference between `/etc/passwd` and `/etc/shadow` files? Complete Table 1.

*Your answer here*

Table 1: Difference between `/etc/passwd` and `etc/shadow` files

Attribute	<code>/etc/passwd</code>	<code>etc/shadow</code>
Number of fields		
Accessible users		

2. You will find seven fields in the `/etc/passwd` file as indicated in Figure 1. Explain the purpose of each field.

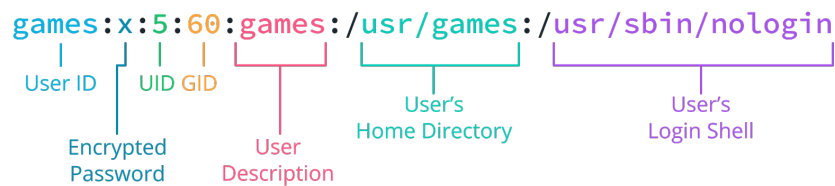


Figure 1: Example storage format of `/etc/passwd` file

*Your answer here*

3. Dump the content of your `/etc/shadow` file to the terminal using `sudo cat /etc/shadow` and add a screenshot.

*Your answer here*

4. Identify the different fields present in one line in the shadow file and explain the purpose of each field. Clearly mark the fields and provide the explanation.

*Your answer here*

5. Complete Step #2 mentioned under **Instructions**. Add a screenshot of the decrypted `shadow.hex` file content. What is the type of hash in the decrypted shadow file?

*Your answer here*

6. Complete Step #3 mentioned under **Instructions**. Add a screenshot of a part of the “500\_passwords.txt” file content using `vi/vim/nano`.

*Your answer here*

7. What is the command you used to crack the passwords in the shadow file? Briefly explain each field in the command.

*Your answer here*

8. Add a screenshot of all the cracked passwords.

*Your answer here*

9. Provide recommendations to enhance the strength of the passwords.

*Your answer here*

10. Briefly explain about “Rule-based Attack” and how it uses time and memory for the hash cracking process using a diagram.

*Your answer here*

11. Complete Step #4 mentioned under **Instructions**. Add a screenshot of the mydictionary.txt and myruleset.txt file contents. Define each rule in myruleset.txt using standard rules in the rule-based attack.

*Your answer here*

12. Add a screenshot of all the cracked passwords. Run a dictionary attack without myruleset.txt (using only the dictionary) and compare the two cracked files.

*Your answer here*