

Exam Summary (GATE CSE 2014 | Set 1 | Original Paper)

Qs. Attempted:	0 0 + 0	Correct Marks:	0 0 + 0
Correct Attempts:	0 0 + 0	Penalty Marks:	0 0 + 0
Incorrect Attempts:	0 0 + 0	Resultant Marks:	0 0 + 0

Total Questions:	65 30 + 35
Total Marks:	100 30 + 70
Exam Duration:	180 Minutes
Time Taken:	0 Minutes

EXAM RESPONSE

EXAM STATS

FEEDBACK

## Aptitude

Q #1

Multiple Choice Type

Award: 1

Penalty: 0.33

Verbal Aptitude

Which of the following options is the closest in meaning to the phrase in bold in the sentence below?

It is fascinating to see life forms **cope with** varied environmental conditions.

- A. Adopt to
- B. Adapt to
- C. Adept in
- D. Accept with

Your Answer:

Correct Answer: B

Not Attempted

Discuss

Q #2

Multiple Choice Type

Award: 1

Penalty: 0.33

Quantitative Aptitude

The roots of  $ax^2 + bx + c = 0$  are real and positive.  $a, b$  and  $c$  are real. Then  $ax^2 + b|x| + c = 0$  has

- A. no roots
- B. 2 real roots
- C. 3 real roots
- D. 4 real roots

Your Answer: Correct Answer: D Not Attempted Discuss

Q #3 Multiple Choice Type Award: 1 Penalty: 0.33 Verbal Aptitude

Choose the most appropriate word from the options given below to complete the following sentence.

She could not understand the judges awarding her the first prize, because she thought that her performance was quite \_\_\_\_\_.

- A. superb
- B. medium
- C. mediocre
- D. exhilarating

Your Answer: Correct Answer: C Not Attempted Discuss

Q #4 Multiple Choice Type Award: 1 Penalty: 0.33 Verbal Aptitude

In a press meet on the recent scam, the minister said, "The buck stops here". What did the minister convey by the statement?

- A. He wants all the money
- B. He will return the money
- C. He will assume final responsibility
- D. He will resist all enquiries

Your Answer: Correct Answer: C Not Attempted Discuss

Q #5 Numerical Type Award: 1 Penalty: 0 Quantitative Aptitude

If  $\left(z + \frac{1}{z}\right)^2 = 98$ , compute  $\left(z^2 + \frac{1}{z^2}\right)$ .

Your Answer: Correct Answer: 96 Not Attempted Discuss

Q #6 Multiple Choice Type Award: 2 Penalty: 0.67 Verbal Aptitude

The Palghat Gap (or Palakkad Gap) , a region about 30 km wide in the southern part of the Western Ghats in India, is lower than the hilly terrain to its north and south. The exact reasons for the formation of this gap are not clear. It results in the neighbouring regions of Tamil Nadu getting more rainfall from the South West monsoon and the neighbouring regions of Kerala having higher summer temperatures.

What can be inferred from this passage?

Select one:

- A. The Palghat gap is caused by high rainfall and high temperatures in southern Tamil Nadu and Kerala
- B. The regions in Tamil Nadu and Kerala that are near the Palghat Gap are low-lying
- C. The low terrain of the Palghat Gap has a significant impact on weather patterns in neighbouring parts of Tamil Nadu and Kerala
- D. Higher summer temperatures result in higher rainfall near the Palghat Gap area

Your Answer: Correct Answer: C Not Attempted Discuss

Q #7 Multiple Choice Type Award: 2 Penalty: 0.67 Verbal Aptitude

Geneticists say that they are very close to confirming the genetic roots of psychiatric illnesses such as depression and schizophrenia, and consequently, that doctors will be able to eradicate these diseases through early identification and gene therapy.

On which of the following assumptions does the statement above rely?

Select one:

- A. Strategies are now available for eliminating psychiatric illnesses
- B. Certain psychiatric illnesses have a genetic basis
- C. All human diseases can be traced back to genes and how they are expressed
- D. In the future, genetics will become the only relevant field for identifying psychiatric illnesses

Your Answer: Correct Answer: B Not Attempted Discuss

Q #8 Numerical Type Award: 2 Penalty: 0 Quantitative Aptitude

Round-trip tickets to a tourist destination are eligible for a discount of 10% on the total fare. In addition, groups of 4 or more get a discount of 5% on the total fare. If the one way single person fare is Rs 100, a group of 5 tourists purchasing round-trip tickets will be charged Rs \_\_\_\_\_

Your Answer: Correct Answer: 850 Not Attempted Discuss

Q #9 Numerical Type Award: 2 Penalty: 0 Quantitative Aptitude

In a survey, 300 respondents were asked whether they own a vehicle or not. If yes, they were further asked to mention whether they own a car or scooter or both. Their responses are tabulated below. What percent of respondents do not own a scooter?

		Men	Women
Own vehicle	Car	40	34
Own vehicle	Scooter	30	20
Own vehicle	Both	60	46
Do not own vehicle		20	50

Your Answer: Correct Answer: 48 Not Attempted Discuss

Q #10 Numerical Type Award: 2 Penalty: 0 Quantitative Aptitude

When a point inside of a tetrahedron (a solid with four triangular surfaces) is connected by straight lines to its corners, how many (new) internal planes are created with these lines?

Your Answer: Correct Answer: 6 Not Attempted Discuss

# Technical

Q #1

Multiple Choice Type

Award: 1

Penalty: 0.33

Mathematical Logic

Consider the statement

"Not all that glitters is gold"

Predicate  $\text{glitters}(x)$  is true if  $x$  glitters and predicate  $\text{gold}(x)$  is true if  $x$  is gold. Which one of the following logical formulae represents the above statement?

- A.  $\forall x : \text{glitters}(x) \Rightarrow \neg \text{gold}(x)$
- B.  $\forall x : \text{gold}(x) \Rightarrow \text{glitters}(x)$
- C.  $\exists x : \text{gold}(x) \wedge \neg \text{glitters}(x)$
- D.  $\exists x : \text{glitters}(x) \wedge \neg \text{gold}(x)$

Your Answer:

Correct Answer: D

Not Attempted

Discuss

Q #2

Numerical Type

Award: 1

Penalty: 0

Probability

Suppose you break a stick of unit length at a point chosen uniformly at random. Then the expected length of the shorter stick is \_\_\_\_\_.

Your Answer:

Correct Answer: 0.24 : 0.27

Not Attempted

Discuss

Q #3

Multiple Choice Type

Award: 1

Penalty: 0.33

DS

Let  $G = (V, E)$  be a directed graph where  $V$  is the set of vertices and  $E$  the set of edges. Then which one of the following graphs has the same strongly connected components as  $G$ ?

- A.  $G_1 = (V, E_1)$  where  $E_1 = \{(u, v) \mid (u, v) \notin E\}$
- B.  $G_2 = (V, E_2)$  where  $E_2 = \{(u, v) \mid (v, u) \in E\}$
- C.  $G_3 = (V, E_3)$  where  $E_3 = \{(u, v) \mid \text{there is a path of length } \leq 2 \text{ from } u \text{ to } v \text{ in } E\}$
- D.  $G_4 = (V_4, E)$  where  $V_4$  is the set of vertices in  $G$  which are not isolated

Your Answer:

Correct Answer: B

Not Attempted

Discuss

Q #4

Numerical Type

Award: 1

Penalty: 0

Linear Algebra

Consider the following system of equations:

- $3x + 2y = 1$
- $4x + 7z = 1$
- $x + y + z = 3$
- $x - 2y + 7z = 0$

The number of solutions for this system is \_\_\_\_\_

Your Answer:

Correct Answer: 1

Not Attempted

Discuss

Q #5

Numerical Type

Award: 1

Penalty: 0

Linear Algebra

The value of the dot product of the eigenvectors corresponding to any pair of different eigenvalues of a  $4 \times 4$  symmetric positive definite matrix is \_\_\_\_\_

Your Answer:

Correct Answer: 0

Not Attempted

Discuss

Q #6

Multiple Choice Type

Award: 1

Penalty: 0.33

Calculus

Let the function

$$f(\theta) = \begin{vmatrix} \sin \theta & \cos \theta & \tan \theta \\ \sin(\frac{\pi}{6}) & \cos(\frac{\pi}{6}) & \tan(\frac{\pi}{6}) \\ \sin(\frac{\pi}{3}) & \cos(\frac{\pi}{3}) & \tan(\frac{\pi}{3}) \end{vmatrix}$$

where

$\theta \in [\frac{\pi}{6}, \frac{\pi}{3}]$  and  $f'(\theta)$  denote the derivative of  $f$  with respect to  $\theta$ . Which of the following statements is/are TRUE?

- I. There exists  $\theta \in (\frac{\pi}{6}, \frac{\pi}{3})$  such that  $f'(\theta) = 0$
- II. There exists  $\theta \in (\frac{\pi}{6}, \frac{\pi}{3})$  such that  $f'(\theta) \neq 0$

- A. I only
- B. II only
- C. Both I and II
- D. Neither I nor II

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #7

Multiple Choice Type

Award: 1

Penalty: 0.33

Digital Logic

Consider the following Boolean expression for F:

$$F(P, Q, R, S) = PQ + \bar{P}QR + \bar{P}Q\bar{R}S$$

The minimal sum-of-products form of  $F$  is

- A.  $PQ + QR + QS$
- B.  $P + Q + R + S$
- C.  $\bar{P} + \bar{Q} + \bar{R} + \bar{S}$
- D.  $\bar{P}R + \bar{R}\bar{P}S + P$

Your Answer:

Correct Answer: A

Not Attempted

Discuss

Q #8

Numerical Type

Award: 1

Penalty: 0

Digital Logic

The base (or radix) of the number system such that the following equation holds is \_\_\_\_\_.  $\frac{312}{20} = 13.1$

Your Answer:

Correct Answer: 5

Not Attempted

Discuss

Q #9

Numerical Type

Award: 1

Penalty: 0

CO and Architecture

A machine has a 32-bit architecture, with 1-word long instructions. It has 64 registers, each of which is 32 bits long. It needs to support 45 instructions, which have an immediate operand in addition to two register operands. Assuming that the immediate operand is an unsigned integer, the maximum value of the immediate operand is \_\_\_\_\_

Your Answer:

Correct Answer: 16383

Not Attempted

Discuss

Q #10

Multiple Choice Type

Award: 1

Penalty: 0.33

Programming in C

Consider the following program in C language:

```
#include <stdio.h>

main()
{
    int i;
    int*pi = &i;

    scanf("%d",pi);
    printf("%d\n", i+5);
}
```

Which one of the following statements is **TRUE**?

- A. Compilation fails.
- B. Execution results in a run-time error.
- C. On execution, the value printed is 5 more than the address of variable  $i$ .
- D. On execution, the value printed is 5 more than the integer value entered.

Your Answer:

Correct Answer: D

Not Attempted

Discuss

Q #11

Multiple Choice Type

Award: 1

Penalty: 0.33

Algorithms

Let  $G$  be a graph with  $n$  vertices and  $m$  edges. What is the tightest upper bound on the running time of Depth First Search on  $G$ , when  $G$  is represented as an adjacency matrix?

- A.  $\Theta(n)$
- B.  $\Theta(n + m)$
- C.  $\Theta(n^2)$
- D.  $\Theta(m^2)$

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #12

Numerical Type

Award: 1

Penalty: 0

DS

Consider a rooted  $n$  node binary tree represented using pointers. The best upper bound on the time required to determine the number of subtrees having exactly 4 nodes is  $O(n^a \log^b n)$ . Then the value of  $a + 10b$  is \_\_\_\_\_.

Your Answer:

Correct Answer: 1

Not Attempted

Discuss

Q #13


Multiple Choice Type

Award: 1

Penalty: 0.33

Algorithms

Consider the directed graph below given.



Which one of the following is **TRUE**?

- A. The graph does not have any topological ordering.
- B. Both PQRS and SRQP are topological orderings.
- C. Both PSRQ and SPRQ are topological orderings.
- D. PSRQ is the only topological ordering.

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #14

Multiple Choice Type

Award: 1

Penalty: 0.33

Algorithms

Let  $P$  be quicksort program to sort numbers in ascending order using the first element as the pivot. Let  $t_1$  and  $t_2$  be the number of comparisons made by  $P$  for the inputs  $[1\ 2\ 3\ 4\ 5]$  and  $[4\ 1\ 5\ 3\ 2]$  respectively. Which one of the following holds?

- A.  $t_1 = 5$
- B.  $t_1 < t_2$
- C.  $t_1 > t_2$
- D.  $t_1 = t_2$

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #15

Multiple Choice Type

Award: 1

Penalty: 0.33

Theory of Computation

Which one of the following is **TRUE**?

- A. The language  $L = \{a^n b^n \mid n \geq 0\}$  is regular.
- B. The language  $L = \{a^n \mid n \text{ is prime}\}$  is regular.
- C. The language  $L = \{w \mid w \text{ has } 3k + 1 \text{ b's for some } k \in N \text{ with } \Sigma = \{a, b\}\}$  is regular.
- D. The language  $L = \{ww \mid w \in \Sigma^* \text{ with } \Sigma = \{0, 1\}\}$  is regular.

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #16


Multiple Choice Type

Award: 1

Penalty: 0.33

Theory of Computation

Consider the finite automaton in the following figure:

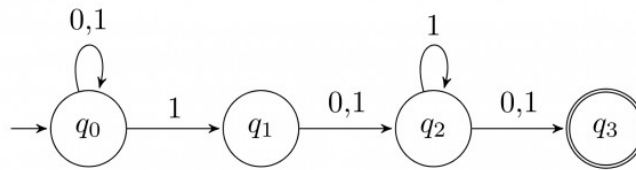

What is the set of reachable states for the input string 0011?

- A.  $\{q_0, q_1, q_2\}$
- B.  $\{q_0, q_1\}$
- C.  $\{q_0, q_1, q_2, q_3\}$
- D.  $\{q_3\}$

Your Answer: Correct Answer: A Not Attempted Discuss

**Q #17** Multiple Choice Type Award: 1 Penalty: 0.33 Compiler Design

Which one of the following is **FALSE**?

- A. A basic block is a sequence of instructions where control enters the sequence at the beginning and exits at the end.
- B. Available expression analysis can be used for common subexpression elimination.
- C. Live variable analysis can be used for dead code elimination.
- D.  $x = 4 * 5 \Rightarrow x = 20$  is an example of common subexpression elimination.

Your Answer: Correct Answer: D Not Attempted Discuss

**Q #18** Multiple Choice Type Award: 1 Penalty: 0.33 IS&Software Engineering

Match the following:

- |   |   |
|---|---|
| 1) Waterfall model                      | a) Specifications can be developed incrementally      |
| 2) Evolutionary model                   | b) Requirements compromises are inevitable            |
| 3) Component-based software engineering | c) Explicit recognition of risk                       |
| 4) Spiral development                   | d) Inflexible partitioning of the project into stages |
- A. 1-a, 2-b, 3-c, 4-d
  - B. 1-d, 2-a, 3-b, 4-c
  - C. 1-d, 2-b, 3-a, 4-c
  - D. 1-c, 2-a, 3-b, 4-d

Your Answer: Correct Answer: B Not Attempted Discuss

**Q #19** Numerical Type Award: 1 Penalty: 0 Operating System

Suppose a disk has 201 cylinders, numbered from 0 to 200. At some time the disk arm is at cylinder 100, and there is a queue of disk access requests for cylinders 30, 85, 90, 100, 105, 110, 135 and 145. If Shortest-Seek Time First (SSTF) is being used for scheduling the disk access, the request for cylinder 90 is



served after servicing \_\_\_\_\_ number of requests.

Your Answer: Correct Answer: 3 Not Attempted Discuss

Q #20 Multiple Choice Type Award: 1 Penalty: 0.33 Operating System

Which one of the following is **FALSE**?

- A. User level threads are not scheduled by the kernel.
- B. When a user level thread is blocked, all other threads of its process are blocked.
- C. Context switching between user level threads is faster than context switching between kernel level threads.
- D. Kernel level threads cannot share the code segment.

Your Answer: Correct Answer: D Not Attempted Discuss

Q #21 Multiple Choice Type Award: 1 Penalty: 0.33 Databases

Consider the relation scheme  $R = (E, F, G, H, I, J, K, L, M, N)$  and the set of functional dependencies

$$\{\{E, F\} \rightarrow \{G\}, \{F\} \rightarrow \{I, J\}, \{E, H\} \rightarrow \{K, L\}, \\ \{K\} \rightarrow \{M\}, \{L\} \rightarrow \{N\}\}$$

on  $R$ . What is the key for  $R$ ?

- A.  $\{E, F\}$
- B.  $\{E, F, H\}$
- C.  $\{E, F, H, K, L\}$
- D.  $\{E\}$

Your Answer: Correct Answer: B Not Attempted Discuss

Q #22 Multiple Choice Type Award: 1 Penalty: 0.33 Databases

Given the following statements:

**S1:** A foreign key declaration can always be replaced by an equivalent check assertion in SQL.

**S2:** Given the table  $R(a, b, c)$  where  $a$  and  $b$  together form the primary key, the following is a valid table definition.

```
CREATE TABLE S (  
  a INTEGER,  
  d INTEGER,  
  e INTEGER,  
  PRIMARY KEY (d),  
  FOREIGN KEY (a) references R)
```

Which one of the following statements is **CORRECT**?

- A. S1 is TRUE and S2 is FALSE
- B. Both S1 and S2 are TRUE
- C. S1 is FALSE and S2 is TRUE
- D. Both S1 and S2 are FALSE

Your Answer: Correct Answer: D Not Attempted Discuss

Q #23 Multiple Choice Type Award: 1 Penalty: 0.33 Computer Networks

Consider the following three statements about link state and distance vector routing protocols, for a large network with 500 network nodes and 4000 links.

[S1]: The computational overhead in link state protocols is higher than in distance vector protocols.

[S2]: A distance vector protocol (with split horizon) avoids persistent routing loops, but not a link state protocol.

[S3]: After a topology change, a link state protocol will converge faster than a distance vector protocol.

Which one of the following is correct about  $S1$ ,  $S2$ , and  $S3$ ?

- A.  $S1$ ,  $S2$ , and  $S3$  are all true.
- B.  $S1$ ,  $S2$ , and  $S3$  are all false.
- C.  $S1$  and  $S2$  are true, but  $S3$  is false.
- D.  $S1$  and  $S3$  are true, but  $S2$  is false.

Your Answer: Correct Answer: D Not Attempted Discuss

Q #24 Multiple Choice Type Award: 1 Penalty: 0.33 Computer Networks

Which of the following are used to generate a message digest by the network security protocols?

- I. RSA
  - II. SHA-1
  - III. DES
  - IV. MD5
- A. I and III only
  - B. II and III only
  - C. II and IV only
  - D. III and IV only

Your Answer: Correct Answer: C Not Attempted Discuss

Q #25 Multiple Choice Type Award: 1 Penalty: 0.33 Web Technologies

Identify the correct order in which the following actions take place in an interaction between a web browser and a web server.

1. The web browser requests a webpage using HTTP.
  2. The web browser establishes a TCP connection with the web server.
  3. The web server sends the requested webpage using HTTP.
  4. The web browser resolves the domain name using DNS.
- A. 4, 2, 1, 3
  - B. 1, 2, 3, 4
  - C. 4, 1, 2, 3
  - D. 2, 4, 1, 3

Your Answer: Correct Answer: A Not Attempted Discuss

Q #26 Numerical Type Award: 2 Penalty: 0 Computer Networks

Consider a token ring network with a length of 2 km having 10 stations including a monitoring station. The propagation speed of the signal is  $2 \times 10^8 m/s$  and the token transmission time is ignored. If each station is allowed to hold the token for  $2 \mu sec$ , the minimum time for which the monitoring station should wait (in  $\mu sec$ ) before assuming that the token is lost is \_\_\_\_\_.

Your Answer: Correct Answer: 28 : 30 Not Attempted Discuss

Q #27 Numerical Type Award: 2 Penalty: 0 Computer Networks

Let the size of congestion window of a TCP connection be 32 KB when a timeout occurs. The round trip time of the connection is 100 msec and the maximum segment size used is 2 KB. The time taken (in msec) by the TCP connection to get back to 32 KB congestion window is \_\_\_\_\_.

Your Answer: Correct Answer: 1100 : 1300 Not Attempted Discuss

Q #28 Numerical Type Award: 2 Penalty: 0 Computer Networks

Consider a selective repeat sliding window protocol that uses a frame size of 1 KB to send data on a 1.5 Mbps link with a one-way latency of 50 msec. To achieve a link utilization of 60%, the minimum number of bits required to represent the sequence number field is \_\_\_\_\_.

Your Answer: Correct Answer: 5 Not Attempted Discuss

Q #29 Multiple Choice Type Award: 2 Penalty: 0.67 Databases

Consider the following four schedules due to three transactions (indicated by the subscript) using *read* and *write* on a data item *x*, denoted by  $r(x)$  and  $w(x)$  respectively. Which one of them is conflict serializable?

- A.  $r_1(x); r_2(x); w_1(x); r_3(x); w_2(x);$
- B.  $r_2(x); r_1(x); w_2(x); r_3(x); w_1(x);$
- C.  $r_3(x); r_2(x); r_1(x); w_2(x); w_1(x);$
- D.  $r_2(x); w_2(x); r_3(x); r_1(x); w_1(x);$

Your Answer: Correct Answer: D Not Attempted Discuss

Q #30 Multiple Choice Type Award: 2 Penalty: 0.67 Databases

Given the following two statements:

**S1:** Every table with two single-valued attributes is in 1NF, 2NF, 3NF and BCNF.

**S2:**  $AB \rightarrow C, D \rightarrow E, E \rightarrow C$  is a minimal cover for the set of functional dependencies  $AB \rightarrow C, D \rightarrow E, AB \rightarrow E, E \rightarrow C$ .

Which one of the following is **CORRECT**?

- A. S1 is TRUE and S2 is FALSE.
- B. Both S1 and S2 are TRUE.
- C. S1 is FALSE and S2 is TRUE.

D. Both S1 and S2 are FALSE.

Your Answer: Correct Answer: A Not Attempted Discuss

Q #31 Multiple Choice Type Award: 2 Penalty: 0.67 Operating System

An operating system uses the *Banker's algorithm* for deadlock avoidance when managing the allocation of three resource types  $X$ ,  $Y$ , and  $Z$  to three processes  $P0$ ,  $P1$ , and  $P2$ . The table given below presents the current system state. Here, the *Allocation matrix* shows the current number of resources of each type allocated to each process and the *Max matrix* shows the maximum number of resources of each type required by each process during its execution.

	Allocation			Max		
	X	Y	Z	X	Y	Z
P0	0	0	1	8	4	3
P1	3	2	0	6	2	0
P2	2	1	1	3	3	3

There are 3 units of type  $X$ , 2 units of type  $Y$  and 2 units of type  $Z$  still available. The system is currently in a **safe** state. Consider the following independent requests for additional resources in the current state:

**REQ1:**  $P0$  requests 0 units of  $X$ , 0 units of  $Y$  and 2 units of  $Z$

**REQ2:**  $P1$  requests 2 units of  $X$ , 0 units of  $Y$  and 0 units of  $Z$

Which one of the following is **TRUE**?

- A. Only REQ1 can be permitted.
- B. Only REQ2 can be permitted.
- C. Both REQ1 and REQ2 can be permitted.
- D. Neither REQ1 nor REQ2 can be permitted.

Your Answer: Correct Answer: B Not Attempted Discuss

Q #32 Numerical Type Award: 2 Penalty: 0 Operating System

Consider the following set of processes that need to be scheduled on a single CPU. All the times are given in milliseconds.

Process Name	Arrival Time	Execution Time
A	0	6
B	3	2
C	5	4
D	7	6
E	10	3

Using the *shortest remaining time first* scheduling algorithm, the average process turnaround time (in msec) is \_\_\_\_\_.

Your Answer: Correct Answer: 7.2 Not Attempted Discuss

Q #33 Numerical Type Award: 2 Penalty: 0 Operating System

Assume that there are 3 page frames which are initially empty. If the page reference string is

1, 2, 3, 4, 2, 1, 5, 3, 2, 4, 6 the number of page faults using the optimal replacement policy is\_\_\_\_\_.

Your Answer: Correct Answer: 7 Not Attempted Discuss

**Q #34** Multiple Choice Type Award: 2 Penalty: 0.67 Compiler Design

A canonical set of items is given below

$S \rightarrow L. > R$

$Q \rightarrow R.$

On input symbol  $<$  the set has

- A. a shift-reduce conflict and a reduce-reduce conflict.
- B. a shift-reduce conflict but not a reduce-reduce conflict.
- C. a reduce-reduce conflict but not a shift-reduce conflict.
- D. neither a shift-reduce nor a reduce-reduce conflict.

Your Answer: Correct Answer: D Not Attempted Discuss

**Q #35** Multiple Choice Type Award: 2 Penalty: 0.67 Theory of Computation


Let  $L$  be a language and  $\bar{L}$  be its complement. Which one of the following is **NOT** a viable possibility?

- A. Neither  $L$  nor  $\bar{L}$  is recursively enumerable (*r. e.*).
- B. One of  $L$  and  $\bar{L}$  is r.e. but not recursive; the other is not r.e.
- C. Both  $L$  and  $\bar{L}$  are r.e. but not recursive.
- D. Both  $L$  and  $\bar{L}$  are recursive.

Your Answer: Correct Answer: C Not Attempted Discuss

**Q #36** Multiple Choice Type Award: 2 Penalty: 0.67 Theory of Computation

Which of the regular expressions given below represent the following DFA?



- I.  $0^*1(1 + 00^*1)^*$
- II.  $0^*1^*1 + 11^*0^*1$
- III.  $(0 + 1)^*1$

- A. I and II only
- B. I and III only
- C. II and III only
- D. I, II and III

Your Answer: Correct Answer: B Not Attempted Discuss

**Q #37**

Numerical Type

Award: 2

Penalty: 0

Algorithms

There are 5 bags labeled 1 to 5. All the coins in a given bag have the same weight. Some bags have coins of weight 10 gm, others have coins of weight 11 gm. I pick 1, 2, 4, 8, 16 coins respectively from bags 1 to 5. Their total weight comes out to 323 gm. Then the product of the labels of the bags having 11 gm coins is \_\_\_\_.

Your Answer:

Correct Answer: 12

Not Attempted

Discuss

**Q #38**





Multiple Choice Type

Award: 2

Penalty: 0.67

Theory of Computation

Suppose a polynomial time algorithm is discovered that correctly computes the largest clique in a given graph. In this scenario, which one of the following represents the correct Venn diagram of the complexity classes P, NP and NP Complete (NPC)?

- NP
- A. 
- B. 
- C. 
- D. 

Your Answer:

Correct Answer: D

Not Attempted

Discuss

**Q #39**

Numerical Type

Award: 2

Penalty: 0

Algorithms

The minimum number of comparisons required to find the minimum and the maximum of 100 numbers is \_\_\_\_\_

Your Answer:

Correct Answer: 147.1 : 148.1

Not Attempted

Discuss

**Q #40**

Multiple Choice Type

Award: 2

Penalty: 0.67

DS

Consider a hash table with 9 slots. The hash function is  $h(k) = k \bmod 9$ . The collisions are resolved by chaining. The following 9 keys are inserted in the order: 5, 28, 19, 15, 20, 33, 12, 17, 10. The maximum, minimum, and average chain lengths in the hash table, respectively, are

- A. 3, 0, and 1
- B. 3, 3, and 3
- C. 4, 0, and 1
- D. 3, 0, and 2

Your Answer:

Correct Answer: A

Not Attempted

Discuss

**Q #41**

Multiple Choice Type

Award: 2

Penalty: 0.67

Algorithms

Consider the following C function in which **size** is the number of elements in the array **E**:

```
int MyX(int *E, unsigned int size)
{
    int Y = 0;
    int Z;
    int i, j, k;

    for(i = 0; i < size; i++)
        Y = Y + E[i];

    for(i=0; i < size; i++)
        for(j = i; j < size; j++)
        {
            Z = 0;
            for(k = i; k <= j; k++)
                Z = Z + E[k];
            if(Z > Y)
                Y = Z;
        }
    return Y;
}
```

The value returned by the function **MyX** is the

- A. maximum possible sum of elements in any sub-array of array **E**.
- B. maximum element in any sub-array of array **E**.
- C. sum of the maximum elements in all possible sub-arrays of array **E**.
- D. the sum of all the elements in the array **E**.

Your Answer:

Correct Answer: A

Not Attempted

Discuss

**Q #42**

Multiple Choice Type

Award: 2

Penalty: 0.67

Algorithms

Consider the following pseudo code. What is the total number of multiplications to be performed?

```
D = 2
for i = 1 to n do
  for j = i to n do
    for k = j + 1 to n do
      D = D * 3
```

- A. Half of the product of the 3 consecutive integers.
- B. One-third of the product of the 3 consecutive integers.
- C. One-sixth of the product of the 3 consecutive integers.
- D. None of the above.

Your Answer: Correct Answer: C Not Attempted Discuss

Q #43 Numerical Type Award: 2 Penalty: 0 CO and Architecture

Consider a 6-stage instruction pipeline, where all stages are perfectly balanced. Assume that there is no cycle-time overhead of pipelining. When an application is executing on this 6-stage pipeline, the speedup achieved with respect to non-pipelined execution if 25% of the instructions incur 2 pipeline stall cycles is \_\_\_\_\_

Your Answer: Correct Answer: 4 Not Attempted Discuss

Q #44 Multiple Choice Type Award: 2 Penalty: 0.67 CO and Architecture

An access sequence of cache block addresses is of length  $N$  and contains  $n$  unique block addresses. The number of unique block addresses between two consecutive accesses to the same block address is bounded above by  $k$ . What is the miss ratio if the access sequence is passed through a cache of associativity  $A \geq k$  exercising least-recently-used replacement policy?


- A.  $\left(\frac{n}{N}\right)$
- B.  $\left(\frac{1}{N}\right)$
- C.  $\left(\frac{1}{A}\right)$
- D.  $\left(\frac{k}{n}\right)$

Your Answer: Correct Answer: A Not Attempted Discuss

Q #45 Multiple Choice Type Award: 2 Penalty: 0.67 Digital Logic

Consider the 4-to-1 multiplexer with two select lines  $S_1$  and  $S_0$  given below



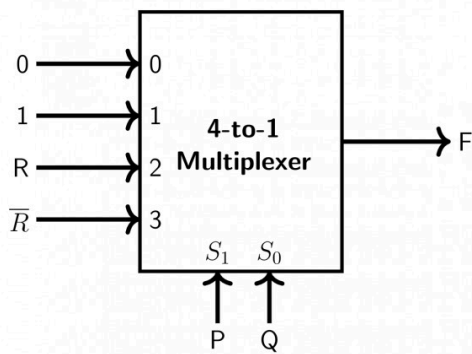

The minimal sum-of-products form of the Boolean expression for the output  $F$  of the multiplexer is

- A.  $\bar{P}Q + Q\bar{R} + P\bar{Q}R$
- B.  $\bar{P}Q + \bar{P}Q\bar{R} + PQ\bar{R} + P\bar{Q}R$
- C.  $\bar{P}QR + \bar{P}Q\bar{R} + Q\bar{R} + P\bar{Q}R$
- D.  $PQ\bar{R}$

Your Answer: Correct Answer: A Not Attempted Discuss

**Q #46** Numerical Type Award: 2 Penalty: 0 Calculus

The function  $f(x) = x \sin x$  satisfies the following equation:

$$f''(x) + f(x) + t \cos x = 0$$

The value of  $t$  is\_\_\_\_\_.

Your Answer: Correct Answer: -2 Not Attempted Discuss

**Q #47** Multiple Choice Type Award: 2 Penalty: 0.67 Calculus

A function  $f(x)$  is continuous in the interval  $[0, 2]$ . It is known that  $f(0) = f(2) = -1$  and  $f(1) = 1$ . Which one of the following statements must be true?

- A. There exists a  $y$  in the interval  $(0, 1)$  such that  $f(y) = f(y + 1)$
- B. For every  $y$  in the interval  $(0, 1)$ ,  $f(y) = f(2 - y)$
- C. The maximum value of the function in the interval  $(0, 2)$  is 1
- D. There exists a  $y$  in the interval  $(0, 1)$  such that  $f(y) = -f(2 - y)$

Your Answer: Correct Answer: A Not Attempted Discuss

**Q #48** Numerical Type Award: 2 Penalty: 0 Probability

Four fair six-sided dice are rolled. The probability that the sum of the results being 22 is  $\frac{X}{1296}$ . The value of  $X$  is \_\_\_\_\_

Your Answer: Correct Answer: 10 Not Attempted Discuss

Q #49

Numerical Type

Award: 2

Penalty: 0

Combinatory

A pennant is a sequence of numbers, each number being 1 or 2. An  $n$ -pennant is a sequence of numbers with sum equal to  $n$ . For example,  $(1, 1, 2)$  is a 4-pennant. The set of all possible 1-pennants is  $(1)$ , the set of all possible 2-pennants is  $(2), (1, 1)$  and the set of all 3-pennants is  $(2, 1), (1, 1, 1), (1, 2)$ . Note that the pennant  $(1, 2)$  is not the same as the pennant  $(2, 1)$ . The number of 10-pennants is\_\_\_\_\_

Your Answer:

Correct Answer: 89

Not Attempted

Discuss

Q #50

Numerical Type

Award: 2

Penalty: 0

Set Theory &amp; Algebra

Let  $S$  denote the set of all functions  $f : \{0, 1\}^4 \rightarrow \{0, 1\}$ . Denote by  $N$  the number of functions from  $S$  to the set  $\{0, 1\}$ . The value of  $\log_2 \log_2 N$  is \_\_\_\_\_.

Your Answer:

Correct Answer: 16

Not Attempted

Discuss

Q #51

Numerical Type

Award: 2

Penalty: 0

Graph Theory

Consider an undirected graph  $G$  where self-loops are not allowed. The vertex set of  $G$  is  $\{(i, j) \mid 1 \leq i \leq 12, 1 \leq j \leq 12\}$ . There is an edge between  $(a, b)$  and  $(c, d)$  if  $|a - c| \leq 1$  and  $|b - d| \leq 1$ . The number of edges in this graph is\_\_\_\_\_.

Your Answer:

Correct Answer: 506

Not Attempted

Discuss

Q #52

Multiple Choice Type

Award: 2

Penalty: 0.67

Graph Theory

An ordered  $n$ -tuple  $(d_1, d_2, \dots, d_n)$  with  $d_1 \geq d_2 \geq \dots \geq d_n$  is called *graphic* if there exists a simple undirected graph with  $n$  vertices having degrees  $d_1, d_2, \dots, d_n$  respectively. Which one of the following 6-tuples is NOT graphic?

- A.  $(1, 1, 1, 1, 1, 1)$
- B.  $(2, 2, 2, 2, 2, 2)$
- C.  $(3, 3, 3, 1, 0, 0)$
- D.  $(3, 2, 1, 1, 1, 0)$

Your Answer:

Correct Answer: C

Not Attempted

Discuss

Q #53

Multiple Choice Type

Award: 2

Penalty: 0.67

Mathematical Logic

Which one of the following propositional logic formulas is TRUE when exactly two of  $p, q$  and  $r$  are TRUE?

- A.  $((p \leftrightarrow q) \wedge r) \vee (p \wedge q \wedge \sim r)$
- B.  $(\sim (p \leftrightarrow q) \wedge r) \vee (p \wedge q \wedge \sim r)$
- C.  $((p \rightarrow q) \wedge r) \vee (p \wedge q \wedge \sim r)$
- D.  $(\sim (p \leftrightarrow q) \wedge r) \wedge (p \wedge q \wedge \sim r)$

Your Answer:

Correct Answer: B

Not Attempted

Discuss

**Q #54**

Multiple Choice Type

Award: 2

Penalty: 0.67

Databases

Given the following schema:

**employees(emp-id, first-name, last-name, hire-date, dept-id, salary)**

**departments(dept-id, dept-name, manager-id, location-id)**

You want to display the last names and hire dates of all latest hires in their respective departments in the location ID 1700. You issue the following query:

```
SQL>SELECT last-name, hire-date
FROM employees
WHERE (dept-id, hire-date) IN
(SELECT dept-id, MAX(hire-date)
FROM employees JOIN departments USING(dept-id)
WHERE location-id =1700
GROUP BY dept-id);
```

What is the outcome?

- A. It executes but does not give the correct result
- B. It executes and gives the correct result.
- C. It generates an error because of pairwise comparison.
- D. It generates an error because of the GROUP BY clause cannot be used with table joins in a sub-query.

Your Answer:

Correct Answer: B

Not Attempted

Discuss

**Q #55**

Numerical Type

Award: 2

Penalty: 0

CO and Architecture

Consider two processors  $P_1$  and  $P_2$  executing the same instruction set. Assume that under identical conditions, for the same input, a program running on  $P_2$  takes 25% less time but incurs 20% more CPI (clock cycles per instruction) as compared to the program running on  $P_1$ . If the clock frequency of  $P_1$  is 1GHZ, then the clock frequency of  $P_2$  (in GHz) is \_\_\_\_\_.

Your Answer:

Correct Answer: 1.6

Not Attempted

Discuss