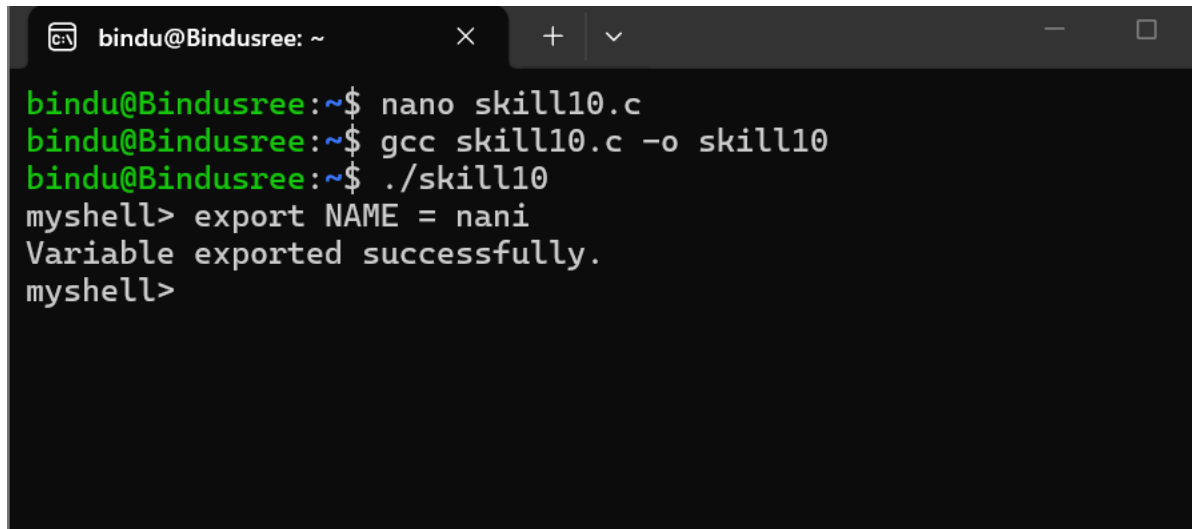


10. To Retrieve Current Directory, Display Path, Process Exit Requests, Cleanup Resources, Save State, Verify Correct Behavior.

To Parse Export Syntax, Update Environment Variables, Validate Names, Handle Existing Variables, Export to Child Processes, Test Functionality.

A terminal window with a dark background and light green text. The window title bar shows 'bindu@Bindusree: ~' and standard window controls. The terminal content shows a sequence of commands and their outputs: 'nano skill10.c' is executed; 'gcc skill10.c -o skill10' is executed; './skill10' is executed; 'myshell> export NAME = nani' is executed, followed by the output 'Variable exported successfully.'; and finally 'myshell>' is shown at the prompt.

```
bindu@Bindusree:~$ nano skill10.c
bindu@Bindusree:~$ gcc skill10.c -o skill10
bindu@Bindusree:~$ ./skill10
myshell> export NAME = nani
Variable exported successfully.
myshell>
```

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <limits.h>

int main() {
    char input[200];

    while (1) {
        printf("myshell> ");
        fflush(stdout);

        fgets(input, sizeof(input), stdin);
        input[strcspn(input, "\n")] = '\0';

        // pwd command
        if (strcmp(input, "pwd") == 0) {
            char cwd[PATH_MAX];

            if (getcwd(cwd, sizeof(cwd)) != NULL)
                printf("%s\n", cwd);
            else
                perror("getcwd");
        }

        // export command
        else if (strncmp(input, "export ", 7) == 0) {
            char *variable = input + 7;

            if (putenv(variable) == 0)
                printf("Variable exported successfully.\n");
            else
                perror("export");
        }

        // exit command
    }
}
```

```
// else command
else if (strcmp(input, "exit") == 0) {
    printf("Exiting shell...\n");
    break;
}

else if (strlen(input) == 0) {
    continue;
}

else {
    printf("Unknown command: %s\n", input);
}
}

return 0;
```