


2.Input

PIPELINES

1. Input:

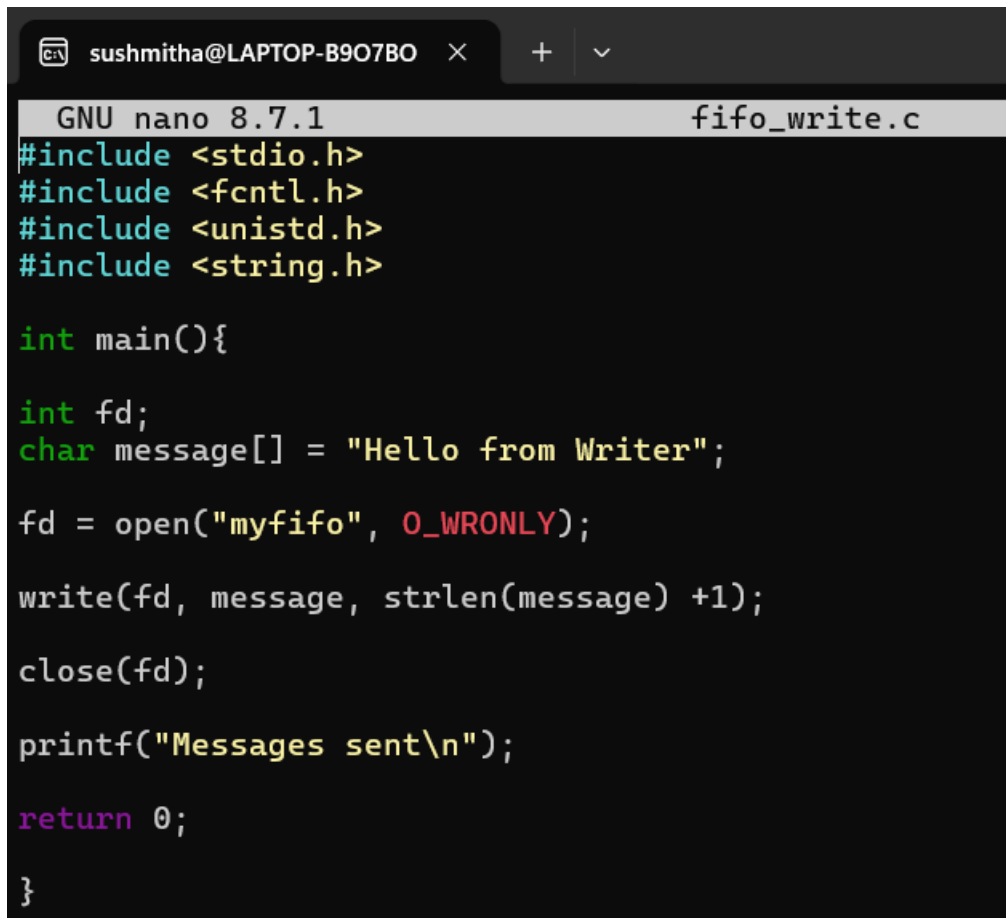

```
sushmitha@LAPTOP-B9O7BO x + v
GNU nano 8.7.1 fifo_write.c
#include <stdio.h>
#include <fcntl.h>
#include <unistd.h>
#include <string.h>

int main(){

int fd;
char message[] = "Hello from Writer";

fd = open("myfifo", O_WRONLY);

write(fd, message, strlen(message) +1);

close(fd);


printf("Messages sent\n");

return 0;

}
```

Output:

2.Input:

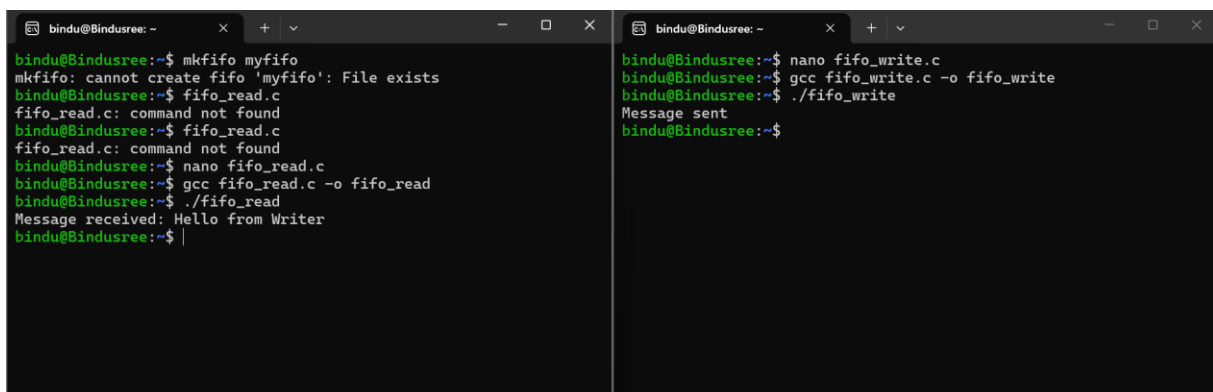


```
bindu@Bindusree: ~ x + v - □ x
bindu@Bindusree:~$ mkfifo myfifo
mkfifo: cannot create fifo 'myfifo': File exists
bindu@Bindusree:~$ fifo_read.c
fifo_read.c: command not found
bindu@Bindusree:~$ fifo_read.c
fifo_read.c: command not found
bindu@Bindusree:~$ nano fifo_read.c
bindu@Bindusree:~$ gcc fifo_read.c -o fifo_read
bindu@Bindusree:~$ ./fifo_read
Message received: Hello from Writer
bindu@Bindusree:~$

bindu@Bindusree: ~ x + v - □ x
bindu@Bindusree:~$ nano fifo_write.c
bindu@Bindusree:~$ gcc fifo_write.c -o fifo_write
bindu@Bindusree:~$ ./fifo_write
Message sent
bindu@Bindusree:~$
```

2.Input


2.Input

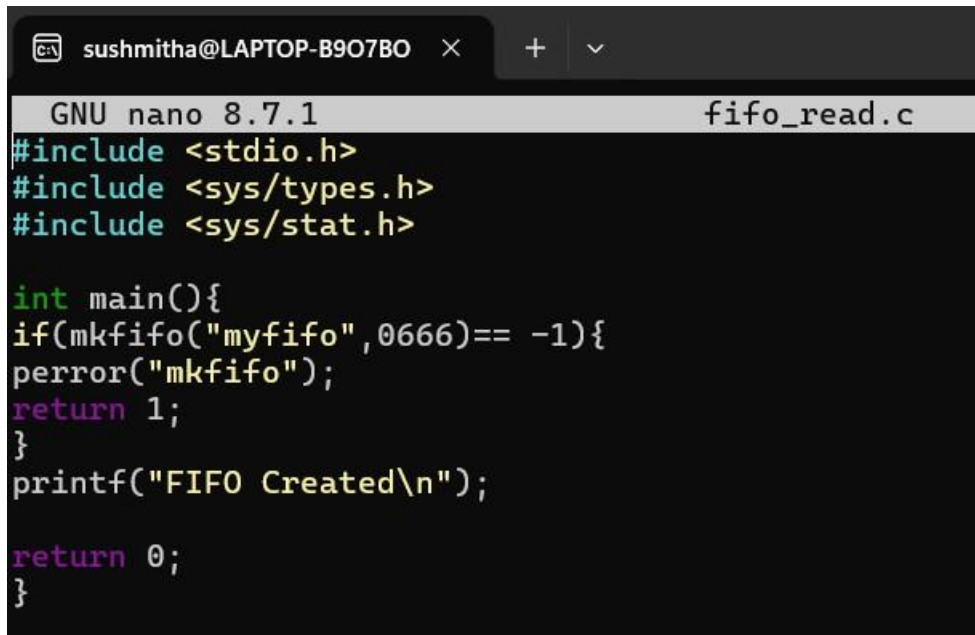

```
sushmitha@LAPTOP-B9O7BO  ×  +  ▾  
GNU nano 8.7.1                                fifo_read.c  
#include <stdio.h>  
#include <sys/types.h>  
#include <sys/stat.h>  
  
int main(){  
if(mkfifo("myfifo",0666)== -1){  
perror("mkfifo");  
return 1;  
}  
printf("FIFO Created\n");  
  
return 0;  
}
```

Output:

3.Input:

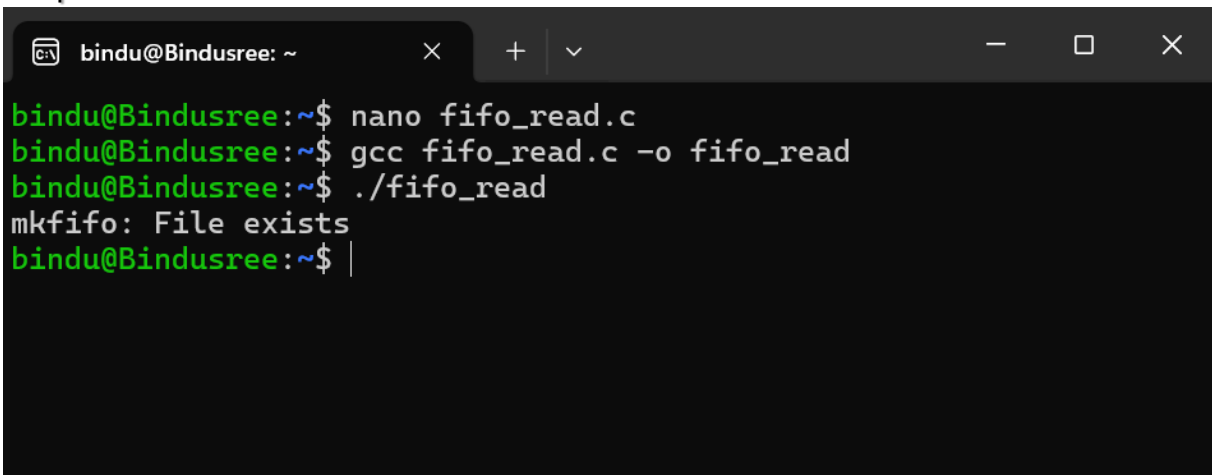

```
bindu@Bindusree: ~  ×  +  ▾  -  □  ×  
bindu@Bindusree:~$ nano fifo_read.c  
bindu@Bindusree:~$ gcc fifo_read.c -o fifo_read  
bindu@Bindusree:~$ ./fifo_read  
mkfifo: File exists  
bindu@Bindusree:~$ |
```